

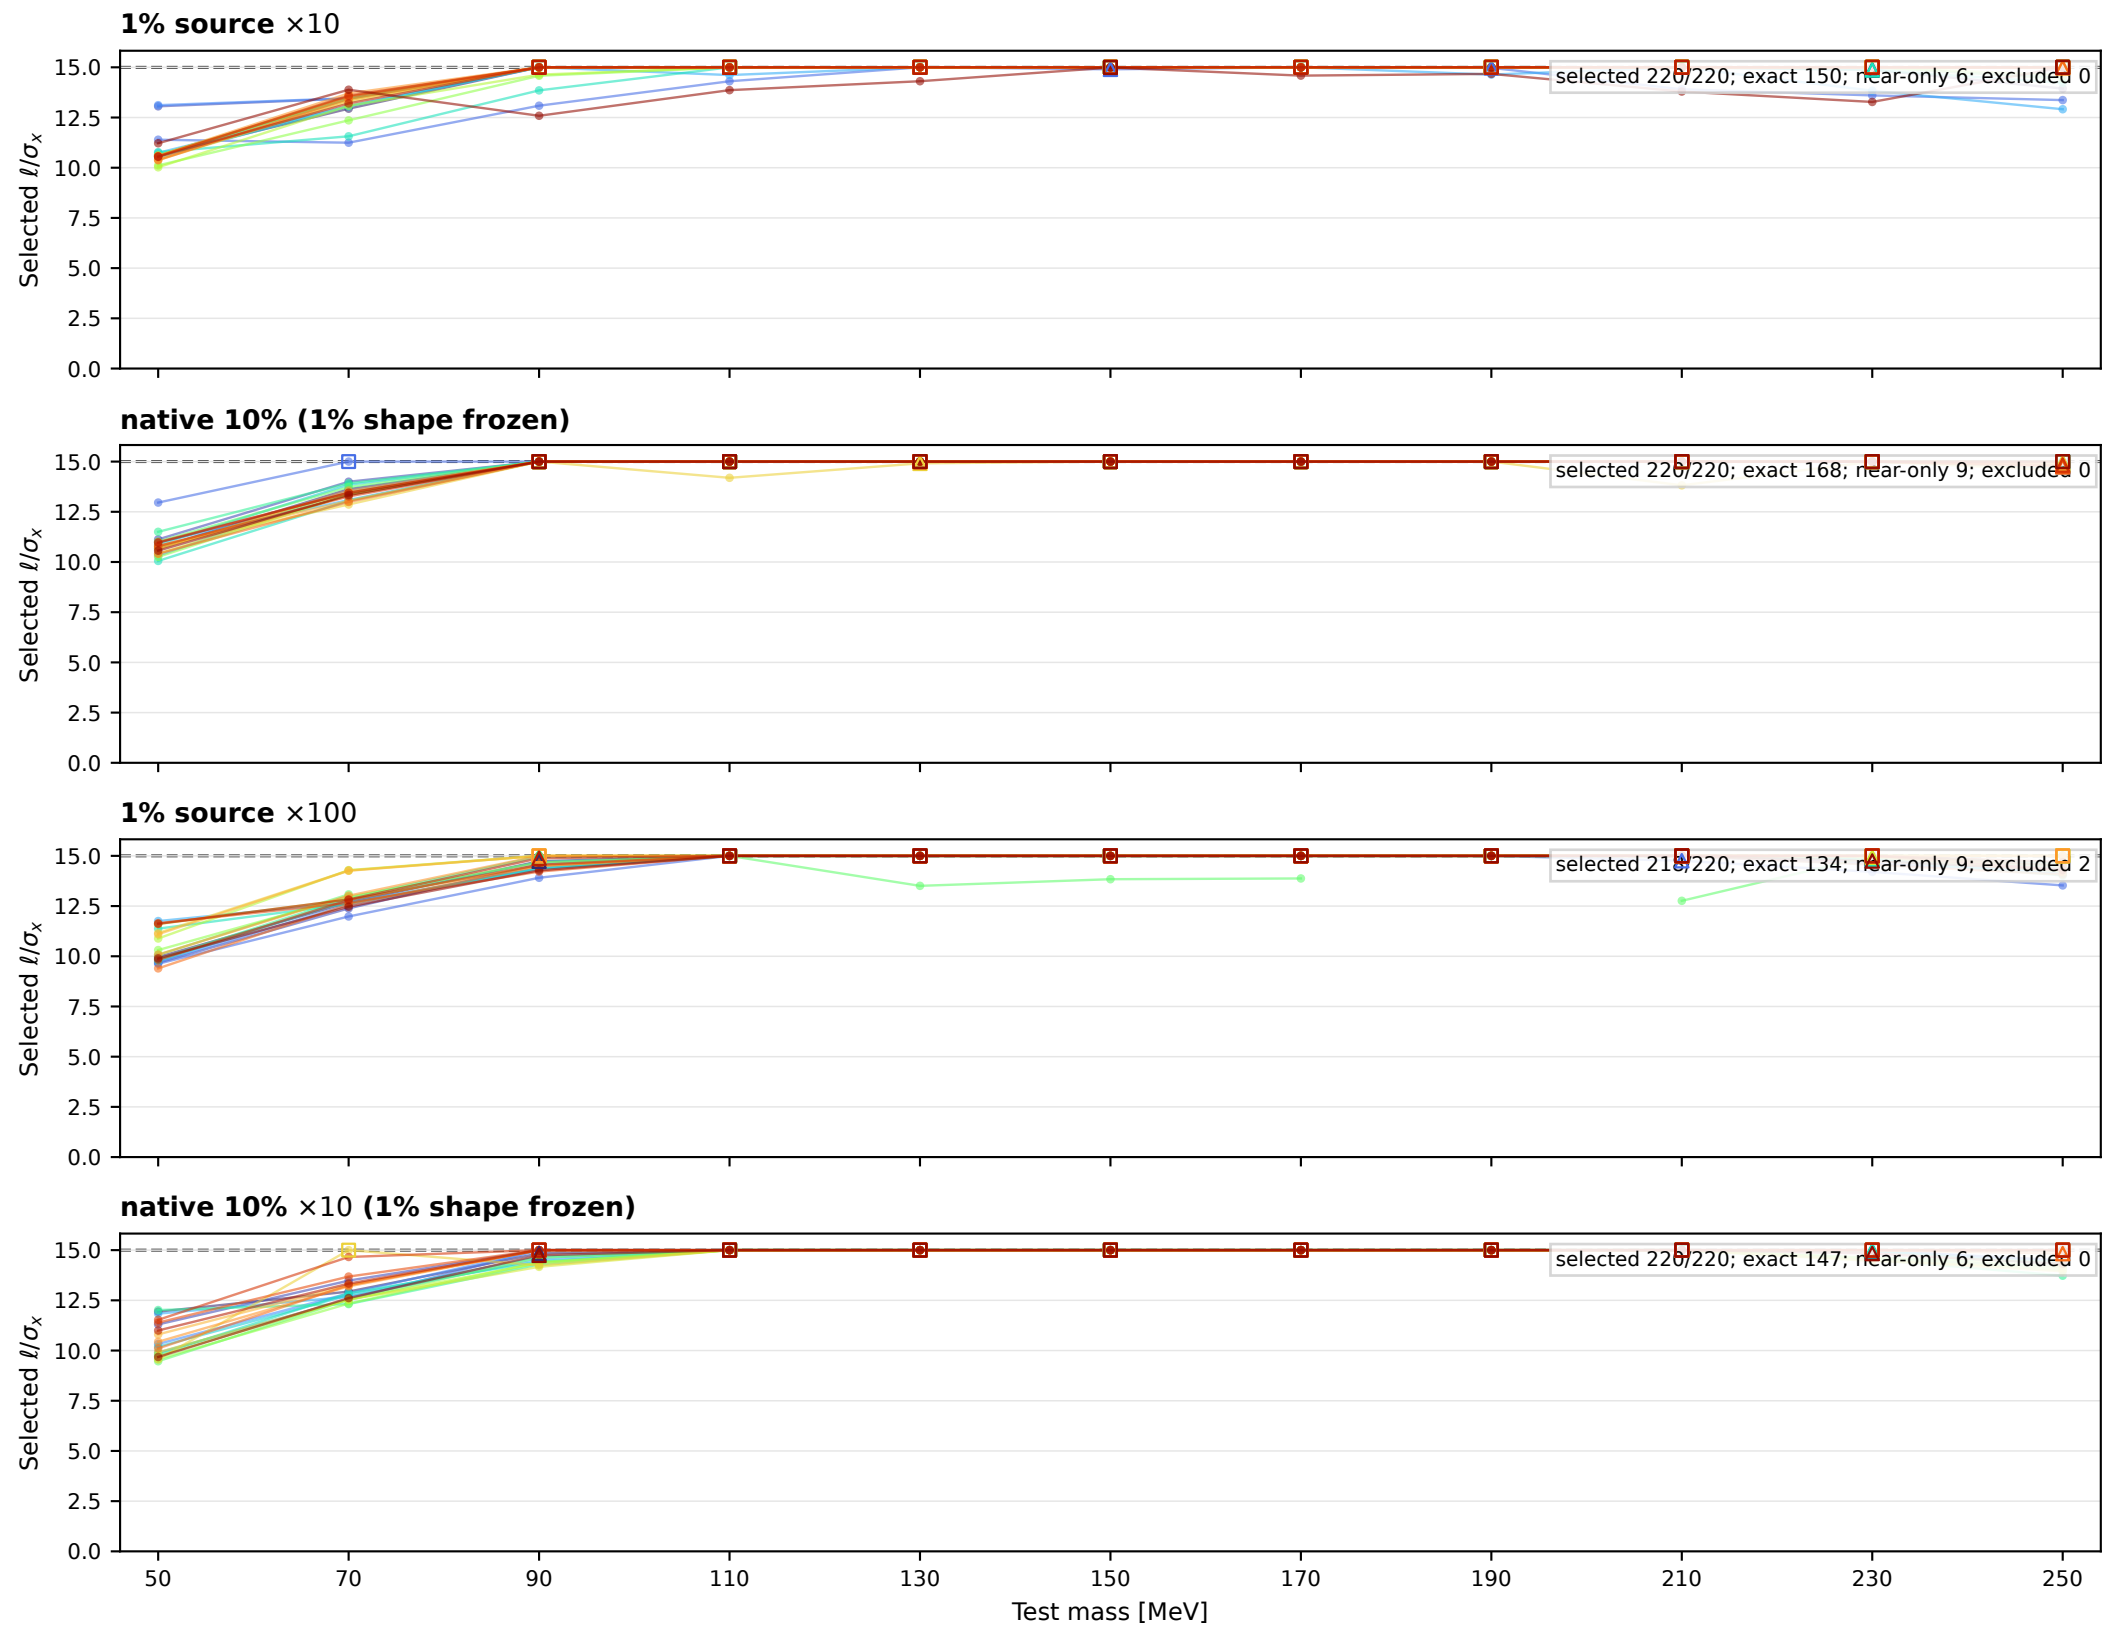


2021 rigid threshold stress mean: raw selected length trajectories, upper factor 15
20 background toys per lane; 50:20:250 MeV; reproducible selected branches only

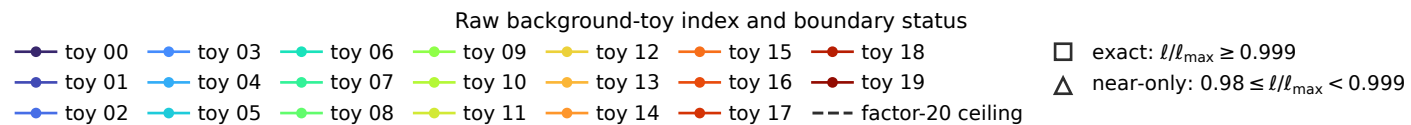



Background-only pull-blind optimizer diagnostic. Gaps denote excluded optimizer states. The tested ceiling is not a factor/card selection.

2021 rigid threshold stress mean: raw selected length trajectories, upper factor 20
 20 background toys per lane; 50:20:250 MeV; reproducible selected branches only

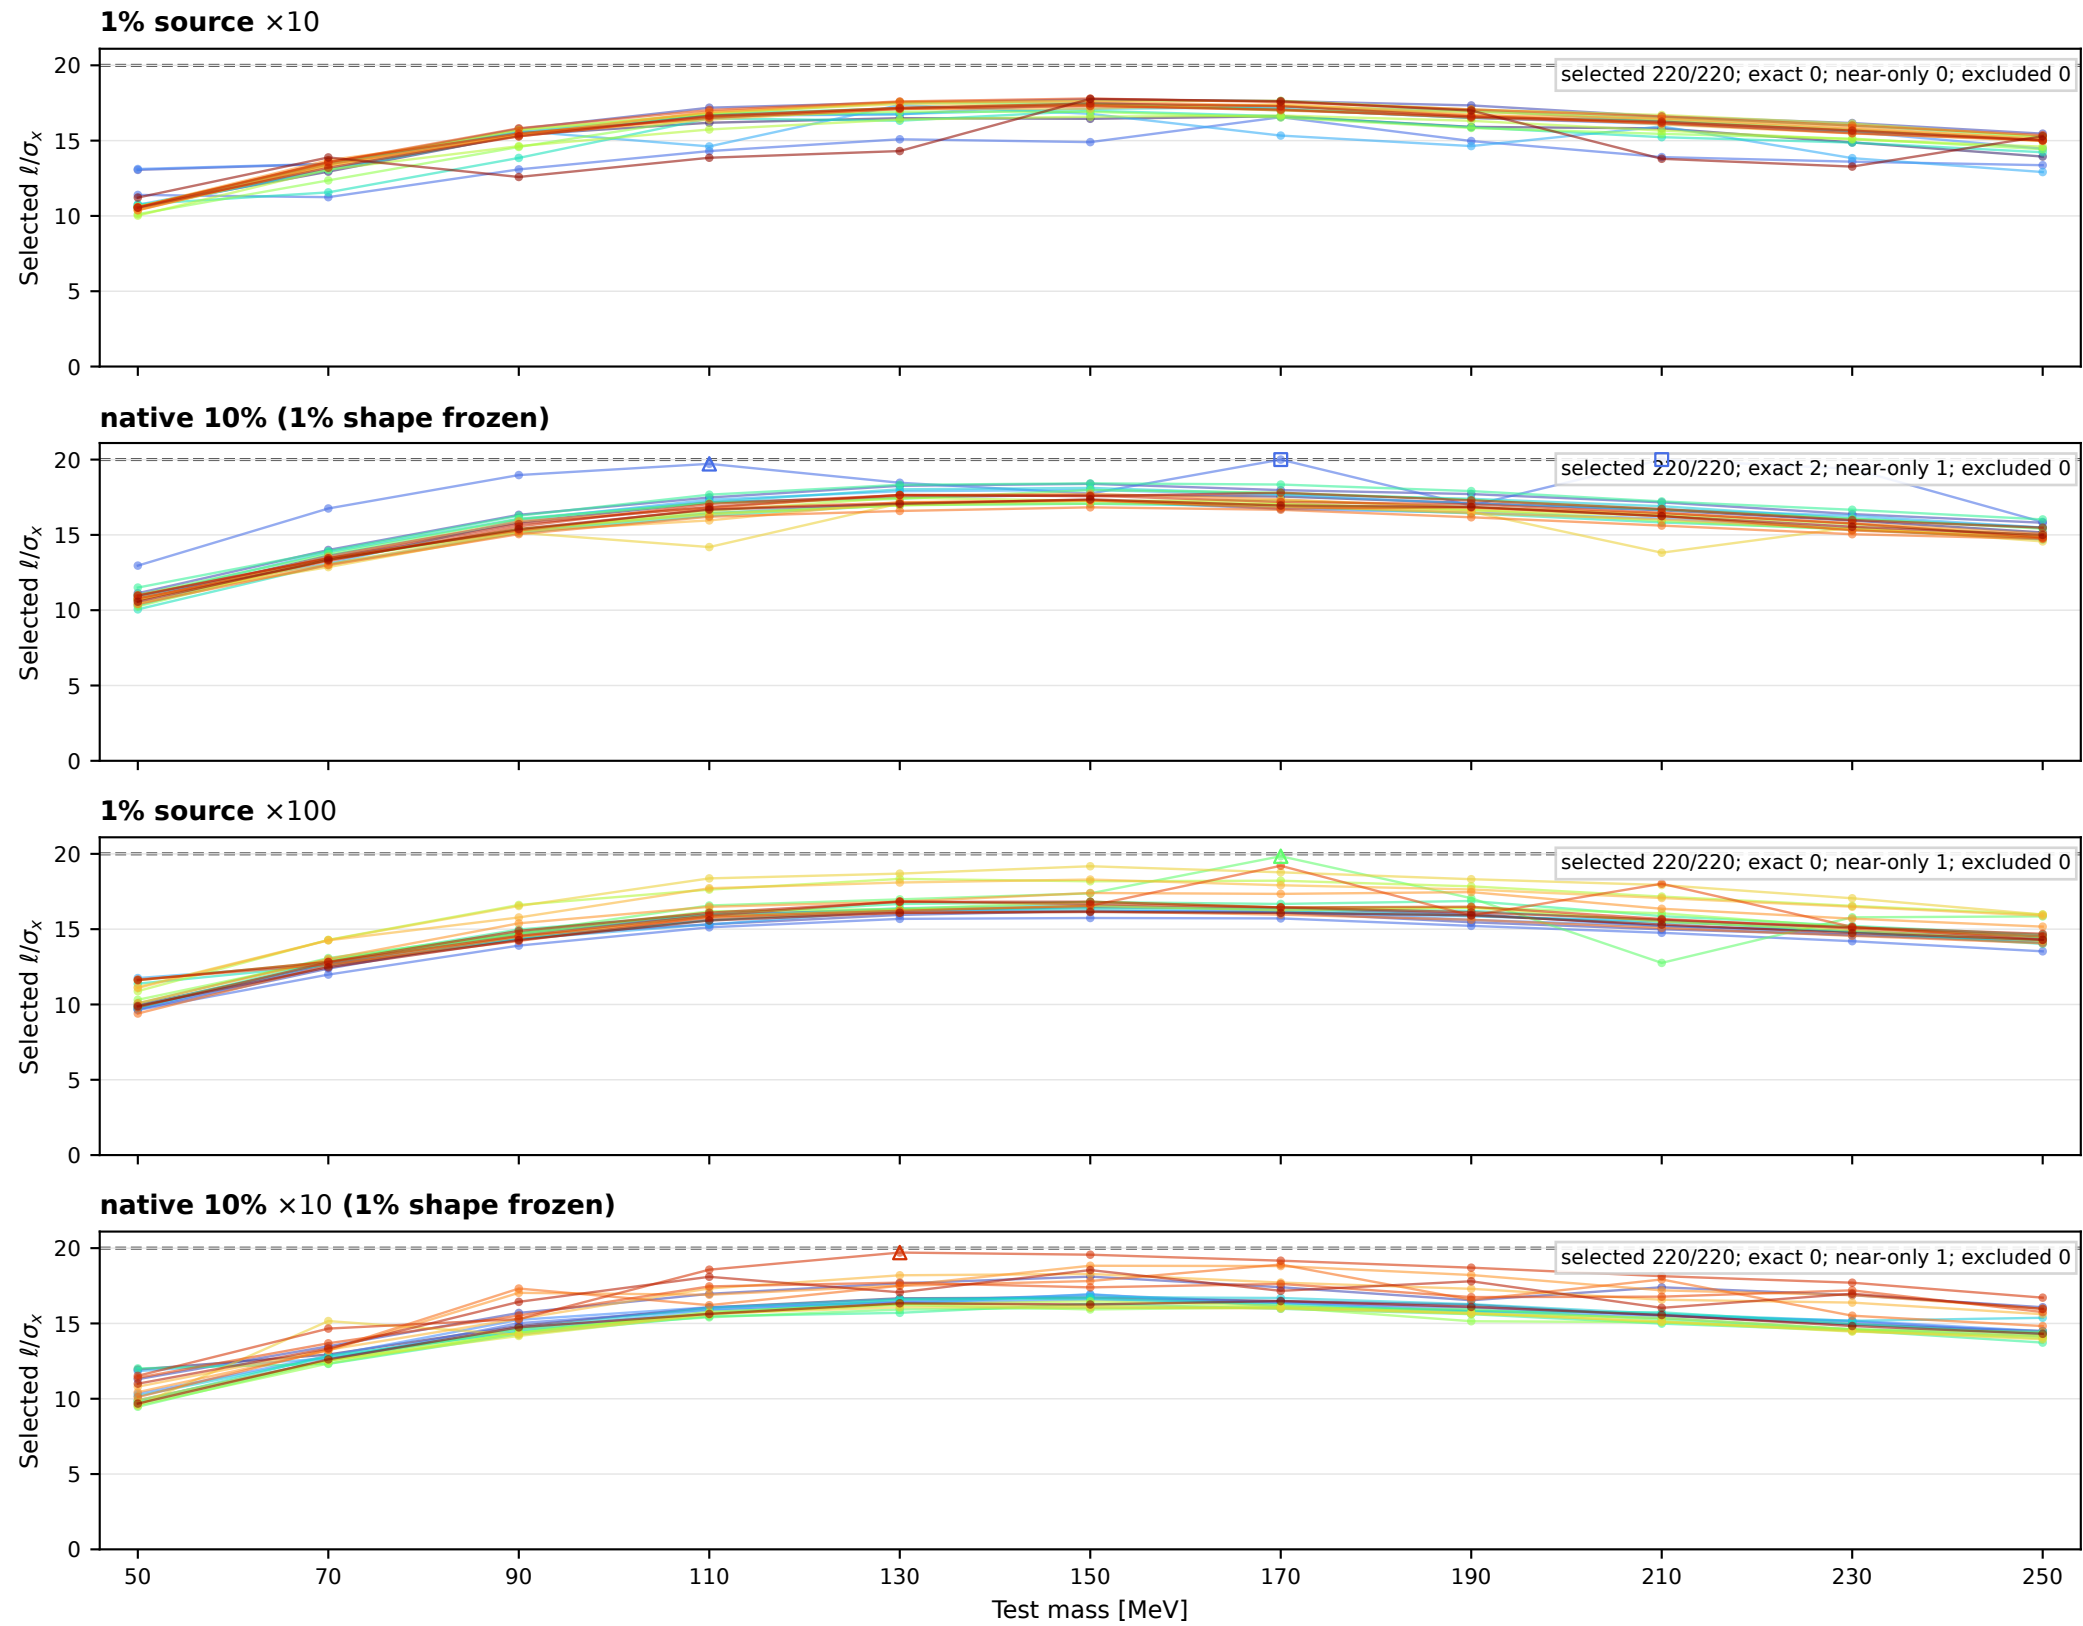

Background-only pull-blind optimizer diagnostic. Gaps denote excluded optimizer states. The tested ceiling is not a factor/card selection.

2021 rigid threshold stress mean: raw selected length trajectories, upper factor 25
 20 background toys per lane; 50:20:250 MeV; reproducible selected branches only

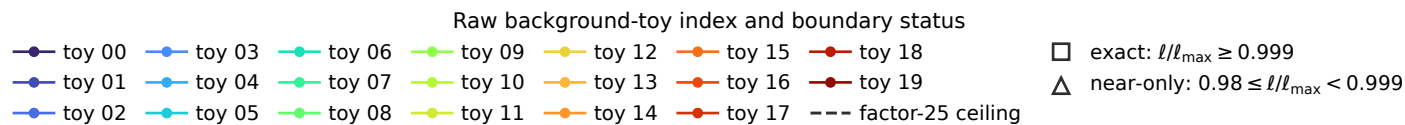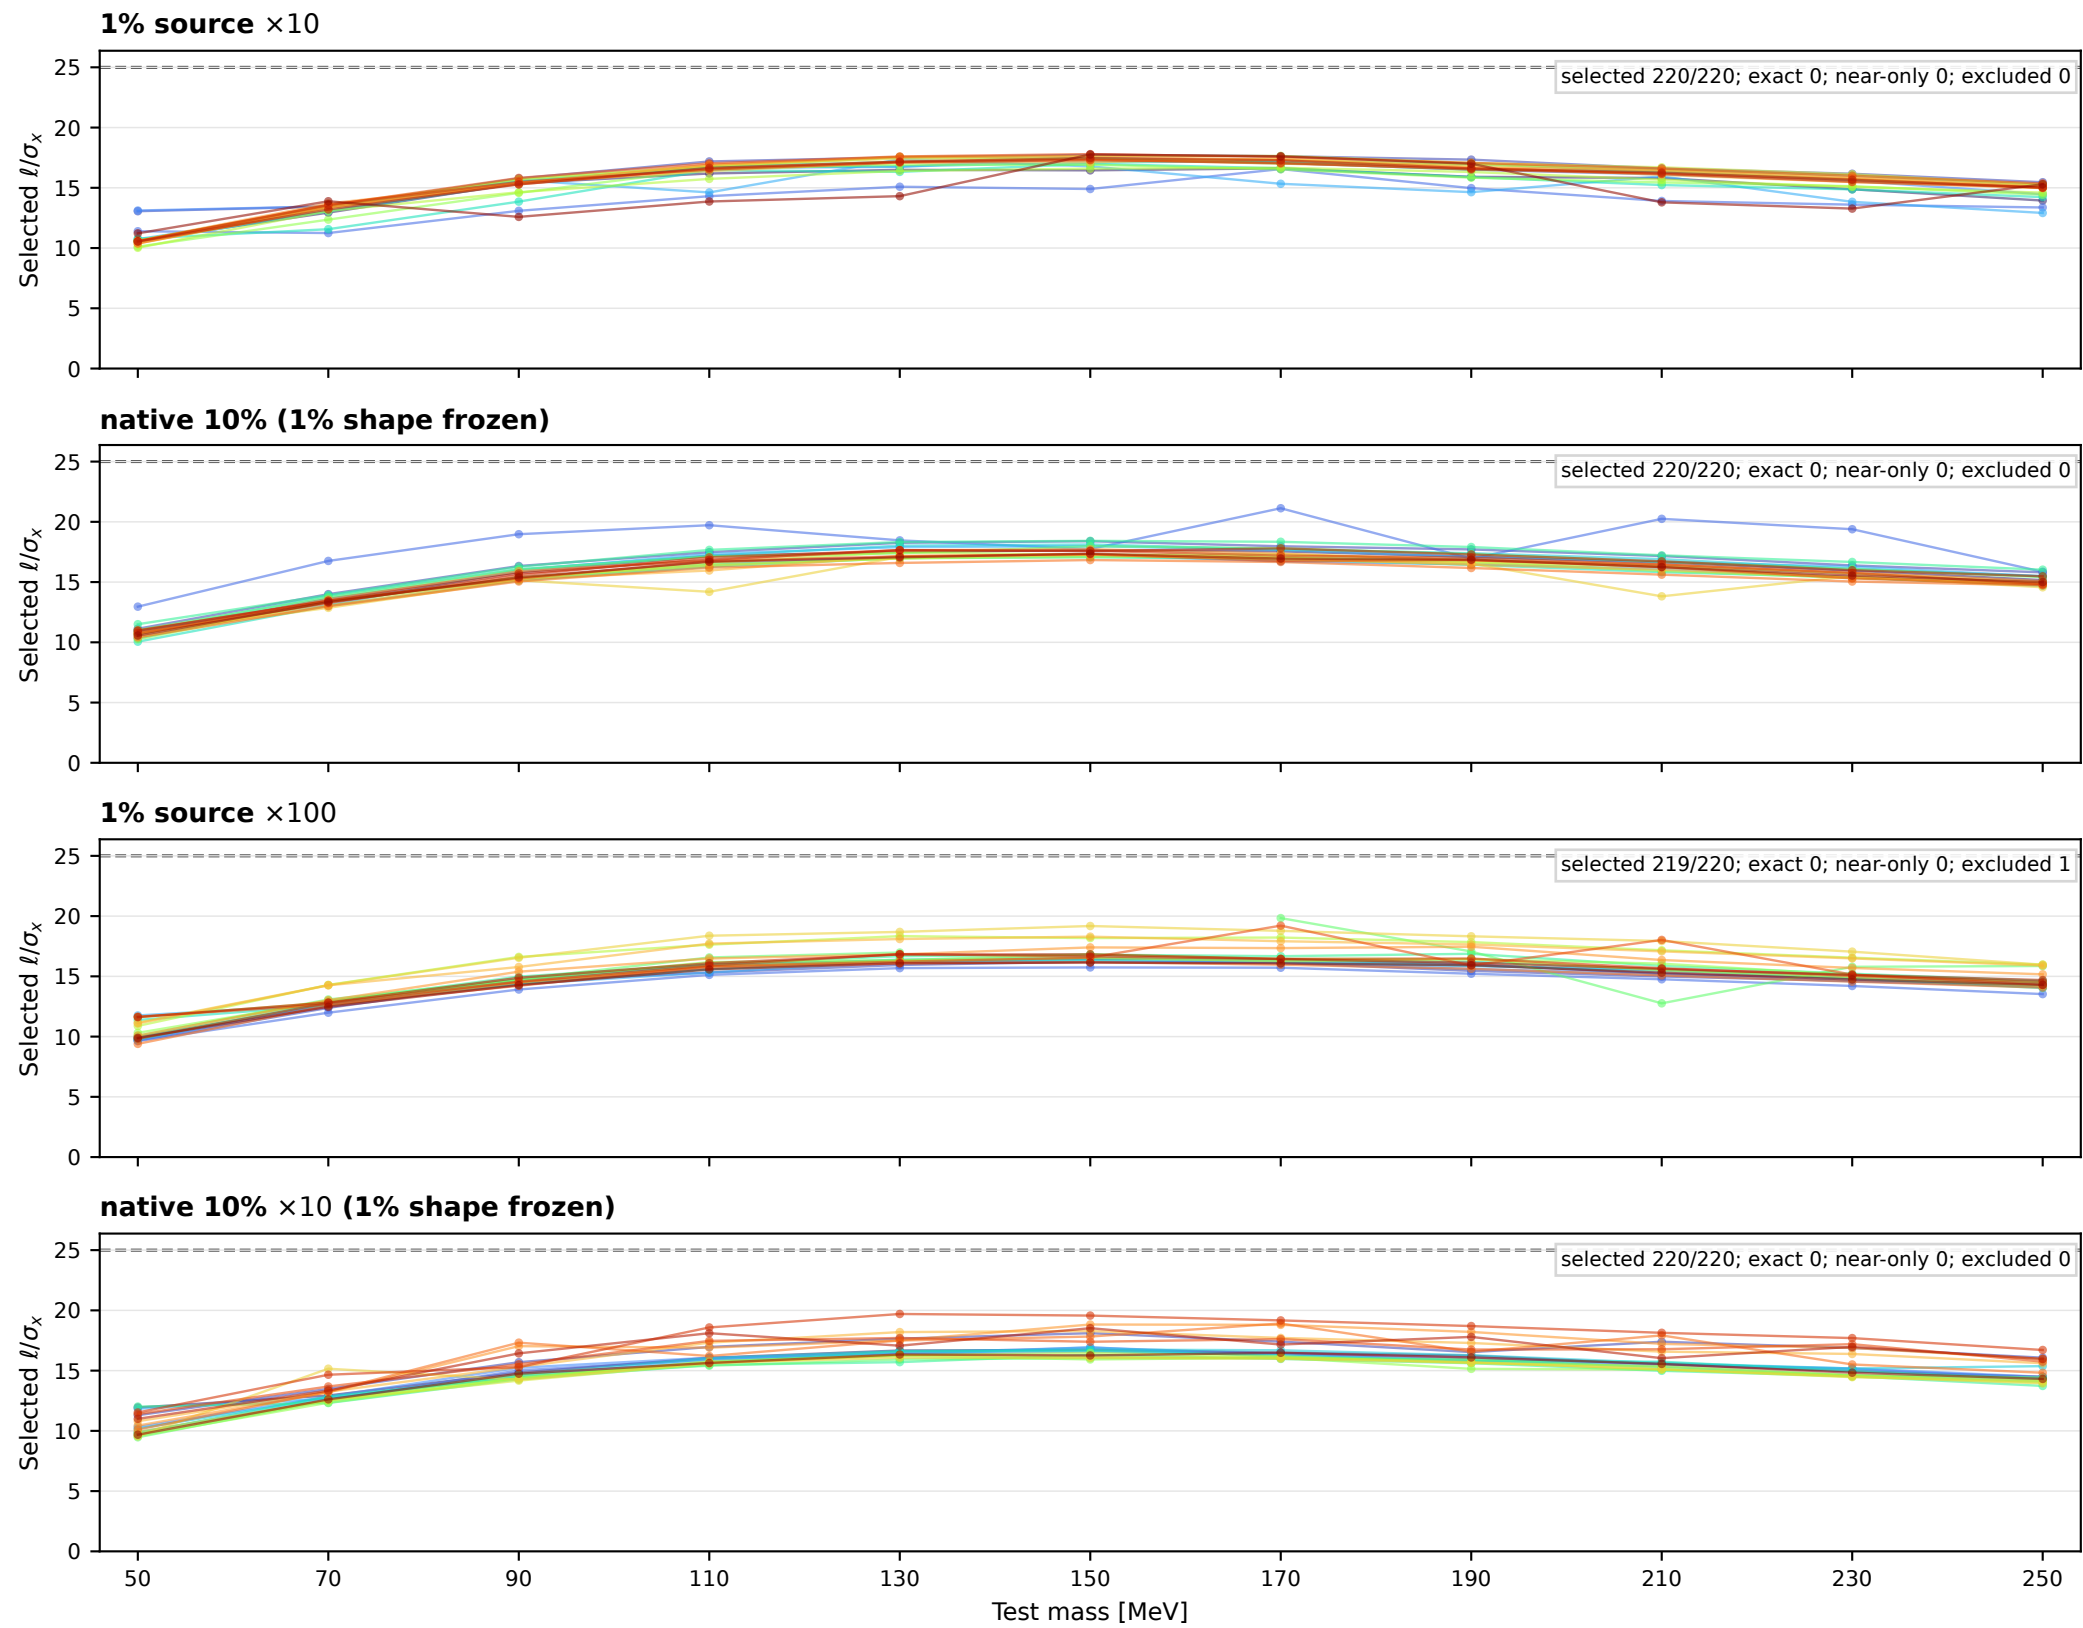

Background-only pull-blind optimizer diagnostic. Gaps denote excluded optimizer states. The tested ceiling is not a factor/card selection.