



PT. SRI INTAN PERKASA



COMPANY PROFILE & CATALOG

PT. SRI INTAN PERKASA



ecatalogue
e-catalog Supp.gd.id

EDISI
JANUARI - JUNI 2023

SITEC

PROTEC
PROTECT YOUR BUSINESS

EST
ELECTRICITY SUPPLY



FUJIFILM

"Q-MED"

PERLOVE MEDICAL



LARGEV



WELCOME TO SRI INTAN PERKASA
COMPANY PROFILE & CATALOG!

CONTENTS

COMPANY PROFILE	01
X-RAY STATIONERY	11
X-RAY MOBILE	13
USG	16
PRINTER & FILM	17
DR & GRIDS	19
RADIOLOGY ACCESSORIES	21
LEAD APRON PA SERIES	22
LEAD APRON PC SERIES	23
DIGITAL IMAGING	24
ACCESSORIES	25
PERLENGKAPAN ICU	31
JASA KONSTRUKSI	32



**WE GLAD TO INTRODUCE COMPANY WE BUILD
THROUGH THE YEARS WITH PROFESSIONALISM**





SRI INTAN PERKASA
COMPANY PROFILE



ABOUT US

Kami perusahaan PT. Sri Intan Perkasa berdiri sejak tahun 1994 di Jakarta, Indonesia. Kami telah menjadi raksasa sebagai penyedia alat kesehatan yang terpercaya dalam memberikan pelayanan, kenyamanan, kemudahan dan kualitas produk terbaik kepada seluruh klien kami.

**PT. SRI INTAN PERKASA MEMPUNYAI
BEBERAPA PRODUK, YAITU:**

Alat Radiologi	Accessories Timbal	Alat Radiologi Stationer	Dental X-Ray		
CT- Scan	IPAL	Ventilator X-Ray	Incinerator	Cairan X-Ray	
Incubator	Uji Kesesuaian	Oxygen	Kalibrasi	CR	DR Film
	Karoseri Bus/Ambulance	Dan Sebagainnya			

KAMI TELAH TERVERIFIKASI OLEH BADAN NASIONAL TERKAIT MUTU PERUSAHAAN SEPERTI:



ISO 45001



ISO 14001



ISO 9001



KAN 17025

DAN VERIFIKASI LAINNYA

MENGEDEPAKAN KOMITMEN KAMI DALAM MEMBERIKAN LAYANAN KEPADA PARA PELANGGAN KAMI.



Better Responsibility

PT. Sri Intan Perkasa adalah perusahaan yang bertanggung jawab dan memiliki komitmen tinggi terhadap tanggung jawab sosial dan lingkungan. Kami mengutamakan praktik bisnis yang berkelanjutan dan beretika, serta berusaha untuk memberikan dampak positif bagi masyarakat dan lingkungan sekitar kami.



Better Service

PT. Sri Intan Perkasa adalah perusahaan yang berdedikasi dalam memberikan layanan unggulan kepada pelanggan. Kami memiliki tim profesional yang berpengalaman dan terlatih dengan baik, siap memberikan solusi yang tepat dan memenuhi kebutuhan pelanggan kami.



Better Partner

PT. Sri Intan Perkasa memiliki kemitraan yang kuat dengan mitra bisnisnya. Kami menjalin hubungan saling percaya dan saling menguntungkan dengan para mitra kami. Kami memahami bahwa keberhasilan kami juga terkait erat dengan kesuksesan mitra bisnis kami.


WHY US?

- Menawarkan harga barang yang terjangkau.
- Memiliki inovasi yang sangat tinggi terhadap produk dan jasa
- Pelayanan yang tinggi terhadap customer jasa dan produk.
- PT. Sri Intan Perkasa dilengkapi Dokumen Nasional penting seperti SIUP, TDP, NPWP, NIB, API, dan IPAK.



WITH US, YOU'LL HAVE THE OPPORTUNITY TO FEEL HOW THE INNOVATION, RESPONSIBILITY AND INTEGRITY BECOME ONE COLLABORATION.

**BY BOSTON SIHOMBING, A.Md.Rad., S.Si.
HEAD OF SIP LAB**

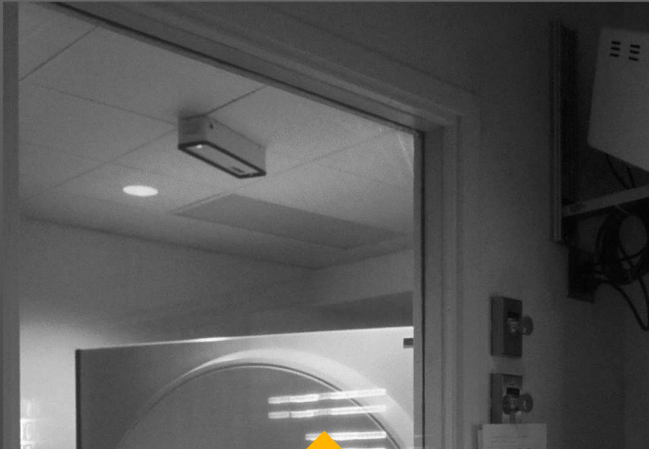

WE DO OUR BEST!



**VISION IS ONE OF OUR MAIN TARGET
TO BE IMPLEMENTED IN OUR COMPANY.**

*JAJANG SUKARMAWIJAYA, S.T
HRD & MR SRI INTAN PERKASA*

VISION



Menjadi perusahaan yang turut ikut aktif dalam melayani masyarakat meningkatkan standaritas personil internal maupun membangun negara.



Memberikan pelayanan, kenyamanan dan kecepatan dalam pelayanan dan kualitas produk terbaik untuk seluruh klien/customer PT. Sri Intan Perkasa.



Menjadi penyedia alat kesehatan yang tersebar dan terlengkap



WE DO OUR BEST!

**MISSION IS ONE OF OUR ACTION TO MAKE
OUR VISION BECOME SUCCESSFUL.**

*IVONI YAPITRO, S.AK
MANAGER OF FINANCE*

MISSION



Menetapkan, Mengimplementasikan dan Mengesahkan mutu yang mencakup seluruh persyaratan dari ISO 9001, ISO 14001, ISO 45001 dan KAN ISO 17025.



Memastikan kesiapan dan persiapan untuk menghadapi setiap



Mengkomunikasikan dan mendukung terhadap pentingnya untuk memenuhi persyaratan di dalam peraturan perundangan, peraturan di bidang mutu maupun persyaratan peraturan di bidang lainnya.



SRI INTAN PERKASA
PRODUCT CATALOG

X-RAY STATIONARY

EST
MedCare

EX5000S - DDR EST MEDCARE DIGITAL MEDICAL DIAGNOSTIC X-RAY SYSTEM

Product Features

- low power only 10,000 watts 1 phase
- inspection operations using One-Touch
- Automatic system for patient table
- X-ray tube and generator made in Germany

Specifications	
High Frequency Generator	Siemens 220VAC, 50W
X-Ray Tube	Siemens 40-100kV 630MA
Collimator	EST
Vertical Bucky Stand	EST
Imageceptor Table	8" 1000
High-density Anti-scatter Grid	201 Fixed 405/100 (0.03/0.000)
Image Acquisition System	EST
System Control Software	EST
HV Cable	EST



SITEC DIGIRAD - FT / FP FASTER AND EASY EXAMINATION WITH SIMPLIFIED SYSTEM


TYPE FLOOR MOUNTED

Product Features

- Fast and Consistent imaging Performance
- Controlling Generator with PC & Console
- Small Packing Size with Easy Installation
- High Durability and Productivity

Specifications Digirad-FT	
Generator	High Frequency generator 50W (Three Phase)
Tube	500 WIG
Table Stand	Assembled with Table
Table	4 way Table
Bucky Stand	Basic Bucky (Option 1000g Bucky)
Collimator	Manual (Option Auto)
12.5 Cable	125 (Option 180)
Grid	201 Line Grid

Specifications Digirad-FP	
Generator	High Frequency generator 400W
Tube	140 WIG
Table Stand	Assembled with Table
Table	4 Way Table
Bucky Stand	Basic Bucky (Option 1000g Bucky)
Collimator	Manual (Option Auto)
HV Cable	125 (Option 180)
Grid	201 Line Grid

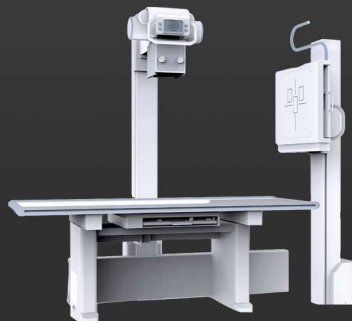

X-RAY STATIONARY

PROTEC
TEAM SPIRIT ABILITY

PRS 500 X PROSLIDE AKL : 21501027457

Product Features

- Space - Saving
- Floating 4-way table top with barrier
- Excellent image quality and short exposure time
- Patient and User friendly
- Digital System with DICOM



Specifications	
Product Specifications	
Table top dimension (standard)	Standard : 2280 mm x 800 mm
Table Stand	Height : 920 Vertical shift 400 - 1385 mm Weight approx. 665 kg
Table Model	X70 Max kVp : 150 kV
Collimator Model	Claymont Optima 30"
Generator Model	Verha : 500 50 kW 1 Phase*

* Optional Upgradeable

PROTEC
TEAM SPIRIT ABILITY

PRS 500 E PROSLIDE AKL : 21501027458

Product Features

- Space - Saving
- New modern design cabinets
- Patient and User friendly
- Accurate exposures along with minimal exposure time
- Digital System with DICOM



Specifications	
Product Specifications	
Table top dimension (standard)	Standard : 2280 mm x 750 mm Optional : 2000 mm x 750 mm
Table Stand	Height : 2190 Vertical shift 355 - 1865 mm Weight approx. 665 kg
Grid entry / Bucky (Optional Upgradeable)	Cassette Size : 18 x 26 cm 43 x 43 cm
Table Model	X70 Max kVp : 150 kV
Collimator Model	Claymont Optima 30"
Generator Model	Verha : 500 50 kW 1 Phase*

* Optional Upgradeable

X-RAY MOBILE

AKL: 21501320765

SITEC
MOBIRAD 50

CAPACITY AND RELIABILITY IN MOBILE IMAGING



Specifications

Generator	
Type	High frequency generator
Power	5W
mA range	0.32-200 mAs
kV range	40-110 kV
mA range	20-100 mA
Exposure times	MAX 5s
Focal spot	1.8mm in large focus 0.5mm in small focus
Target angle	16
Target material	Tungsten
Anode heat storage capacity	KHU (28kJ)
X-ray tube anode	Stationary
Tube head rotation	± 105
Tube column rotation	± 90
Telescopic travel	-

AKL: 21501320764

SITEC
MOBIRAD 400

CAPACITY AND RELIABILITY IN MOBILE IMAGING



Specifications

Generator	
Type	High frequency generator
Power	32kW
mA range	0.5-400 mAs
kV range	40-125 kV
mA range	41-400 mA
Exposure times	MAX 5s
Focal spot	1.3mm in large focus (32kW) 0.6mm in small focus (11kW)
Target angle	13.5
Target material	Tungsten
Anode heat storage capacity	107KHU (80kJ)
X-ray tube anode	Rotating
Tube head rotation	± 165
Tube column rotation	± 260
Telescopic travel	350mm

X-RAY MOBILE



PROSLIDE 32 B

DIGITAL MOBILE X-RAY UNIT

AKL: 21501121865



PROSLIDE 32 SR

**MOBILE X-RAY UNIT
(FOR ANALOG / CR / DR)**

AKL 21501120775



Specifications

Electrical Specifications	
Power Supply	15 - 230VHz 10%
Frequency	50/60 Hz 5 spot
Absorbed Current	10 A
Line Compensation	Automatic
Line Resistance	<1 Ω @ 15/230 VHz
Standard Outlet	16 A @ 230 VHz
Power Supply Cable	2.8 m, retractable
Insulation Class	Class I with applied parts type B
Use Conditions	Continuous working with intermittent load
Classification According to the Liquids Seepage	IP x 0
Safety Presence of Anesthetic	The equipment is not type AP or APG
Environmental Conditions	
Temperature Normal Use	10 °C to 40 °C / -25 °C to 70 °C
Relative Humidity Normal Use	30% to 75% non condensing / 10% to 90%
Pressure Normal Use	700 kPa to 1060 kPa / 500 kPa to 1060 kPa
Total Filtration of the Equipment	
Monobloc	1.4 mm Al @ 75kV
Additional Fixed Filter	0
Collimator	2 mm Al @ 75kV
Total Filtration of Monobloc Group	3.4 mm Al @ 75kV
Additional Filtration of DAP Meter	0.3 mm Al @ 75kV
Total Filtration	3.7 mm Al @ 75kV
Mechanical Specifications	
Width (in transport position)	576 mm
Length (in transport position)	1668 mm / 10200 mm
Height (in transport position)	1885 mm / 1441 mm
Transport handle height	830 mm
Focus-floor distance (2-axis)	444 2153 mm (17.48 84.76 in.)
Max. height	2242 mm
Arm extension (4-axis)	350 mm
Post-raise	710 1010 mm
Lateral range	517 877 / 1246 96 mm
Rotation of the monobloc around the arm axis	180
Rotation of the monobloc around its axis	360 from transport position
Movement	Horizontal speed is proportional to the exerted pressure on the transport handles

Specifications


Electrical Specifications	
Power Supply	15 - 230VHz 10%
Frequency	50/60 Hz 5 spot
Absorbed Current	10 A
Line Compensation	Automatic
Line Resistance	<1 Ω @ 15/230 VHz
Standard Outlet	16 A @ 230 VHz
Power Supply Cable	8 m
Insulation Class	Class I with applied parts type B
Use Conditions	Continuous working with intermittent load
Classification According to the Liquids Seepage	IP x 0
Safety Presence of Anesthetic	The equipment is not type AP or APG
Environmental Conditions	
Temperature Normal Use	10 °C to 40 °C / -25 °C to 70 °C
Relative Humidity Normal Use	30% to 75% non condensing
Pressure Normal Use	700 kPa to 1060 kPa
Total Filtration of the Equipment	
Monobloc	1.1 mm Al @ 75kV
Additional Fixed Filter	0
Collimator	2 mm Al @ 75kV
Total Filtration of Monobloc Group	2.1 mm Al @ 75kV
Additional Filtration of DAP Meter	0.3 mm Al @ 75kV
Total Filtration	2.4 mm Al @ 75kV
Mechanical Specifications	
Width (in transport position)	686 mm (27.38 in.)
Length (in transport position)	1489 mm (58.62 in.)
Height (in transport position)	1604 mm (62.31 in.)
Transport handle height	830 mm (32.68 in.)
Focus-floor distance (2-axis)	444 2153 mm (17.48 84.76 in.)
Max. height	2383 mm (94.21 in.)
Max. height of the front unit leg	94 mm (3.71 in.)
Max. lateral extension of the arm	147 mm (5.81 in.)
Rotation of the arm around the arm axis Y	90
Rotation of the monobloc around the arm axis	180
Rotation of the monobloc around its axis	180 / 102 - 45 with arm in horizontal position
Movement	Vertical with speed and pressure on the handles (if present) and pedal for the obstacles overcoming

X-RAY MOBILE

PERLOVE MEDICAL
AKL: 21501020519

PLX 101C

HIGH FREQUENCY MOBILE X-RAY EQUIPMENT



Product Features

- Lovely appearance, and easy to move and operate
- The technology makes the appearance and operation much more beautiful and convenient.
- System automatically record the radiography parameters when power shut down, ensure no miss

Specifications	
Technical Specifications	
Power Supply	Voltage: 220V ± 22V Frequency: 50Hz ± 1Hz Inner resistance: < 10 ohm
X-ray tube	Anode capacity: 35kV Tube focus: 1.5 mm Anode type: fixed
Collimator	Bright field light beam collimator with 120 W Independent lamp and auto shut-off facility.
Inverter frequency	50 kHz
Tube voltage	40kV-120kV
Tube current	25mA - 100mA
RMA	1.0 - 900 mAs

LARGEV Smart 3D
Multifunctional Dental CBCT AKL: 20601220003



Specifications	
Tube Current (mA)	max 3 (max 10 (RDW))
Tube Voltage (kV)	max 60 (max 100 (RDW))
Fixed Scan Size	0.3 (0.030)
CT Sensor Type	CMOS Flat Panel Detector
Detector Size (cm)	15 x 15
CT Field of View	16 x 9, 14 x 9, 9 x 9
Images (Images)	12.8, 6.4, 3.2
CT Visual Size (cm)	0.25 (0.05-0.1) 0.05
CT Spatial Resolution (lp/cm)	2.0
CT Scanning Time (s)	15
CT Reconstruction Time (s)	15 - 40
Pen Sensor Type	CMOS Flat Panel Detector
Pen Image Size (cm)	203 x 90
Pen Pixel (um)	0.1
Pen Scanning Time (s)	6 - 18
Ceph Sensor Type	CCD 150 Detector
Ceph Imaging Size (cm)	1 (0.6 x 2.0) x 1.68
Ceph Pixel	32
Ceph Scanning Time (s)	7 - 15
Weight (kg)	With Ceph Function: 855 Without Ceph Function: 800
Unit Dimensions (cm)	1970 (D) x 520 (W) x 1610 - 2380 (H)
Packing Size (cm)	With Ceph: 1850 (D) x 520 (W) x 1610 (H) Without Ceph: 1650 (D) x 520 (W) x 1310 (H)
Power	Single: Phase, AC220V / 230V ± 10% 50A 50Hz ± 1Hz

ecatalogue
e-catalogue.hkpg.co.id

USG

DAWEI DW-L5

ECONOMICAL TYPE LAPTOP COLOR
DOPPLER ULTRASOUND SCANNER



General Features

- 15" LED monitor
- Windows 7 Platform
- USB - HDMI
- 165000 Mah Large Capacity
- Display 180 degree angle
- Single probe connector

Choose 2 Probe


- Trans-vaginal Probe
- Convex Probe
- Linear Probe
- Micro-Convex Probe
- Phased Array Probe
- Trans - Rectal Probe

Imaging Features

- Micron Imaging Technology
- Harmony Imaging Technology
- Trapezoid Imaging
- Automatic Spectrum Tracking
- Measurement Technology

Optional Acc

- Thermal Printer
- Puncture Guide Frame
- Gel Warmer
- Printer
- Puncture



DAWEI DW-T6

COLOR DOPPLER ULTRASONIC DIAGNOSTIC SYSTEM



General Features

- 21.5" LED & free arm design
- 19.5" LED Touch Screen
- Windows 10 Platform
- 4 Active transducers ports
- 4G RAM, 120G SSD+ 500G HDD
- 4 Wheels with Locks

Choose 4 Probe

- Convex Probe
- Trans-vaginal Probe
- Linear Probe
- Phased Array Probe
- Micro-convex Probe
- Trans-rectal Probe
- 4D Volume Probe

Imaging Features

- Multi-beam Processing
- Tissue Harmonic Imaging
- Compound Imaging Technology
- Speckle Reduction Imaging
- 4D Technology
- Harmonic Imaging Technology
- Micro Imaging Technology
- Trapezoidal Imaging

ecatalogue
e-catalogue.hkpg.co.id



PRINTER & FILM

FUJIFILM
FCR PRIMA T2
 PROCESSING CAPACITY 73 IPs/HR


Specifications		
Specifications	Standard Components	FCR PRIMA T2 Image Reader (Model: CR-R 392)
	Applicable Console	FCR PRIMA Console, FCRView, CR Console, Console Advance
	Main Connectable Images	DRYPIX PRIMA/Smart/Lite/Plus/4000
	Time Required for IP Feed/Load	Min. 49 sec.
	Processing Capacity	Up to 73 IPs/hr.
	Reading Specification	10 pixels/mm, Spots/mm
	Time to Start on Display	Min. 33 sec.
	Time to Print on DRYPIX IMAGE	Approx. 165 sec in case 35 x 43 cm.
	Number of Stacker	1
	Network	10 Base/T 100 Base TX
	Dimensions (W x D x H)	560 x 540 x 390mm (22"x21"x15")
	Weight	39kg (86lbs)
	Power Supply Conditions	Single phase 50-60Hz AC 100-240V 50N (max)
	Environment Conditions	Operating Conditions: - Temperature: 15 - 30 - Humidity: 15-80%RH (No dew condensation) Atmospheric pressure: 750-1060hPa

Product Features

- High-speed processing
- Space-saving design
- Stable high-quality images
- System Configuration

FUJIFILM
DRY PIX LITE
 FUJI MEDICAL DRY IMAGER


Specifications		
Specifications	Standard Components	Fuji Medical Dry Imager DRYPIX Lite
	Recording method	Thermal head transfer heat while in contact
	Applicable Film	Fuji Medical Dry Film DI-HT 35 x 43, 26 x 36, 25 x 30, 20 x 25
	Film loading	Daylight film loading
	Film magazines	Up to 2 magazines
	Pixel size	84.7 µm (300dpi)
	Recording gradation	12 bits
	Image memory	1 GB
	Density adjustment	Automatic
	Input channels	DICOM network input x 1 channel only

Product Features

- A new concept tabletop dry imager
- Supports multiple film size
- Expandable to two magazines

PRINTER & FILM

FUJIFILM
DRY PIX SMART
 FUJI MEDICAL DRY IMAGER


Specifications		
Specifications	Standard Components	Fuji MEDICAL Dry Layer Imager DRYPIX Smart
	Recording method	Laser exposure thermal development system
	Applicable film	DI - HL (blue base) DI - HL (blue base) 35 x 43 cm (14" x 17") 26 x 36 cm (10" x 14") 25 x 35 cm (10" x 14") 26 x 30 cm (10" x 12") 26 x 36 cm (10" x 14") 20 x 25 cm (8" x 10") 25 x 30 cm (10" x 12") 20 x 25 cm (8" x 10")
	Film loading	Daylight film loading
	Film tray	3 Trays (5 sizes of film are available by changing film trays)
	Processing capacity	Approx. 80 sheets/hour 35 x 43 cm (14" x 17")
	Pixel size	50 µm (508 dpi) 100 µm (254 dpi)
	Recording gradation	14 bits
	Image memory	1GB
	Density adjustment	Automatic
	Input channels	DICOM network input x 1 channel only
	Dimensions (W x D x H)	610 x 630 x 893 mm (24" x 25" x 35")
	Weight	104 kg (229.3 lbs.)
	Power Supply Conditions	Input voltage AC100-240V/ Single phase Frequency 50-60Hz
	Environmental Conditions	Operating Conditions: - Temperature: 15-30 C - Humidity: 40-70%RH (at 15 C) 15-70%RH (at 30 C) (No dew condensation)

Product Features

- Two trays to achieve more versatility
- SAR (Smooth Curve Arranging)
- ECO-DRY System
- Fuji medical dry imaging Film

FUJIFILM
DRY IMAGING
FILM DI-HT


SPESIFIKASI

* DI-HT only for DRYPIX Lite

- .35x43 cm (14x17") : 100 sheets/pack
- .26x36 cm (14x17") : 100 sheets/pack
- .25x30 cm (10x12") : 100 sheets/pack
- .20x25 cm (8x10") : 100 sheets/pack

SPESIFIKASI


* DI-HL for DRYPIX Smart, DRYPIX Lite, DRYPIX EDGE

- .35x43 cm (14x17") : 100 sheets/pack
- .26x36 cm (14x17") : 150 sheets/pack
- .25x30 cm (10x12") : 100 sheets/pack
- .20x25 cm (8x10") : 150 sheets/pack





FLAT PANEL DETECTOR MARS 1717V




Product Features

- Dual band (2.4 and 5 GHz) wireless support.
- Long battery life and smart workflow
- Direct deposition CsI for better image quality with lower dose.
- Stable iSync+ Automatic Exposure Detection (AED)
- 139 µm pixel pitch, with 16 bit ADC for more image details

Specifications	
Technical Specifications	
Detector Technology	Amorphous Silicon
Scintillator	CsI
Active Area (cm ²)	548 x 430
Pixel Matrix	5504 x 3350
Pixel Pitch	100
Spatial Resolution	5.4
AED Dimension (cm)	16
Battery Autonomy (h)	5
WiFi	2.4G and 5G, IEEE802.11 a/b/g/n/ax
Trigger Mode	AED (Optional) / Software
Full Image Time (s)	Typ 3
Dimensions (cm)	384 x 460 x 15
Weight (kg)	5.8
Static Loading	150kg Uniformly
Ingress Protection	IP65
Operating Temperature	5 ~ 35
Storage & Transport Temperature with Package	-20 ~ 55
Operating Humidity	10 ~ 90 (Non-Condensing)
Storage & Transport Humidity with Package	5 ~ 90 (Non-Condensing)




FLAT PANEL DETECTOR MARS 1417V



Product Features

- Dual band (2.4 and 5 GHz) wireless support.
- Long battery life and smart workflow
- Direct deposition CsI for better image quality with lower dose.
- Stable iSync+ Automatic Exposure Detection (AED)
- 150 µm pixel pitch, with 16 bit ADC for more image details

Specifications	
Technical Specifications	
Detector Technology	Amorphous Silicon
Scintillator	CsI
Active Area (cm ²)	437 x 437
Pixel Matrix	3072 x 3072
Pixel Pitch	139
Spatial Resolution	5.8
AED Dimension (cm)	16
Battery Autonomy (h)	5
WiFi	2.4G and 5G, IEEE802.11 a/b/g/n/ax
Trigger Mode	AED (Optional) / Software
Full Image Time (s)	Typ 5
Dimensions (cm)	460 x 460 x 15
Weight (kg)	6.6
Static Loading	150kg Uniformly
Ingress Protection	IP65
Operating Temperature	5 ~ 35
Storage & Transport Temperature with Package	-20 ~ 55
Operating Humidity	10 ~ 90 (Non-Condensing)
Storage & Transport Humidity with Package	5 ~ 90 (Non-Condensing)



PARAMEDIX CDR PRO 1417 / 1717

AKL : 21501220001

SPESIFIKASI

- .OLED DISPLAY FOR USER CONVENIENCE
- .R MODE & 3-BUTTON DESIGN
- .WPCS FOR 24 HR POWER MANAGEMENT
- .INNOVATIVE USB TYPE-C CABLE

SUPERB FLEXIBILITY & PORTABILITY WITH HIGH DURABILITY
WIRELESS DETECTOR WITH INNOVATIVE POWER CHARGING SOLUTION

Q - MED X-RAY GRIDS

AKL : 11501122366


SPESIFIKASI

- .Grid 1000
- .Interspacer al Absorber Pb
- .Size 35 cm x 43 cm line 103
- .Ratio 10:1 F.D.100 cm
- .Cover AL S.N.JW 18639719





LEAD MARKER



AKL : 11503121699

LEAD GLASSES



GONAD OVAL



X-RAY CASSETTES
18-43 AKL : 21501122630



AKL : 11501122065

INTENSIFYING SCREEN



GONAD UNDERWEAR

LEAD APRON **PA SERIES**



AKL : 11503028389

PA 02-50
WEIGHT : 5.4 KG



AKL : 11503028389

PA 05-50
WEIGHT : 5.4 KG



PA 01-50
WEIGHT : 5.4 KG



AKL : 11503028389

PA 04-50
WEIGHT : 5.4 KG



AKL : 11503028389

PA 07-50
WEIGHT : 5.4 KG



AKL : 11503028389

PA 03-50
WEIGHT : 5.4 KG



AKL : 11503028389

PA 06-50
WEIGHT : 5.4 KG

LEAD APRON PC SERIES

LEAD APRON **PC SERIES**

AKL : 11503027763

PC NO.04

WEIGHT : 5.85 KG



AKL : 11503027763

PC NO.05

WEIGHT : 5.85 KG



AKL : 11503027763

PC NO.06

WEIGHT : 5.85 KG



AKL : 11503027763

PC NO.07

WEIGHT : 5.85 KG



SOFTWARE PACS



PROPAXX DIGITAL IMAGING



Specifications	
Supported languages	English, German, French, Czech, Hungarian, Spanish, Polish, Turkish, Chinese, Italian, Slovenian, Lithuanian
Interfaces	DICOM Media Storage DICOM WADO (SCU) DICOM Print Management (SCU) DICOM Query/Retrieve (SCU) DICOM Storage (SCU) DICOM Storage Commitment (SCU) DICOM Verification DICOM Worklist (SCU) GDV/BDI
DICOM Conformance	Standard I/O
Special Features	Intuitive user interface, intelligent automatic backup function, intelligent database purging function, automatic image optimization (also adjustable for each body part) program in window or full screen mode, varying filter levels selectable

Product Features

- Detailed 10-Bit display of the X-ray images
- Configurable menu with guide access
- Scalable functionality
- Individual system size up to multiple workstations
- Integrated backup function



CONAXX 2 DIGITAL IMAGING



Specifications	
Supported languages	English, German, French, Czech, Hungarian, Spanish, Polish, Turkish, Chinese, Italian, Slovenian, Lithuanian
Interfaces	DICOM Image (SCP and SCU) DICOM Storage Commitment (SCP) DICOM Query/Retrieve (SCU) DICOM Worklist (SCP) DICOM Print (SCU) DICOM CD GDV/BDI
DICOM Conformance	Standard I/O
Special Features	Interactive Histogram, Measurement functions Full screen viewing of all image Filtering, Patient CD, E-mail sending Diagnostic tooling, Resampling Work overlay, Crop function Creation of R-Images, Ruler / Grid Region Windowing, Lock-up-tables Demotographs, Multi Monitor, Sync mode
Basic Features	Image Import/Export Patient Administration Inversion, Rotate/Window Magnifier / zoom / zoom visualization Image comments, DICOM header view Multi level windowing function Panning, Annotations Light box, GDV/BDI/VRH interface

Product Features

- Automatic image optimization
- Three clicks only to get your X-ray image
- Image diagnose possible directly in CONAXX 2
- User friendly breathing circuit holder
- Extraordinary efficiency saves time and money



MANUAL ID NAME PRINTER

Suket: FR.03.02/VA/02720/2021

SPESIFIKASI


.Material: Plane Iron
.Lighting: Lamp 6 VDC, 220 Volt/50Hz
.Window: 7,5 x 2,5 cm
.Density Adjuster
.Push On Switch Led
.Dimension: Approx. 25 x 20 x 6 cm
.Weight: 1 kg (nett)
.Color: Dark Blue
.Finishing: Spray Paint

DARK ROOM VENTILATOR

Suket: FR.03.02/VA/01640/2021

SPESIFIKASI

.Dimension (LxWxH): Approx. 45 x 35 x 85 cm
.Right/Left Trim: 30 mm
.Top/Bottom Trim: 30 mm
.Power Requirement: 31 Watt, 220 Volt/50 Hz +/-10%
.Ventilator For Exhaust Fan: 350 x 350 mm
.Ventilator: 350 x 100 mm
.Color: Dark Blue
.Finishing: Spray Paint



DARK ROOM SAFEFLIGHT

Suket: FR.03.02/VA/01791/2021

SPESIFIKASI

.Dimension: Approx. 18 x 15 x 12 cm
.Equipped with safety filter
.Power Requirement: 15 Watt, 220 Volt/50Hz
.Dimmer
.Color: Dark Blue
.Finishing: Spray Paint



MANUAL PROCESSING TANK STAINLESS STEEL

Suket: FR.03.02/VA/01627/2021

MANUAL PROCESSING TANK FIBER

Suket: FR.03.02/VA/01861/2021

SPESIFIKASI

.Material:
a. Stainless Steel. Rust and Leak Proof
b. Fiber: Leak Proof, dark blue color
.Capacity: 20 liters

.For the use of X-Ray Films from 18 x 24 cm - 35 x 43 cm

.Equipped with lid to decrease the oxidation

.Ventilator For Exhaust Fan: 350 x 350 mm

.Dimension:

- Tank : Approx. (L x X x H): 38 x 11 x 52cm

- Lid : Approx. (L x W x H): 42 x 15 x 2cm



X-RAY PROTECTIVE SCREEN

AKD 11503122062
AKD 11503121919

SPESIFIKASI

- SINGLE
- 1 WING
- 2 WING
- Made of Plywood (2 x 12-15 mm)
- Covered with 2 - 4 mm Pb
- Equipped with:
- Castor, Diameter: 4inch
- Lead Glass
- 20 cm x 30 cm x 15 mmPb
- Installed 1.5 m from floor
- to glass trim
- Dimension (L x H W cm):
- Approx.(122 x 200) x 4cm (single)
- Approx.(61 + 122) x 200 x 4 cm (1 wings)
- Approx.(61+122+61)x200x4cm (2wings)
- Color: White
- inishing: Spray Paint

e catalogue
e-katalog.hippogrid

X-RAY FILM STORAGE BOX

SUKET: FR.03.02/VA/01639/2021

SPESIFIKASI

- . Material: Plywood, Thickness : 12 mm
- . Stainless steel Door Handle
- . Dimension (L x W x H): Approx.70 x 45 x 80 cm
- . Acrylic Film Shelves, for the use of film size 18 x 24 cm - 35 x 43 cm
- . All Cabinets inside Covered with Melamine 3 mm
- . All Cabinets Outside Covered with Teakwood 3 mm
- . Color: Wood Color
- . Finishing: Spray Polytur Paint Coating With Clear Gloss



e catalogue
e-katalog.hippogrid



X-RAY CASSETTE TRANSFER BOX

SUKET: FR.03.02/VA/01125/2021

SPESIFIKASI

- . Material: M.S.Sheet, Thickness: 1.2 mm
- . Stainless Steel Door Handle
- . Dimension (L x W x H): Approx.56 x 53 x 48 cm
- . Front Frame Dimensions: Approx.61 x 58 x 2.5 cm
- . Two Side Doors With Crossing Lock System
- . Equipped with safety slots
- . Weight: 40 kg (nett)
- . Color: Silver
- . Finishing: Spray Paint

PARAMED X-RAY CASSETTE STAND HOLDER

AKD 11501121928

SPESIFIKASI

- . Made of Steel Rustl Stainless Steel Rail | and Equipped with Footing base
- . Easy to Raise or Lower The Cassette
- . For The Use of Cassette from 18 x 24 cm up to 35 x 43 cm
- . Practical Knock-down System
- . Cassette Stand Holder can be adjusted up to 30 cm above base plate
- . Dimension: Approx.170 x 75 x 50 cm
- . Weight: 10 kg (nett)
- . Color: Silver
- . Finishing: Spray Paint

e catalogue
e-katalog.hippogrid



VERTICAL BUCKY STAND


Product Features
AKD 11501220002

- Compact figuration, good structure.
- Using hand-ring bolt to fix.
- Short distance between film.
- Korea made ray filtration grid bring a perfect articulation and contras.

Specifications	
Parameters :	
Height Movement Range	1768mm
(Up & Down)	470mm - 1468mm
Grid Ratio	103R/Inch
Focus Distance	101
Built-in Grid Size	1500mm
Biggest Film Size	17" 17inch

RADIOLOGY TABLE

AKD 21501220026

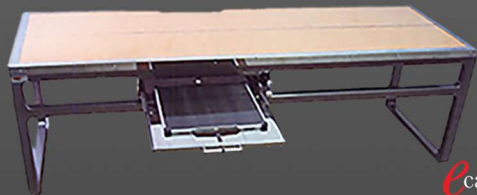

catalogue
e-katalog.hipp.go.id

SPESIFIKASI

- . Material: M.S Square Pipe, Thickness: 50 x 50 x 2 mm
- . Dimension (L x W x H): Approx. 200x70 x 70 cm
- . Table top covered with acrylic 5mm & Stainless steel frame
- . Stainless steel bucky table: cassette size 18 x 24 - 35 x 43
- . Weight: Silverstone
- . Finishing: Spray Paint

X-RAY FILM DRYER

SPESIFIKASI

- . Material: M.S. Sheet, Thickness: 1.2 mm
- . Dimension (L x W x H): Approx. 80 x 57 x 70 cm
- . Rack Capacity: 25 Hangers
- . Weight: 40 kg (nett)
- . Power Requirement: 1100 Watt, 220 VAC, 50Hz +/- 10%
- . Heater Indicator
- . Timer Sec/Min/hour
- . Thermostat 50°C - 300°C
- . Thermometer 0°C - 300°C
- . Blower 8" 30 W, 50 Hz
- . Color: Dark Blue
- . Finishing: Spray Paint




THERMOLUMINESCENT DOSIMETER (TLD) BARC

Specifications

Dimensi kartu TLD	52,5 mm x 30 mm x 1,0 mm
Dimensi disk TLD	13,5 mm diameter
Open window	Diameter : 14,0 mm
Filter Cu	30 mm x 16 mm x 1 mm
Filter Al	Diameter 15,6 mm, ketebalan 1,0 mm
Filter plastik	30,5 mm x 21 mm x 1,6 mm
Puncak utama (glow curve)	230°
Fading	di bawah 5 %

AUTOMATIC X-RAY FILM VIEWER

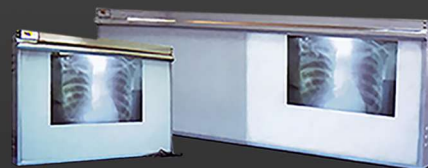


SINGLE

DOUBLE

SPESIFIKASI

- . Material: M.S. Sheet, With Aluminum Housing & Stainless steel frame
- . Lighting: Neon Light (32W (Single)/ 64W(Double), 220 Volt)
- . Type: Single Beam & Double Beams
- . Color: Silver
- . Finishing: Spray Paint

* The light automatically on when film inserted



TRUSKAN S500

SKANRAY MULTIPARAMETER PATIENT MONITOR


AKD: 20502220269

Product Features

- 6 channel monitor with 10.4" TFT colour display
- Advanced features like SatSeconds™, LoSat™ & IPI™
- Support for HL7 based interfacing with HIS
- Vital Trends & storage of 168 hours
- Comprehensive monitoring: ECG, Respiration, etc.

JASA

PARAMED JASA PROTEKSI RADIASI

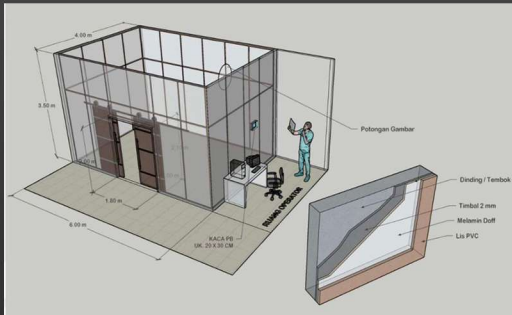

Spesifikasi :

- Timbal / Timah Hitam 2 milimeter
- Kaca Pb ukuran 20 x 30 cm
- Finishing Body dengan Melamine Doff
- Finishing List dengan PVC
- Testing Paparan Radiasi

KONTRUKSI RADIOLOGY RUMAH SAKIT



Merupakan sistem konstruksi ruangan operasi terintegrasi yang memberikan kombinasi terbaik atas kualitas, estetika, kehandalan dan fleksibilitas dalam menciptakan ruang operasi yang memenuhi standar yang disyaratkan serta mampu meningkatkan efektifitas dan kualitas tindakan

PARAMED MOT Modular Operating Theatre

- Laminar Aiflow / Plenum
- Ceiling dan Wall Panel
- Vinyl Flooring
- Room Doors
- Climate Control
- Operating Room
- Room Pendant
- Surgical Table



GAPKAINDO

Garda Pengusaha
Konstruksi Air Indonesia

5596/DPN-GAP/KTA/10/VII/2022



**THANK YOU FOR CHECK OUR
CATALOG. WE ARE WAITING FOR YOU.**

***PLEASE FEEL FREE
TO CONTACT US!***



First Office : Ruko Grand Cemara Blok U6/12
Harapan Indah - Bekasi Barat



Phone : (021) 887 3435 / (021) 887 3691



Email : marketingsip@srintanperkasa.com



Second Office : Ruko Harapan Indah Blok
EN/7 & 8 - Harapan Indah - Bekasi Barat



Phone : (021) 8898 4397



Email : trading.srintanperkasa@gmail.com