

The diagram shows the SIM800C module with the following connections:

- V\_BATT (2V8)** connected to pins 18 (SIM\_VCC), 15 (SIM\_IO), 16 (SIM\_CLK), 17 (SIM\_RST), 24 (VBUS), 42 (STATUS), 41 (NETLIGHT), 11 (SPK\_P), and 12 (SPK\_N).
- V\_BATT** connected to the anode of LED-B (D4) through a 1K resistor (R10). The cathode of D4 is connected to GND.
- TP1 TestPoint** connected to pin 41 (NETLIGHT).
- PWRKEY** (pin 39) connected to a push button (R13) which is also connected to GND.
- UART\_TX (pin 1)** and **UART\_RX (pin 2)** connected to a 2V8 source.
- Other pins connected to GND:** 6 (UART1\_DTR), 7 (UART1\_RI), 8 (VDD\_EXT), 9 (UART1\_CTS), 10 (UART1\_RTS), 22 (UART2\_TXD), 23 (UART2\_RXD), 38 (ADC), 9 (MICP), 10 (MICN).
- Other pins:** 28 (VRTC), 34 (VBATT), 35 (GSM\_ANT), 36 (BT\_ANT), 37 (RF\_SYNC), 52 (MAIN\_ANT), 20 (BT\_ANT), 29 (RF\_SYNC), 19 (BT\_ANT), 28 (VRTC), 34 (VBATT), 35 (GSM\_ANT), 36 (BT\_ANT), 37 (RF\_SYNC), 52 (MAIN\_ANT).

**MAIN\_ANT**

J5 DNP 2 U.F.L.

GND

**Test point**  
Place close to the chip

C6 DNP DNP

GND

R12 0R

C9 DNP DNP

GND

D6 TVS

GND


**LXES19AA1-153**

1 2

J4 U.F.L.

GND

| Version | Y_in | ADC voltage | R_bottom | R_bottom | Standard |
|---------|------|-------------|----------|----------|----------|
| 0       | 3.3  | 0           | 40200    | #DIV0!   | DNP      |
| 1       | 3.3  | 0.35        | 40200    | 338829   | 340K     |
| 2       | 3.3  | 0.7         | 40200    | 149314   | 150K     |
| 3       | 3.3  | 1.05        | 40200    | 86143    | 86.6K    |
| 4       | 3.3  | 1.4         | 40200    | 54557    | 54.9K    |
| 5       | 3.3  | 1.75        | 40200    | 35695    | 35.7K    |
| 6       | 2.3  | 2.1         | 40200    | 22971    | 22.8K    |
| 7       | 3.3  | 2.45        | 40200    | 13947    | 14K      |
| 8       | 3.3  | 2.8         | 40200    | 7179     | 7.15K    |
| 9       | 3.3  | 3.15        | 40200    | 1914     | 1.91K    |

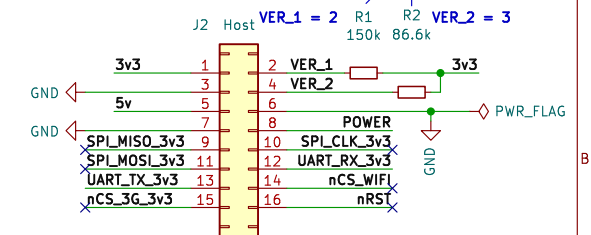

Keyed female sockets are very uncommon.

[illegible][illegible]

P-1000010 Bare PCB

KiCad E.D.A. 9.0.4