

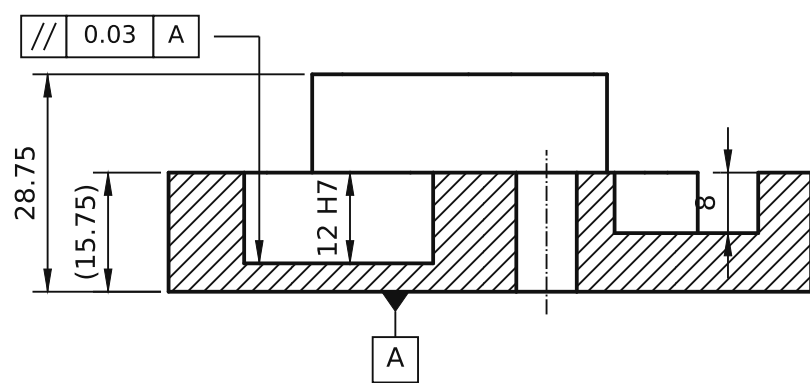


SECTION A-A

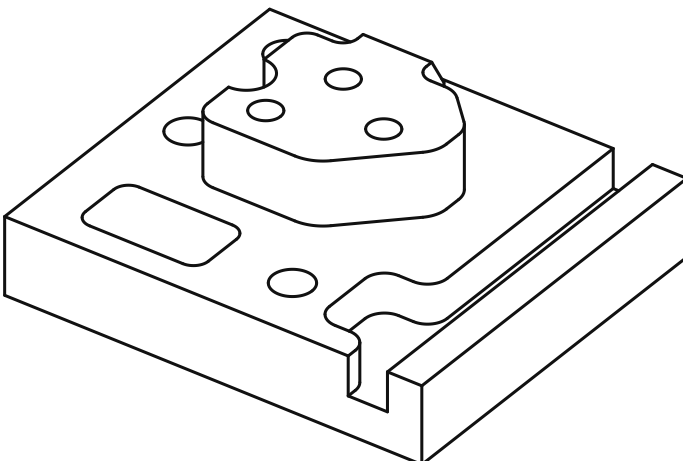

SECTION B-B

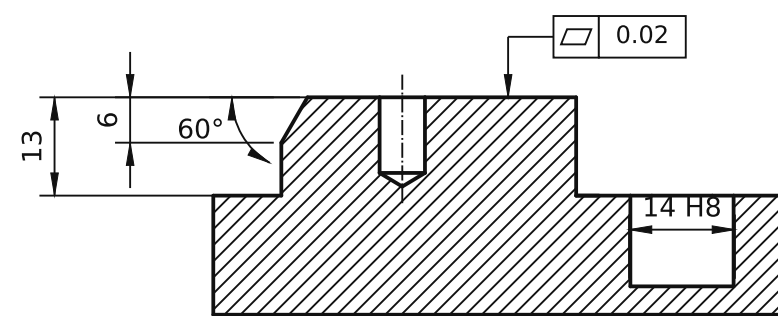


ISOMETRIC VIEW (scale 1:1.25)

COORDINATES (datum B = X0, datum C = Y0)

Point	X	Y	R / Ø
A	19	27	R4
B	43	27	R8
C	58	42	R6
D	58	50	R5
E	50	58	R5
F	42	58	R3
G	42	66	-
H	28	66	-
I	28	58	R3
J	19	58	R3
K	19	47	-
L	19	37	-
M	19	42	R5 notch
1	28	35	Ø6 blind
2	47	42	Ø6 blind
3	33	50	Ø6 blind
P	10	6	pocket corner

NOTES

- Dimensions in mm. Part machined in one clamping from 85 x 75 x 30 stock; top face milled 1.25 mm. Datum A = base, B = left face, C = front face.
- General tolerances ISO 2768-mK. Fits per UNE-EN ISO 286-1/-2:
25 H8 = 25 +0.033/0 14 H8 = 14 +0.027/0 12 H7 = 12 +0.018/0
- Geometric tolerances per UNE-EN ISO 1101:2017. Boxed dimensions are TED.
- Island points A-L: theoretical corners; arcs tangent, radius per table.
Concave R5 notch centred on M. Chamfer on edge G-H: 6 deep, 60° to XY.
- Holes drilled with 118° point drills. Blind hole depth = cylindrical part.
- Side recess open on front and back faces, depth 8, corners R4.
- Blind holes 1-3 and pocket corner P located per coordinate table.

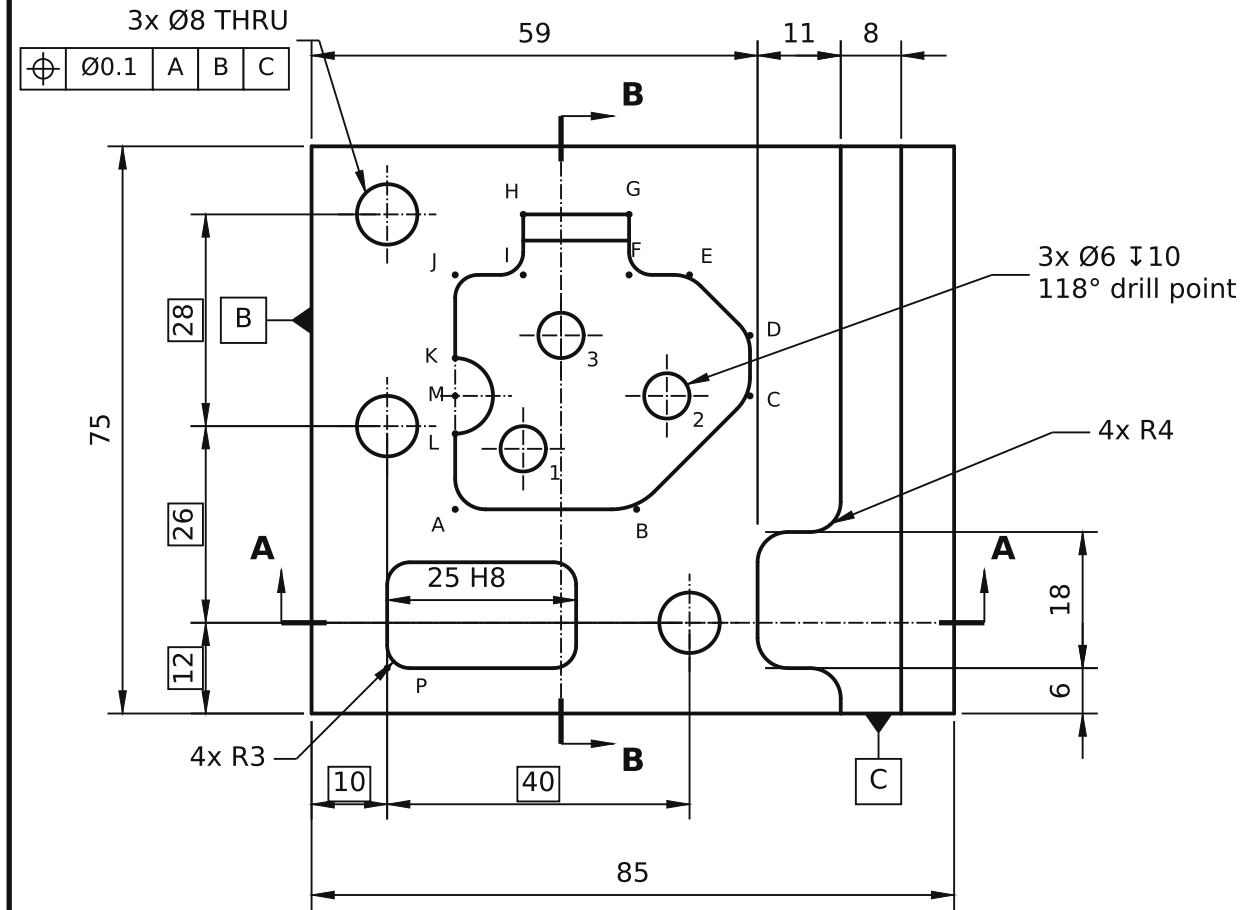

DESIGN OF A PART FOR MANUFACTURING ON A MILLING MACHINE

Computer Aided Manufacturing Workshop: Coursework 1 (DES)

Drawn J. van den Ouden	Date 2026-10-01	Scale 1:1	Sheet A3 1/1
Standards ISO 129-1, ISO 1101	Tolerances ISO 286, ISO 2768-mK	Stock 85 x 75 x 30	Projection