

ESB-R10 BIOMASS GASIFIER

10kW/12.5kVA BIOMASS
GASIFIER




TURNING WASTE INTO WATTS

FROM FIELD TO FUEL

ENERSOL BIOPOWER PVT. LTD.

Established in 2013 by Mr. Rai Singh Dahiya, a grassroots innovator in biomass gasification technology, our company is renowned for its compact biomass gasifiers, smokeless biomass stoves, RDF gasifiers, biochar pyrolysis plants and other renewable energy solutions.




ESB-R10 BIOMASS GASIFIER DESIGN


The ESB-R10 10kW biomass gasifier is ideal for research institutes and catering to small-scale electricity requirements. Featuring patented technology, the ESB-R10 biomass gasifier is designed to be compact, user-friendly, and low maintenance, making it a convenient solution for various applications.



- Simple design.
- Low tar contents as most of the tar is burnt in combustion zone.
- Best option for usage in gas engines.
- At lower loads, fewer particles in the gas.

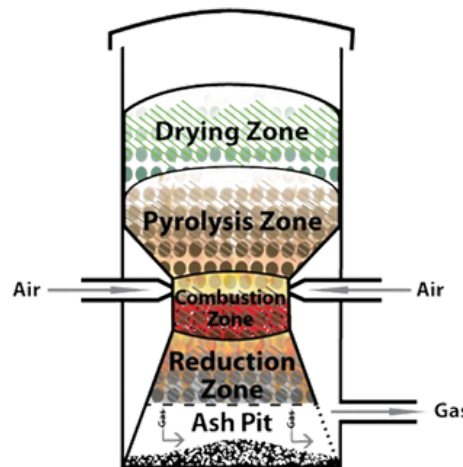

BASIC STEPS INVOLVED

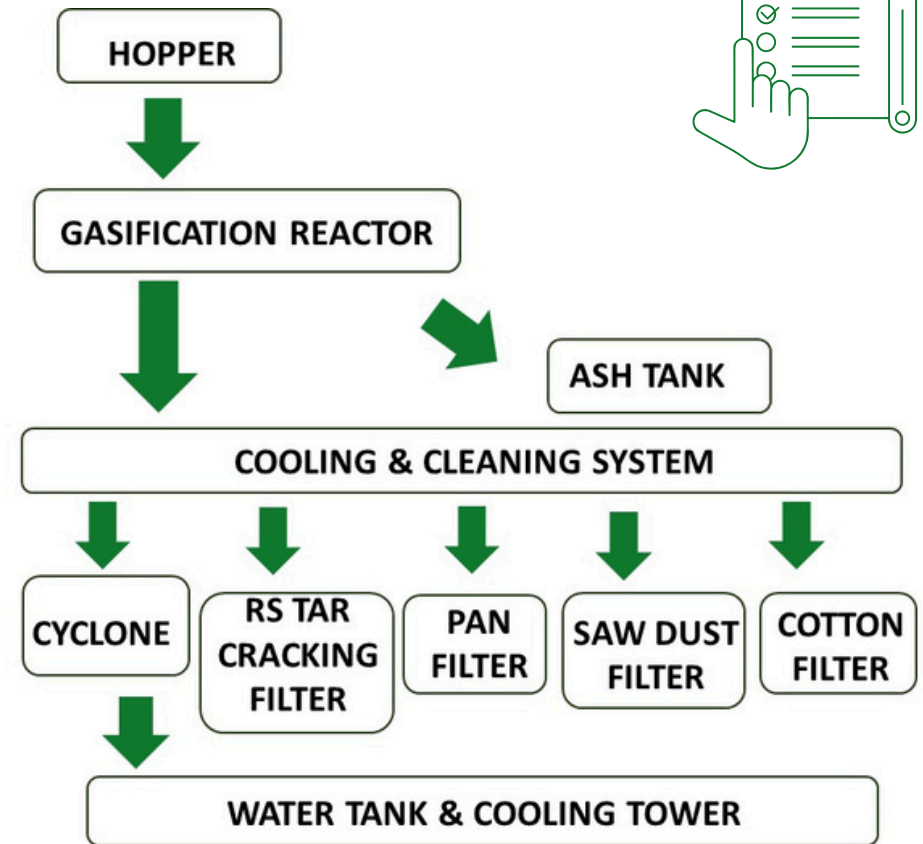

KEY FEATURES OF ESB-R10

ESB-R10 10kW biomass gasifier has some unique features which makes it advantageous than other available models in the market. Some of them are listed below:

1

Most suitable for villagers due to the abundance of agro-waste available, which can be utilized to generate their own electricity using this gasifier. As it's a portable unit, villagers can employ it for multiple purposes; for instance, during the day for irrigating farms and at night for electrifying their houses.

2

Smallest, portable, and soundproof gasifier system.

3

Ideal for villagers with ample agro-waste for electricity generation.

4

Maximum atomization with automatic initial firing.

5

Utilizes dry filtration, eliminating the need for water and costly purification plants.

6


Reliable, rugged, and compact design and costly purification plants.

7

Low maintenance and easy operation.

8

Accessible to both urban and rural communities.



**Most reliable
& rugged
system**



**Compact
system**



**Accepts all
kind of biomass**



BASIC PARAMETERS

1

ESB-R Biomass Gasifier can operate at any type of agricultural or forest waste residues with limited moisture in feedstock. To know more about acceptable feedstock, kindly refer the "ESB-R Biomass Gasifier Catalogue" enclosed with this quotation.

2


The gasifier works with producer gas which is basically manufactured 'ON-LINE'.

3

Clean all the filters and do the required maintenance on time for better performance of gasifier.

4


Since Gasifier being a new technology equipment, we advise clients to get properly acquainted with all operational aspects & optional items of Gasifier like biomass characteristic (recommended moisture level, its bulk density, size etc.) as well as suitability of optional items like wood dryer, wood cutter etc. and any other associated accessories.

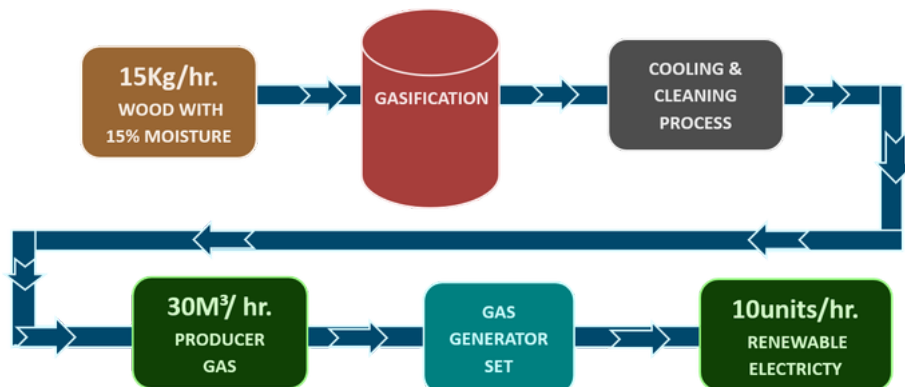

PATENTED RS FILTER

**EFFICIENT
TAR
CRACKING**

**SELF-
GENERATED
WATER FOR
CLEANING**

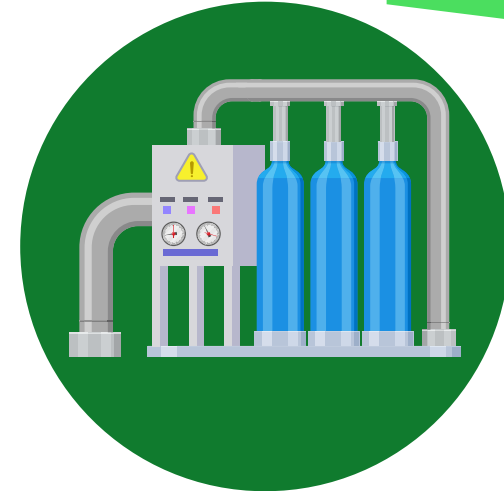

**EXTENDED
FILTER
LIFESPAN**

**CO2
EMISSION
REDUCTION**

TECHNICAL SPECIFICATIONS

Model Name
ESB-R BIO-10

Model No.
ESB-R10

Auxiliary Power
2.5HP

Weight
1 Ton

**Dimension
(Gasifier)**
L10feet
W7feet
H7feet


BASIC PARAMETERS

Brand	- Enersol Biopower®
Type of Gasifier	- Downdraft
Fuel	- 100% Biomass
Manpower Required	- 1no
Auxiliary Power Details	- Cooling fan Vibrator motor Water pump Distillation Pump Conveyor motor RS filter pump

Gas in 1 kg wood with 15% moisture	- up to 2NM ³
Wood Calorific Value	- 2100K-2500kcal/kg
Bulk density	- 200kg/m ³
Biomass consumption kg/kw/hr.	- 1.4 ± 0.2 kgs/kw-hr.
Char generation	- 5-7%

ESB-10 BIOMASS GASIFIER PARTS

PARTS NAME	-	MADE OF
Hopper	-	Mild Steel (MS Sheet)
Reduction chamber	-	Stainless Steel (SS Sheet) & Ceramic bricks
Ash storage tank	-	Mild Steel (MS Sheet)
Ash removal tank	-	Mild Steel (MS Sheet)
Cyclone	-	Mild Steel (MS Sheet)
Scrubber	-	Stainless Steel (SS Sheet)
RS Filter to remove tar	-	Mild Steel (MS Sheet) & Stainless Steel (SS Sheet)
Distillation tank	-	Stainless Steel (SS Sheet)
Saw-dust filter	-	Stainless Steel (SS Sheet)
Pan filter	-	Stainless Steel (SS Sheet)
Water tank	-	Mild Steel (MS Sheet)
Cooling tower	-	Aluminum sheet with PVC fills
Cotton filter	-	Stainless Steel (SS Sheet)

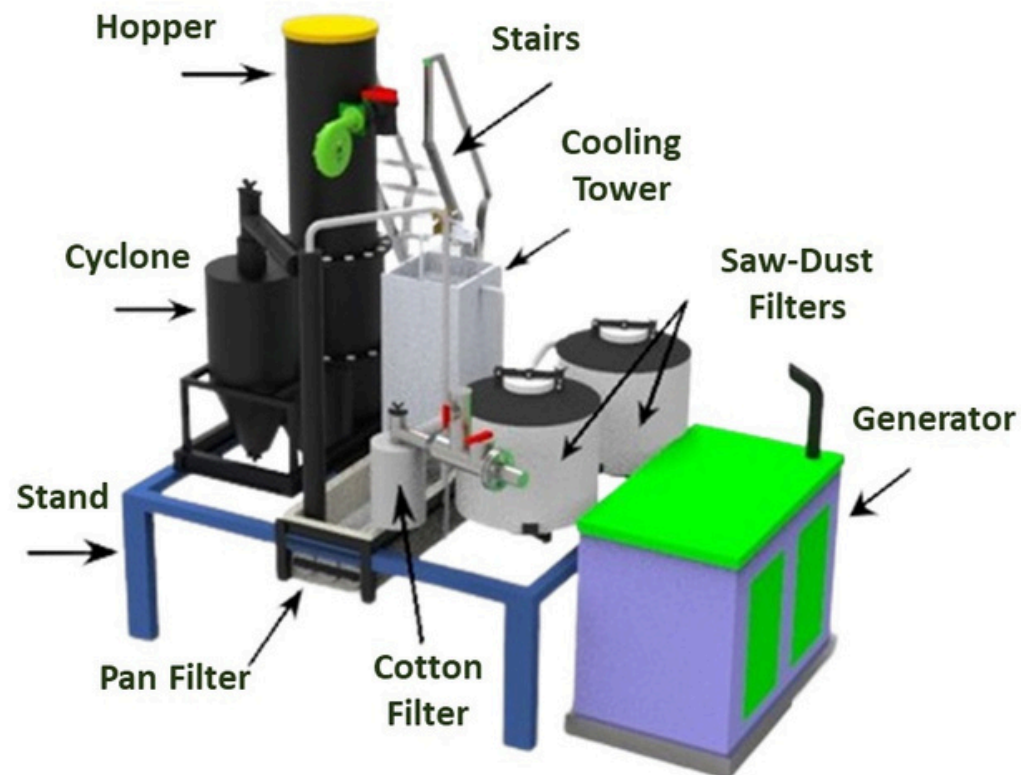

BASIC DETAILS



PARTICULAR	-	DESCRIPTION
Start-up	-	Automatic ignition
Biomass feeding system	-	Manual feeding
Feeding Frequency	-	Every 1.5-2 hrs.
Ash removal system	-	Manual
Frequency of removing ash	-	Every 1-2hrs.
Biomass consumption an hour	-	up to 15kg/hr.
Acceptable biomass size	-	2 X 2"
Acceptable moisture content	-	less than 20%
Ash content	-	up to 5-10%



BIOMASS GASIFIER OUTPUT

Biomass consumption	-	up to 15kg/hr.
Gas Flow (NM ³ /hr.)	-	30NM ³
Peak Rated Thermal Output	-	31,500Kcal - 37,500Kcal/hr.
Continuous Duty Rated Thermal Output (80%)	-	25,200-30,000Kcal/hr.
Average Gas Calorific Value (Kcal/Nm ³)	-	≥1,100
Gasification Temperature	-	1050 – 1100°C
Temperature of Gas at Gasifier Outlet (°C)	-	300 to 500°C
Indicative Gasification Efficiency (Hot gas mode)	-	>85%
Indicative Gasification Efficiency (Cold gas mode)	-	>75%



GAS COMPOSITION



Carbon monoxide (CO)
21.4%



Hydrogen (H₂) - 18.9%




Nitrogen (N₂) - 46%



Methane (CH₄) - 3.4%



Carbon dioxide
(CO₂) - 10.2%



FILTER CLEANING

FILTER NAME	CLEANING TIME	REMARK
Cyclone	Every 40-50 hrs.	Ash to be removed
Scrubber filter	Every 25-30 hrs.	To be checked
Saw-dust filter	Every 80-100 hrs.	Replace sawdust /coconut husk etc.
Distillation tank	Every 2-3hrs.	Extra water to be removed
Pan filter	Every 80-100 hrs.	To be cleaned
Cotton filter	Every 80-100 hrs.	Replace cotton fabric
Water tank capacity	250-300ltrs. Approx.	
Water level	Need to maintain minimum 75% water level all the time	
Water Evaporation	10-15 ltr. /hr. approx. (depends on climate of the place)	



FUEL SPECIFICATIONS

Woody biomass such as firewood (branches and twigs), wood chips, bamboo, forestry waste, agricultural waste, crop residues, biomass briquettes, and pellets can be utilized as fuel in ESB-R gasifiers.

The biomass to be used will need to be sized according to our specifications.

To achieve the desired output, the fuel must meet the following standard specifications:

- Net calorific value of not less than 3,600 Kcal/kg.
- Bulk density above 200 kg/m³.
- Ash softening temperature greater than 1,200°C.
- Ash content on a dry basis should be less than 5%.
- Moisture content should be less than 20%.
- Fines below 10 mm should be sieved and removed.
- The feedstock must be free from foreign matter such as dust, dirt, fines, fibers, stones, debris, soil, oil, metal, plastic, glass, etc.



ACCEPTABLE FEEDSTOCK

✓ **Agricultural Wastes**

✓ **Forest Wastes**

✓ **Agro-Industrial Wastes**

✓ **Pellets & Briquettes**

✓ **Energy Crops**



FUEL - ESB-R BIOMASS GASIFIER





OUR PRESTIGIOUS PARTNERS



Bharat Petroleum Corporation Ltd.





AWARDS & EXHIBITIONS





CONTACT US



Enersol Biopower Pvt. Ltd.

Plot No.-57A,Vrindavan Vihar,
Akeda Dunder, Laxminarayanpura,
Vishwakarma Industrial Area (VKI),
Road No.-19, Jaipur- 302013 (Rajasthan)




+91-9414535665
+91-7073495200
+91-9610103127



info@enersolbiopower.com
gayatri@enersolbiopower.com
raj@enersolbiopower.com



www.enersolbiopower.com
www.enersolbiopower.in

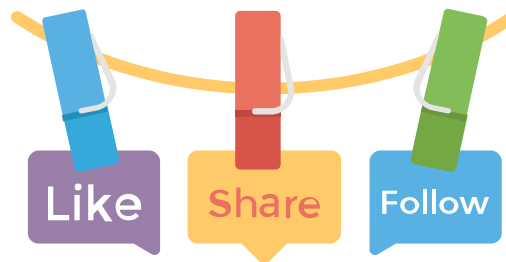

<https://www.youtube.com/@enersolbiopower-biomassgas3987>



<https://www.indiamart.com/enersol-biopower-jaipur/profile.html>



<https://twitter.com/EnersolBiopower>



<https://www.linkedin.com/company/enersol-biopower-pvt-ltd>



Instagram

https://www.instagram.com/enersol_biopower/