Development of an Integrated Modular Motor Drive (IMMD) System

Mesut Uğur
ugurm@metu.edu.tr

Ozan Keysan
keysan@metu.edu.tr

Department of Electrical and Electronics Engineering
Middle East Technical University

Introduction

In **conventional motor drive** systems, drive units are placed in a separate cabinet, and they are connected to the motor via long cables. This brings increased volume and weight as well as increased voltage overshoot and electromagnetic interference (EMI) problems.

In **integrated modular motor drives (IMMD),** the motor drive is integrated directly to the motor back-end and the system is modularized by dividing into several parts.

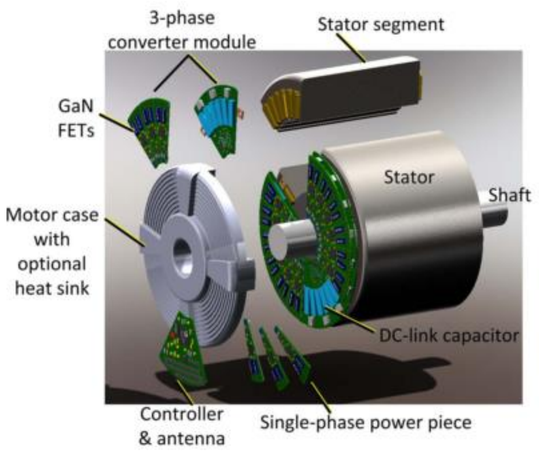

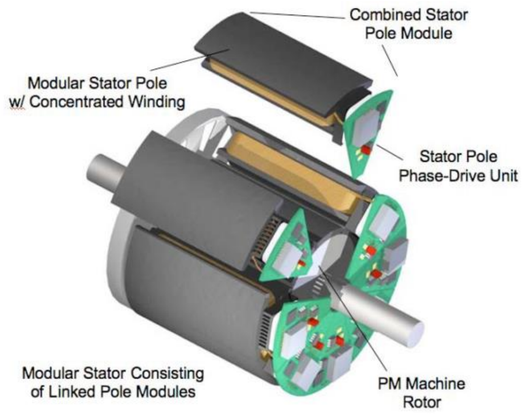

Motivation

Integration

- ✓ **Power density** of the overall system is enhanced significantly.
- ✓ **Voltage overshoots** due to cabling effect is eliminated.

Modularization

- ✓ **Fault tolerance** is increased
- ✓ **Voltage stress** on modules is reduced
- ✓ **Heat dissipation** is distributed to a wider area

Applications

Electric traction: electric vehicles, trains
Aerospace: aircrafts, space crafts

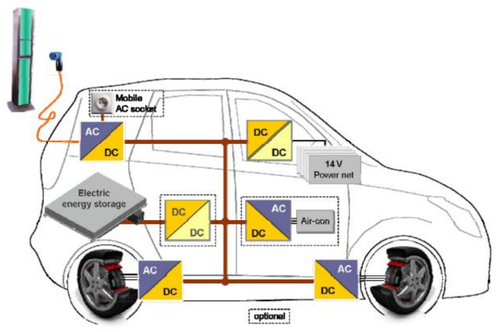

Challenges

- ❖ Fitting into a small volume requires size reduction and optimum placement of components.
- ❖ Cooling of both units should be achieved simultaneously.
- ❖ Power and control electronics components are subjected to high temperature and vibration

These challenges can be addressed by using **wide band-gap (WBG)** power semiconductor devices such as **Gallium Nitride (GaN).**

- Low semiconductor loss: **heat sink** size is reduced
- High operation frequency: **passive component** size is reduced

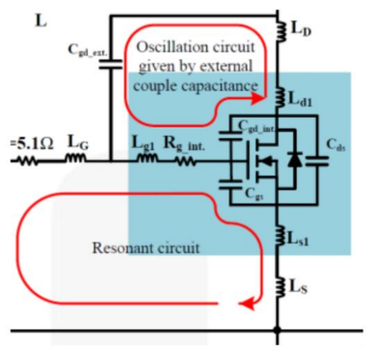

Additional challenges
Parasitic components become significant
Careful layout design is required

DC link capacitor optimization

DC link capacitors constitute 20% of **cost** and **weight**, and 30% of **volume**

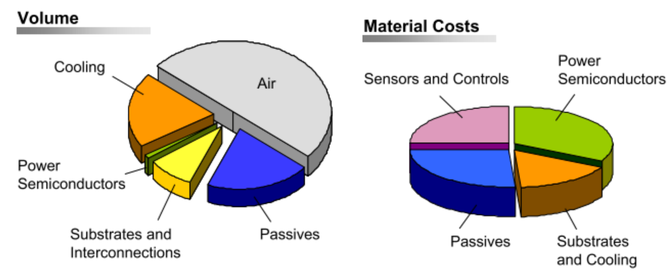

An **analytical model** has been constructed. An **algorithm** has been developed. A set of **film capacitors** are considered. Optimization is achieved based on:

- Power density
- Cost
- Height
- Temperature rise

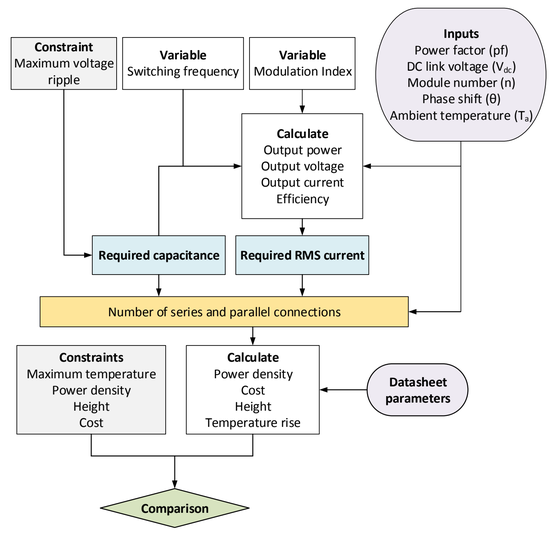

Effect of interleaving

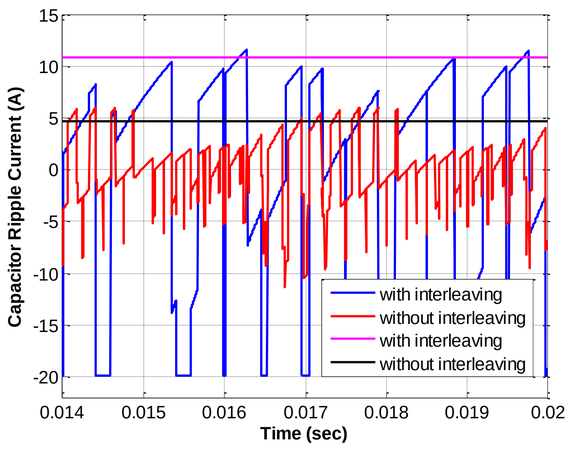

Phase-shift angle

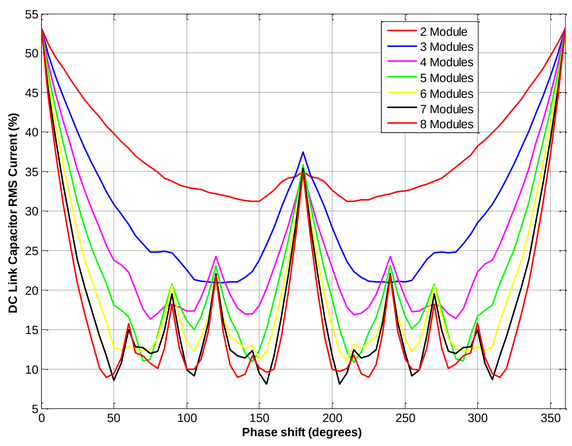

IMMD Design

Fractional slot machines
Frameless motor
M
G
M

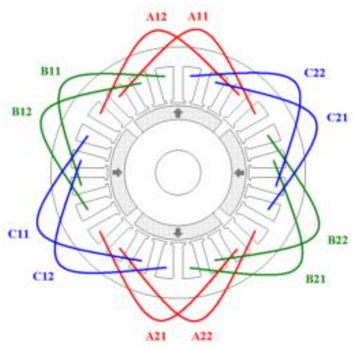

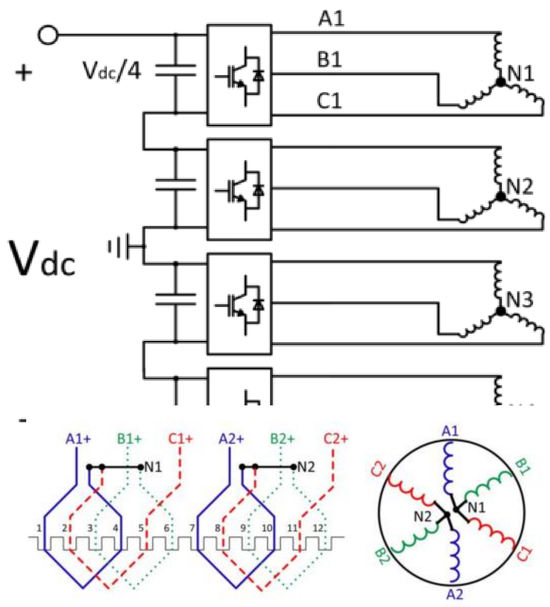

Conclusion

Here are my conclusions

References