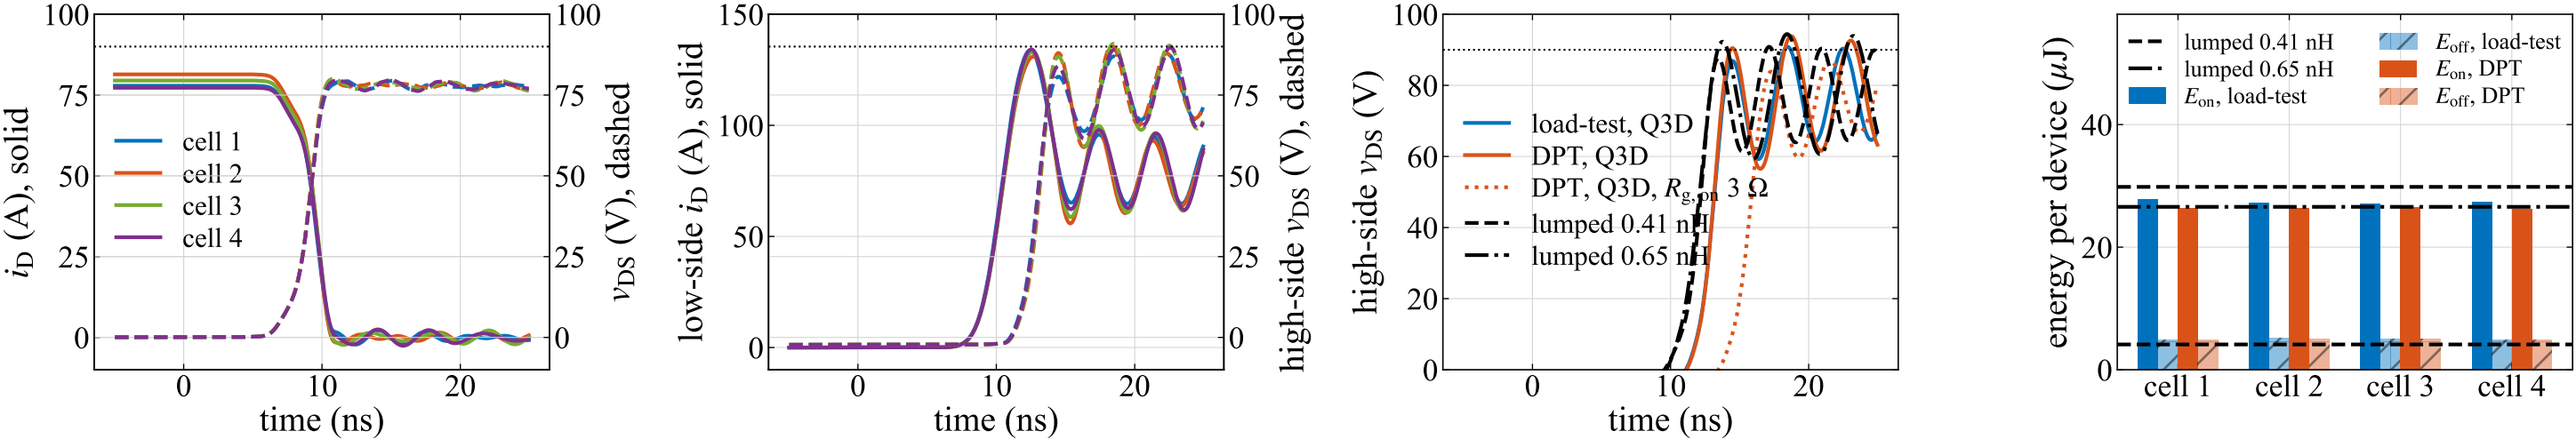
100
75
50
25
0
i_D (A), solid
v_{DS} (V), dashed
cell 1
cell 2
cell 3
cell 4
0
10
20
time (ns)
(a)
150
low-side i_D (A), solid
high-side v_{DS} (V), dashed
(b)
high-side v_{DS} (V)
load-test, Q3D
DPT, Q3D
DPT, Q3D, $R_{g,on}$ 3 Ω
lumped 0.41 nH
lumped 0.65 nH
(c)
energy per device (μJ)
E_{on}, load-test
E_{off}, load-test
E_{on}, DPT
E_{off}, DPT
(d)