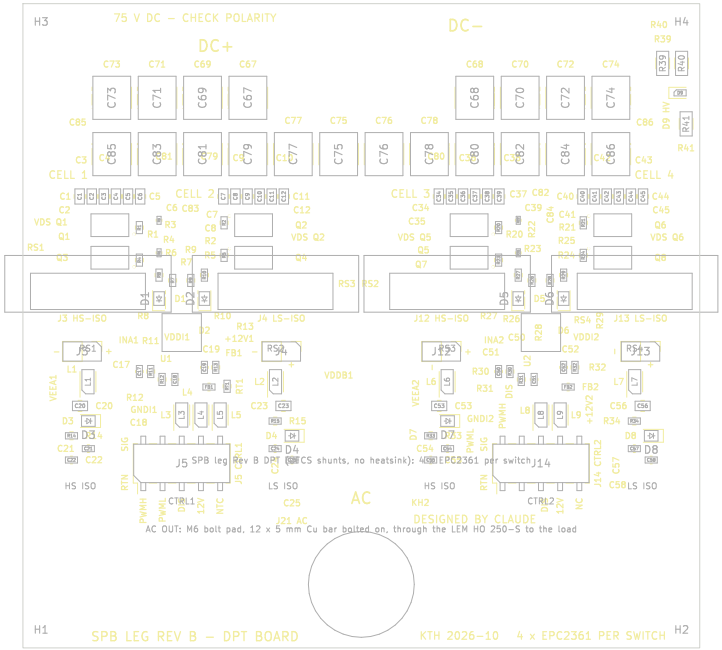

H3
75 V DC – CHECK POLARITY
DC+
DC–
H4
CELL 1
CELL 2
CELL 3
CELL 4
J3 HS–ISO
J4 LS–ISO
J12 HS–ISO
J13 LS–ISO
+12V1
+12V2
VDDB1
AC
J5 SPB leg Rev B DPT (CS shunts, no heatsink): 4 EPC2361 per switch
J14
HS ISO
LS ISO
CTRL1
CTRL2
J21 AC
DESIGNED BY CLAUDE
AC OUT: M6 bolt pad, 12 x 5 mm Cu bar bolted on, through the LEM HO 250–S to the load
H1
SPB LEG REV B – DPT BOARD
KTH 2026–10
4 x EPC2361 PER SWITCH
H2