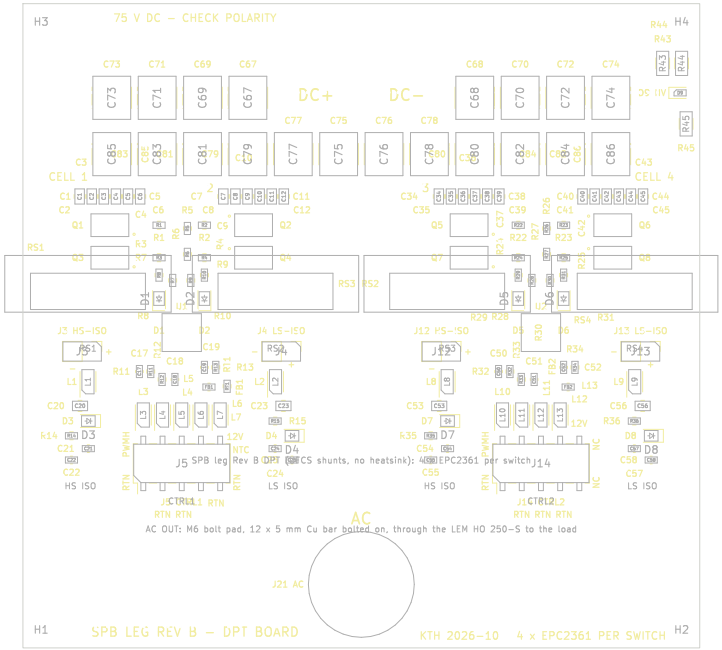

75 V DC – CHECK POLARITY
H3
H4
H1
H2
DC+
DC–
CELL 1
CELL 4
AC
AC OUT: M6 bolt pad, 12 x 5 mm Cu bar bolted on, through the LEM HO 250–S to the load
J21 AC
J5 SPB leg Rev B (DPT (CS shunts, no heatsink): 4x EPC2361 per switch)
J14
SPB LEG REV B – DPT BOARD
KTH 2026-10
4 x EPC2361 PER SWITCH