Detect fault; establish safe state
Isolate winding; preserve dc path

Check surviving-cell voltage margins
Equation (30)


No

Yes

Enforce current, thermal, and winding-voltage limits
Determine torque–speed envelope

Reduce bus voltage, use spare capacity, or remain shut down

Feasible reconfiguration

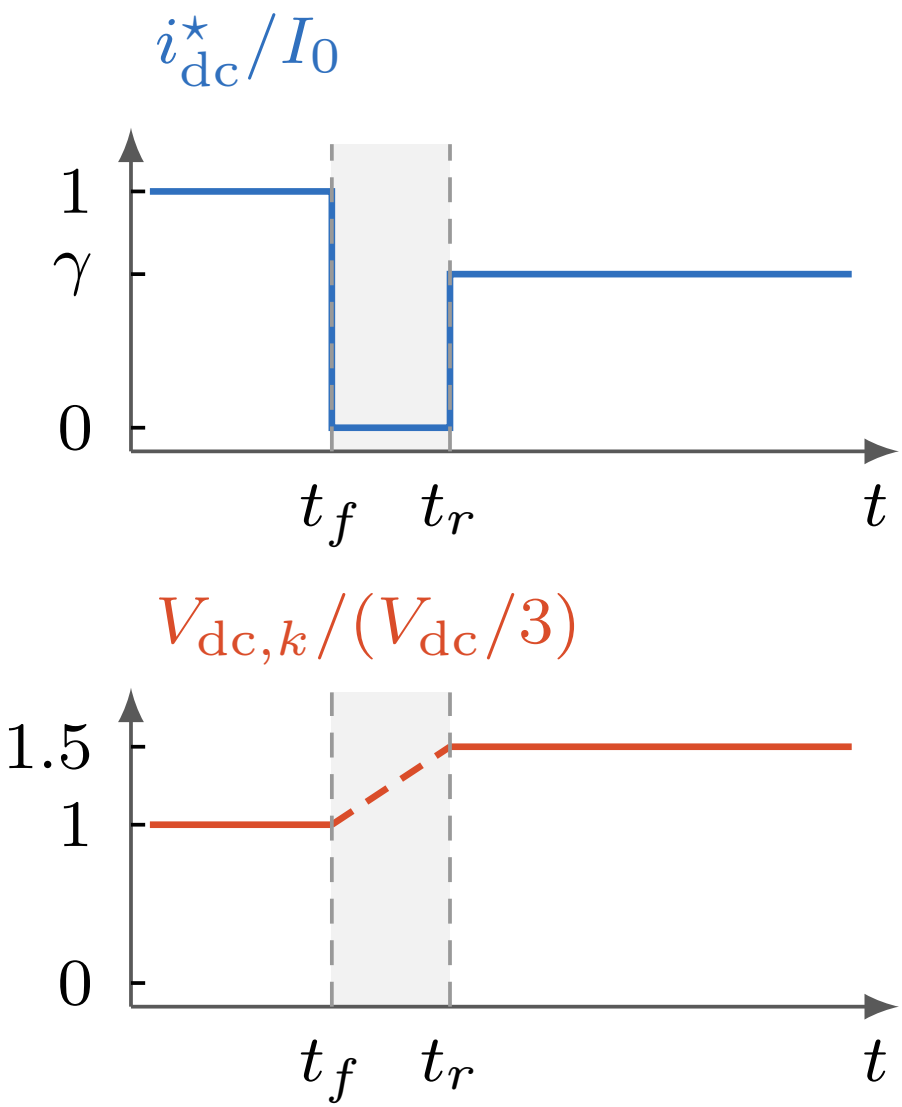

t_f: fault; t_r: resume
$0 < \gamma \leq 1$: feasible current limit