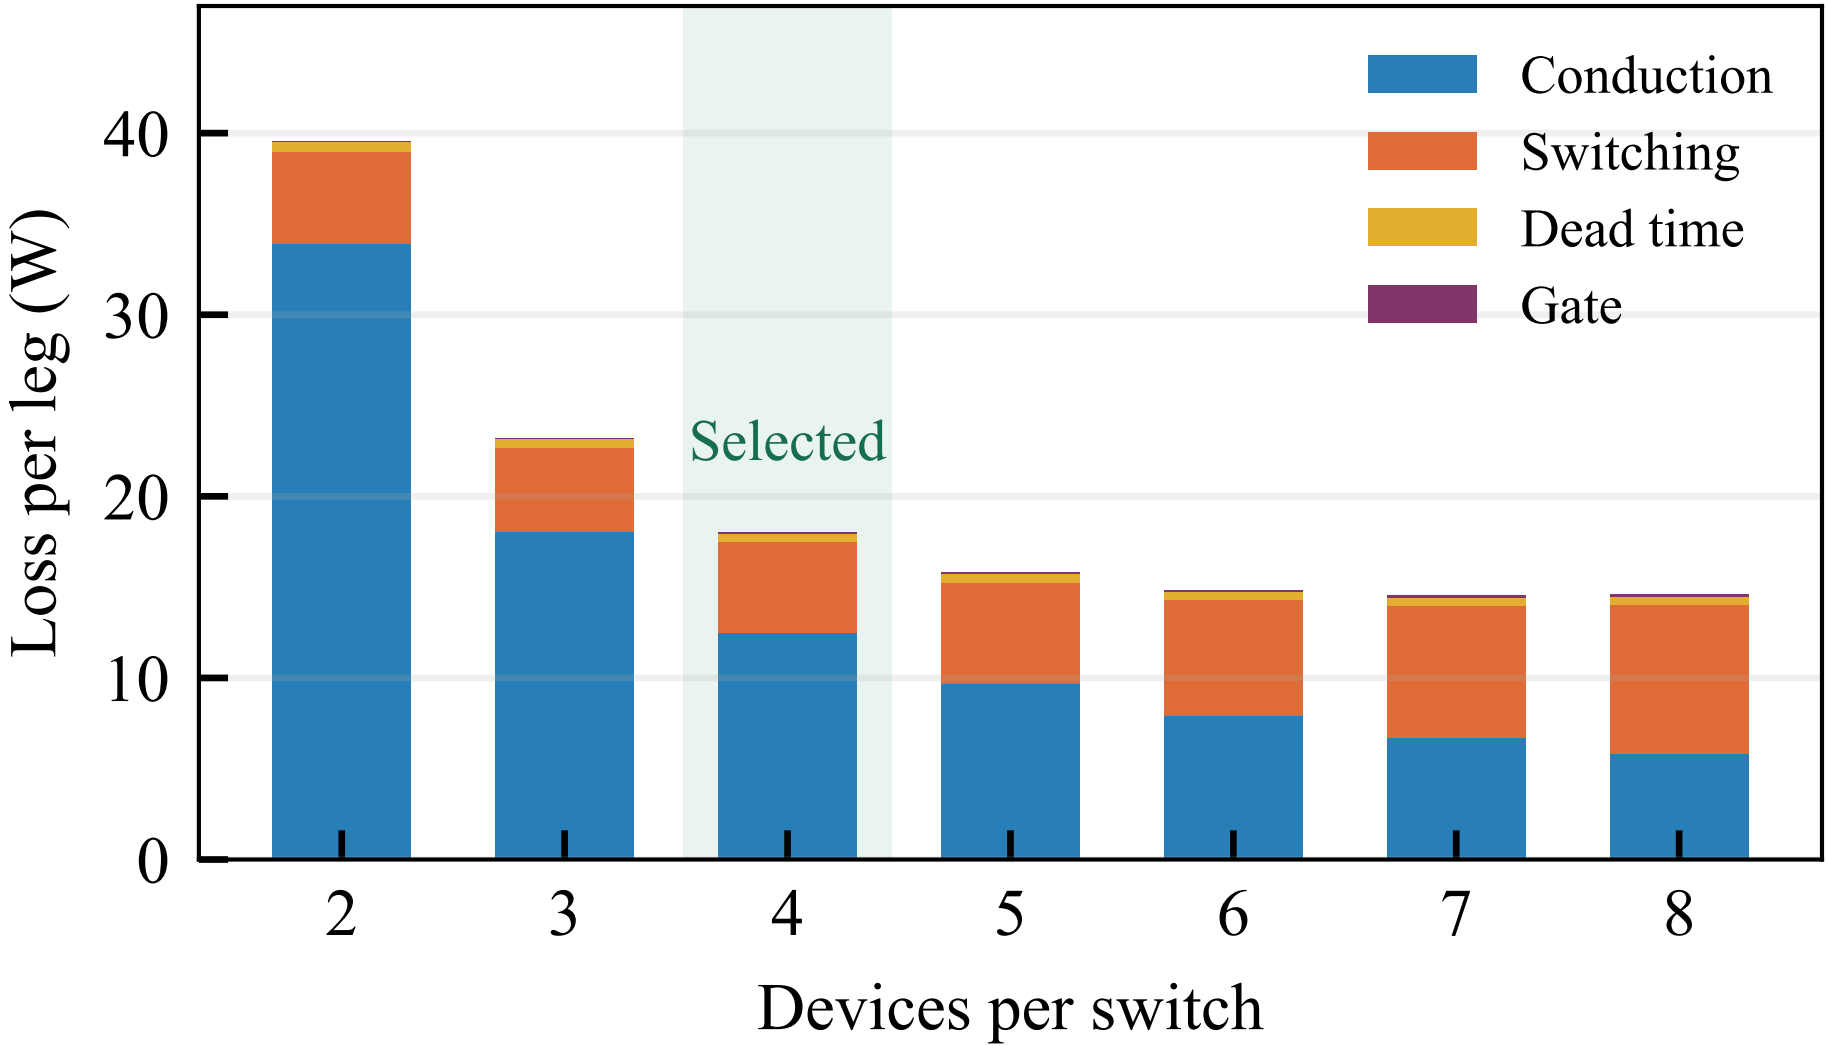
Conduction
Switching
Dead time
Gate
Selected
Loss per leg (W)
0
10
20
30
40
2
3
4
5
6
7
8
Devices per switch