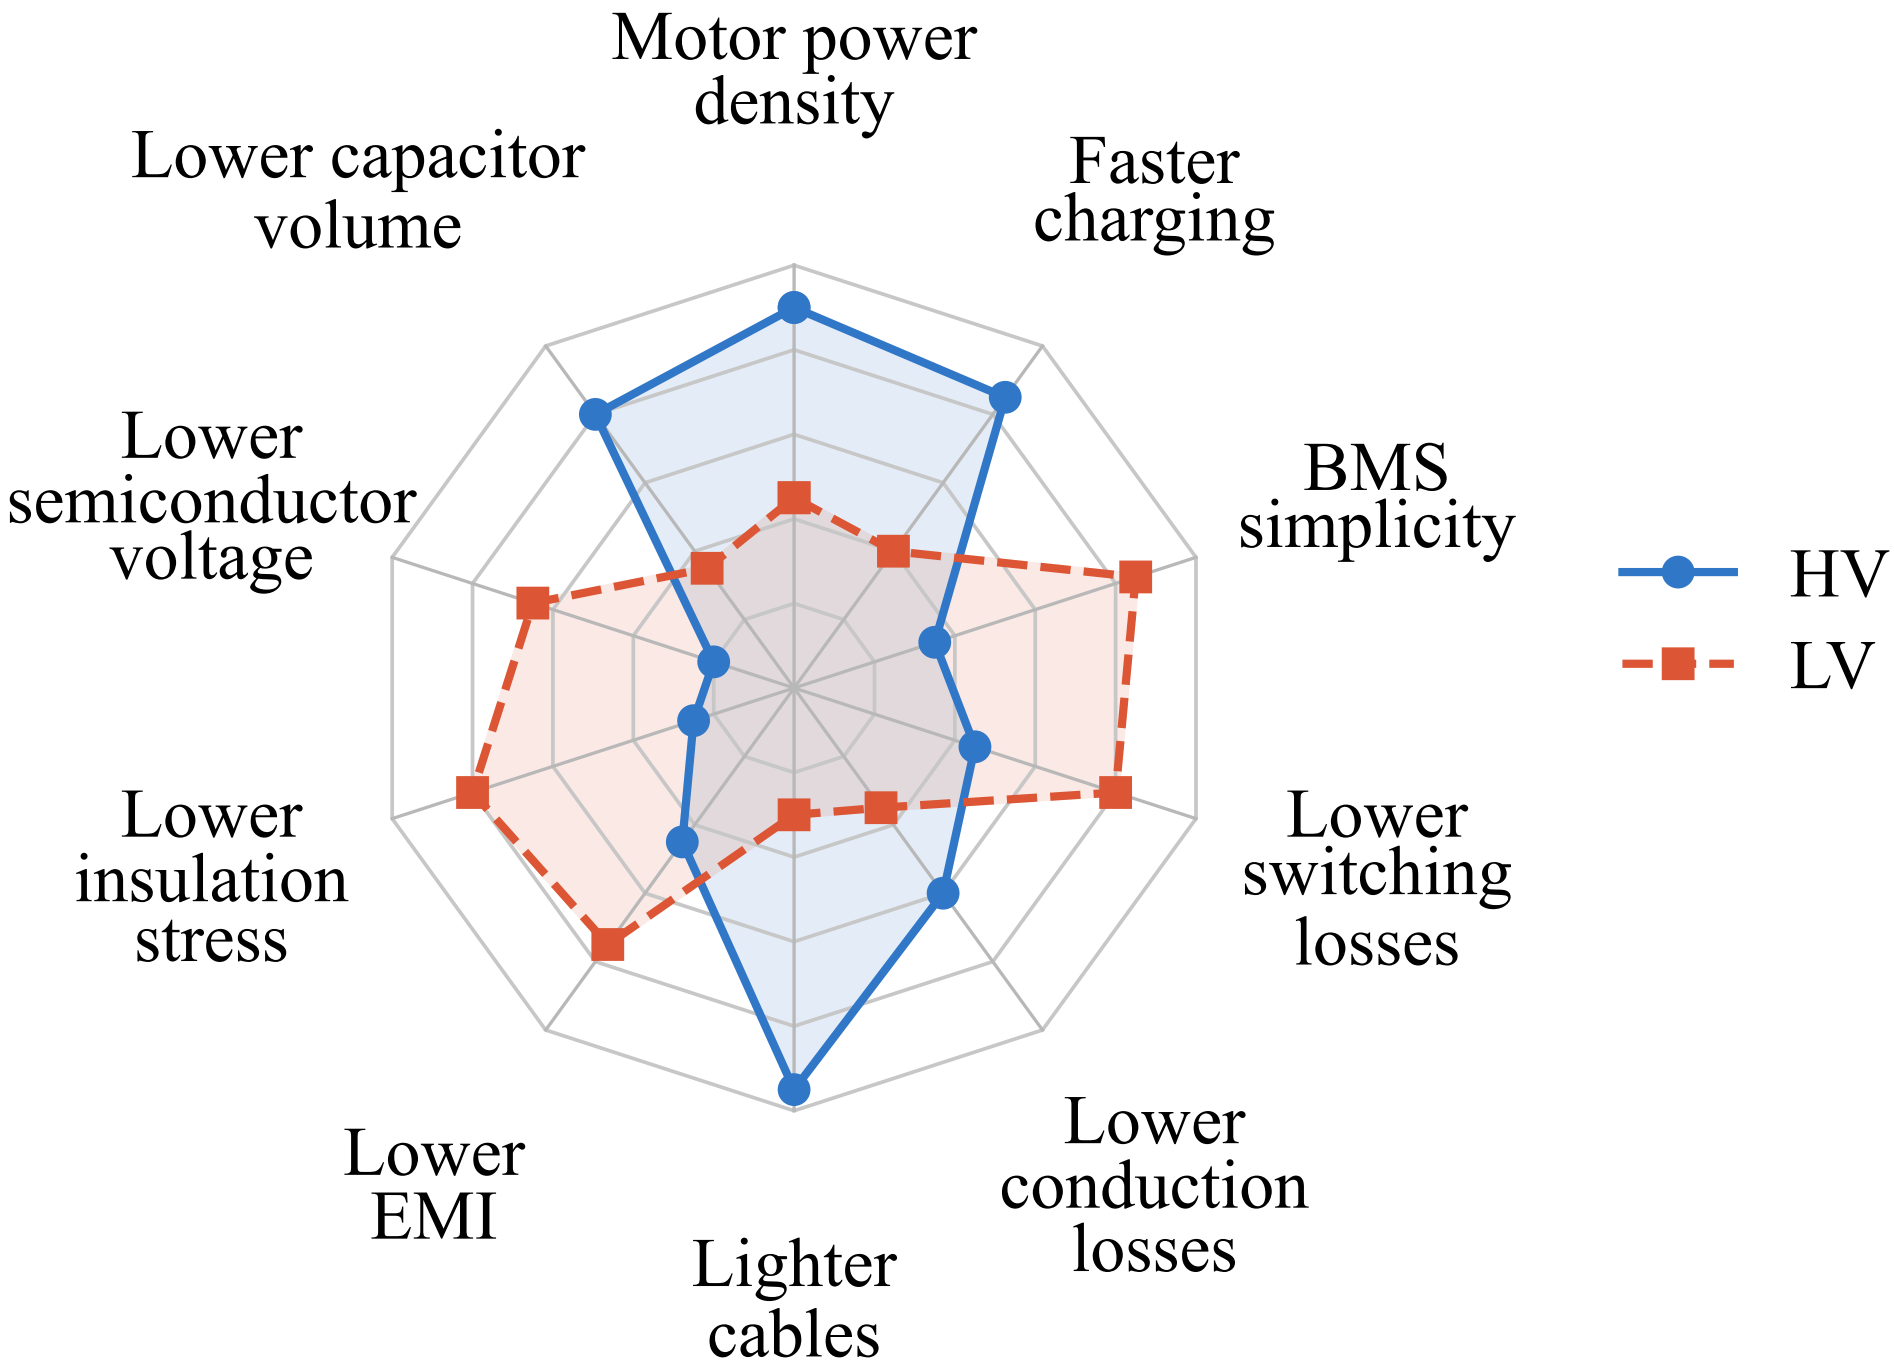
Motor power density
Faster charging
BMS simplicity
Lower switching losses
Lower conduction losses
Lighter cables
Lower EMI
Lower insulation stress
Lower semiconductor voltage
Lower capacitor volume
HV
LV