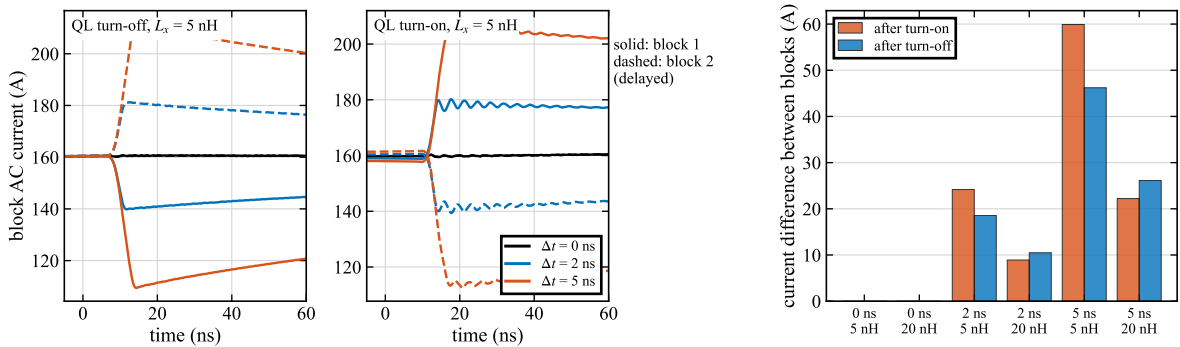
QL turn-off, L_x = 5 nH
block AC current (A)
time (ns)
QL turn-on, L_x = 5 nH
solid: block 1
dashed: block 2
(delayed)
Δt = 0 ns
Δt = 2 ns
Δt = 5 ns
current difference between blocks (A)
after turn-on
after turn-off
0 ns 5 nH
0 ns 20 nH
2 ns 5 nH
2 ns 20 nH
5 ns 5 nH
5 ns 20 nH

(a) **(b)** **(c)**