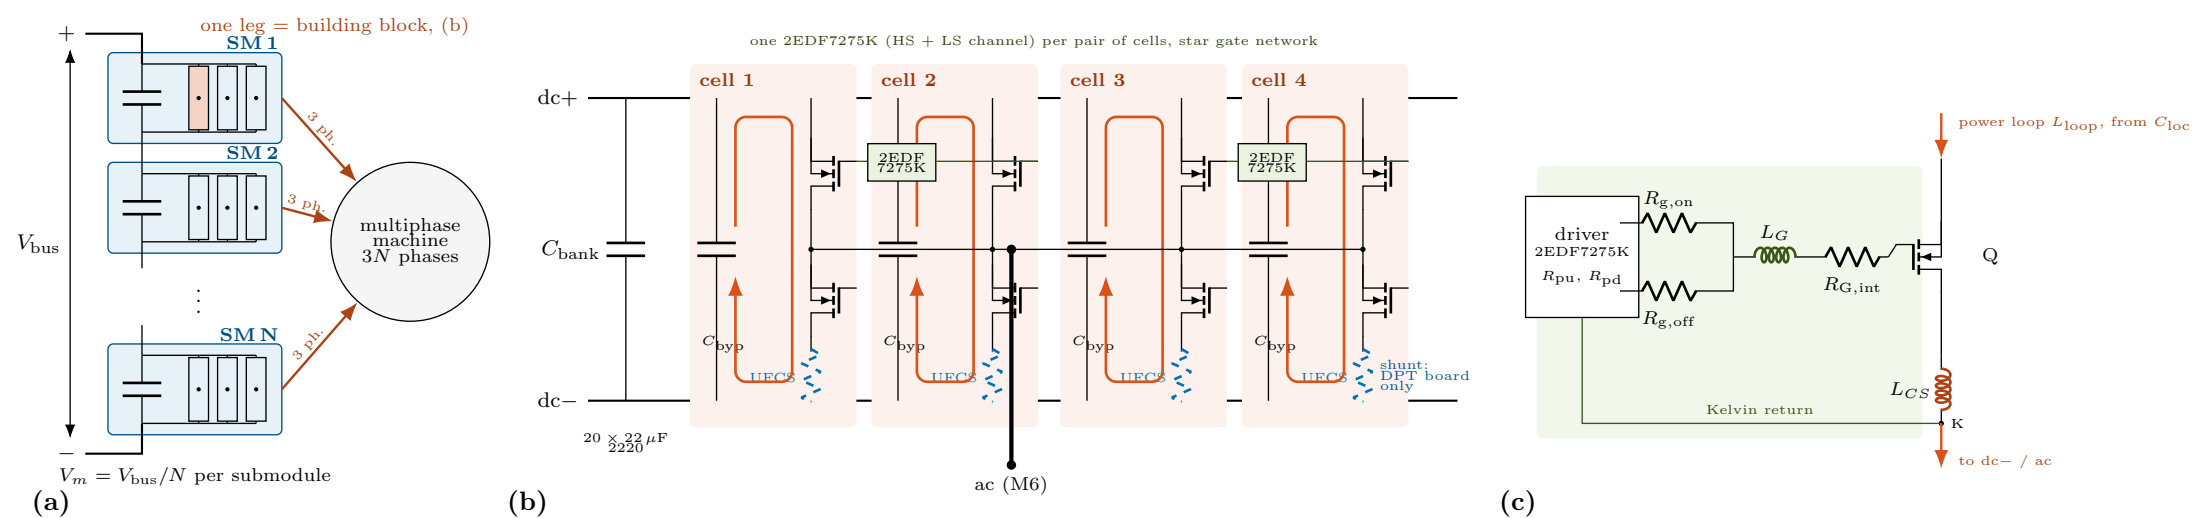

one leg = building block, (b)
SM 1
SM 2
SM N
3 ph.
3 ph.
3 ph.
multiphase machine 3N phases
+
−
V_{bus}
$V_m = V_{\text{bus}}/N$ per submodule
(a)
one 2EDF7275K (HS + LS channel) per pair of cells, star gate network
cell 1
cell 2
cell 3
cell 4
dc+
dc−
C_{bank}
$20 \times 22\,\mu\text{F}$ 2220
2EDF 7275K
C_{byp}
UECS
shunt: DPT board only
ac (M6)
(b)
power loop L_{loop}, from C_{loc}
driver 2EDF7275K
R_{pu}, R_{pd}
$R_{\text{g,on}}$
$R_{\text{g,off}}$
L_G
$R_{\text{G,int}}$
Q
L_{CS}
Kelvin return
K
to dc− / ac
(c)