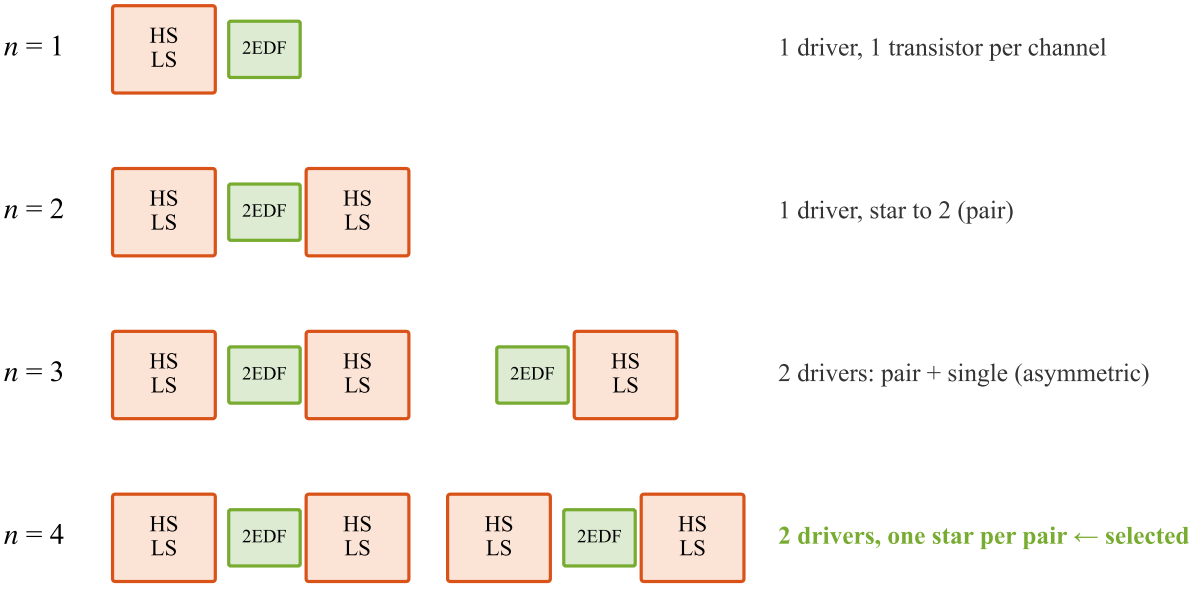Each box HS/LS = one cell (high- and low-side EPC2361); each driver IC = 2 channels (HS + LS)