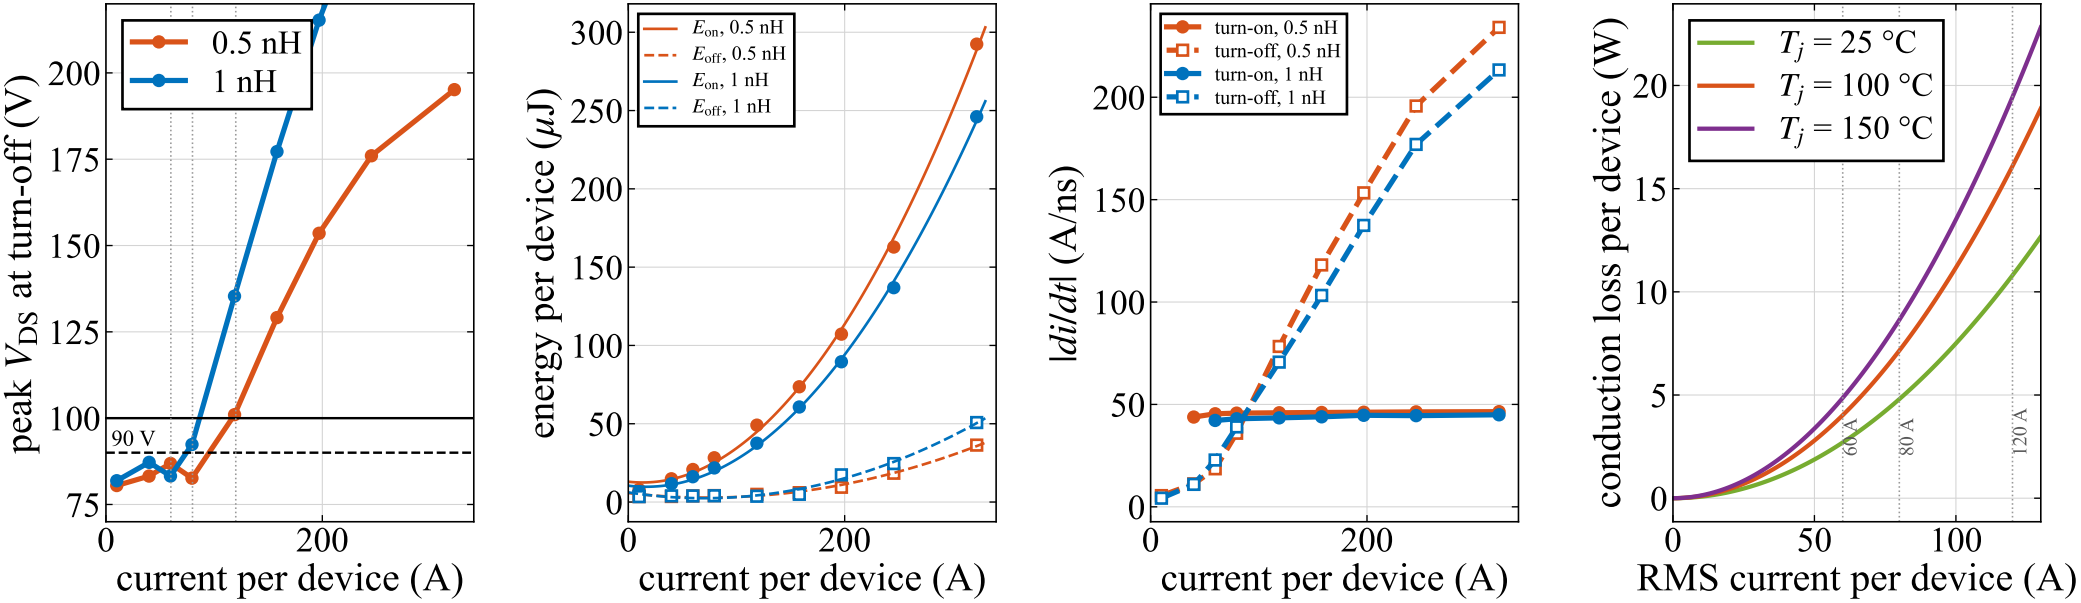
0.5 nH
1 nH
peak V_{DS} at turn-off (V)
90 V
current per device (A)
(a)
E_{on}, 0.5 nH
E_{off}, 0.5 nH
E_{on}, 1 nH
E_{off}, 1 nH
energy per device (μJ)
current per device (A)
(b)
turn-on, 0.5 nH
turn-off, 0.5 nH
turn-on, 1 nH
turn-off, 1 nH
|di/dt| (A/ns)
current per device (A)
(c)
T_j = 25 °C
T_j = 100 °C
T_j = 150 °C
60 A
80 A
120 A
conduction loss per device (W)
RMS current per device (A)
(d)