

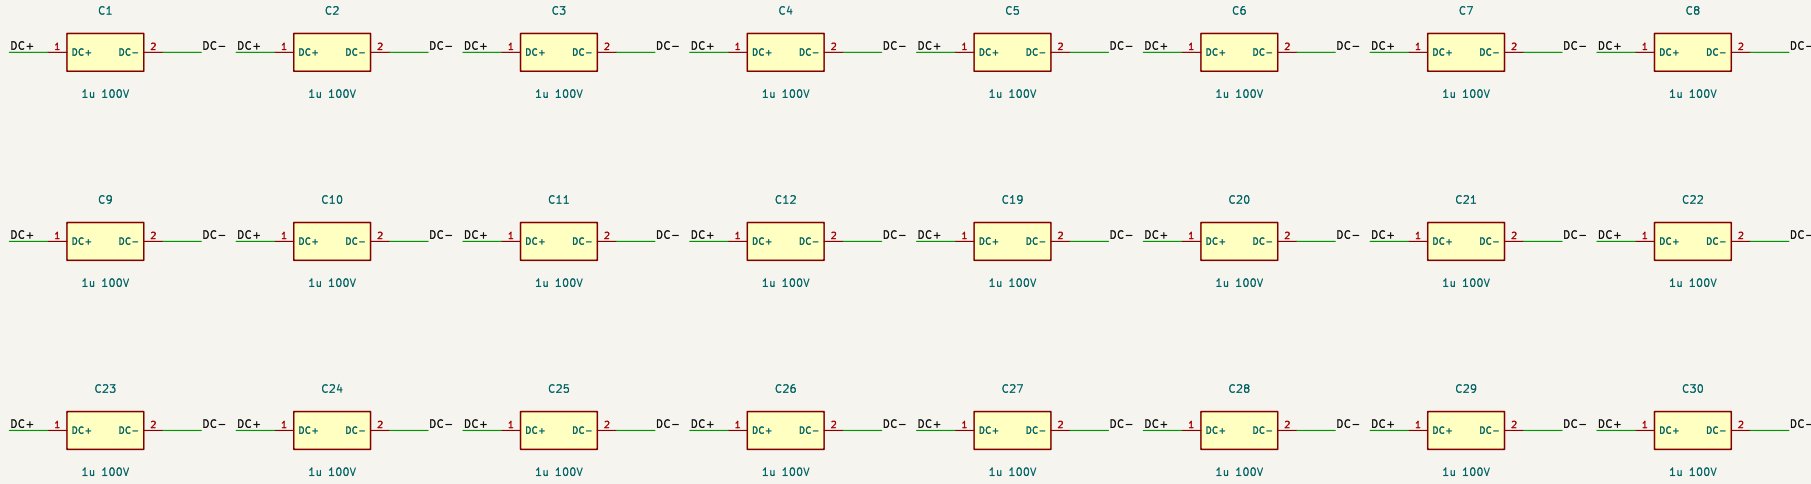




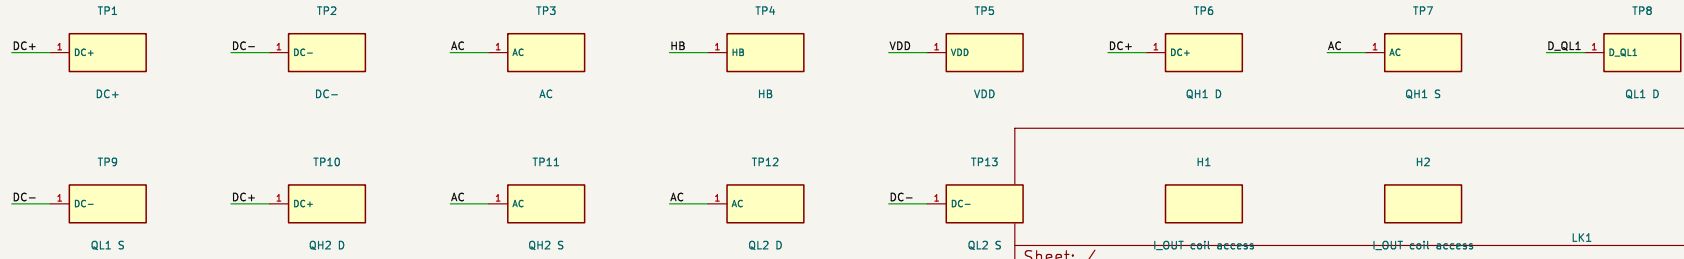
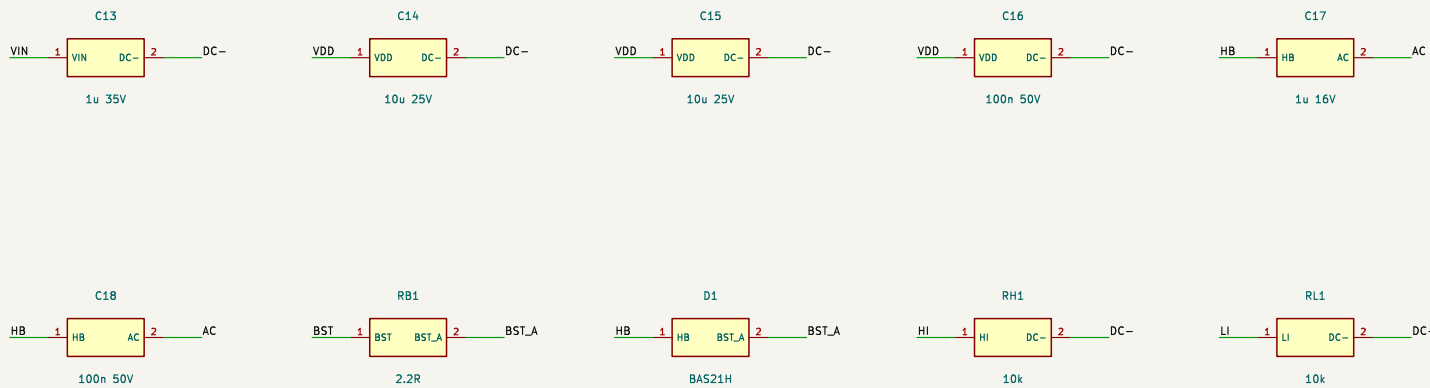













EPC2361 / TWO PARALLEL DEVICES PER SWITCH

75 V max | 36.7 A RMS / 51.9 A peak target | 50 kHz nominal, 100 kHz max | Engineering prototype



24 BUS CAPS: SIX ABOVE AND SIX BELOW EACH PAIR. ALL ON TOP FACE.



IIM: external HI/LI MUST have nonoverlap. Bootstrap needs startup charging and periodic low-side intervals; no sustained100% high-side duty.

G/KS headers: do not attach an external driver with onboard outputs connected. RG footprints remain independently tunable.

Sheet: /
File: epc2361-prototype-p6.kicad_sch
Title: Four EPC2361 onboard-driver prototype
Size: A3 Date: 2026-09-22
KiCad E.D.A. kicad-cli 7.0.10
Rev: P6
Id: 1/1