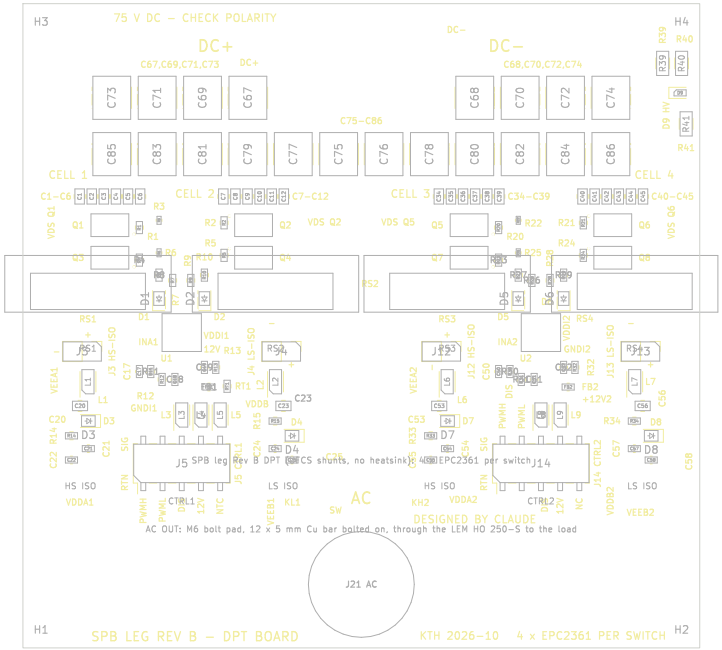

H3
75 V DC – CHECK POLARITY
H4
DC+
DC–
C67,C69,C71,C73
C68,C70,C72,C74
C75–C86
CELL 1
CELL 2
CELL 3
CELL 4
C1–C6
C7–C12
C34–C39
C40–C45
VDS Q1
VDS Q2
VDS Q5
VDS Q6
J5 SPB leg Rev B DPT (CS shunts, no heatsink)
4 x EPC2361 per switch
HS ISO
LS ISO
AC
DESIGNED BY CLAUDE
AC OUT: M6 bolt pad, 12 x 5 mm Cu bar bolted on, through the LEM HO 250–S to the load
J21 AC
H1
SPB LEG REV B – DPT BOARD
KTH 2026–10
4 x EPC2361 PER SWITCH
H2