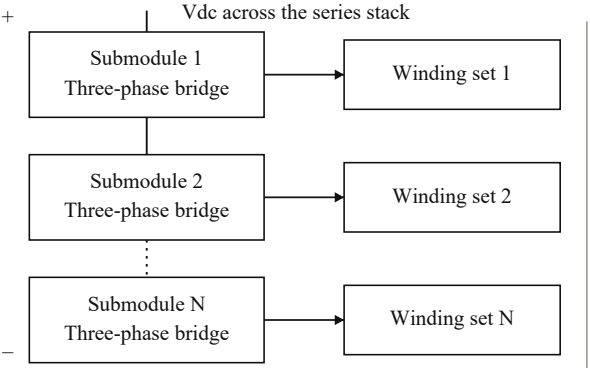

One submodule: three phase legs
Each leg carries the required phase current

One phase leg
n parallel transistors per switch

Submodule voltage: Vm = Vdc / N

Repeated local commutation cells and paired gate drive