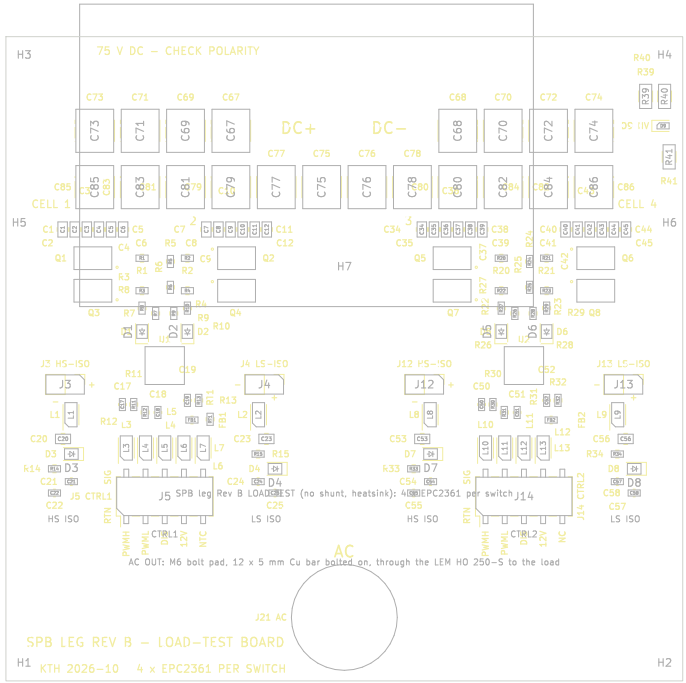

75 V DC – CHECK POLARITY
DC+
DC–
CELL 1
CELL 4
H1
H2
H3
H4
H5
H6
H7
J3 HS–ISO
J4 LS–ISO
J12 HS–ISO
J13 LS–ISO
J5 SPB leg Rev B LOAD–TEST (no shunt, heatsink): 4 × EPC2361 per switch
J14
J5 CTRL1
J14 CTRL2
HS ISO
LS ISO
CTRL1
CTRL2
AC
AC OUT: M6 bolt pad, 12 × 5 mm Cu bar bolted on, through the LEM HO 250–S to the load
J21 AC
SPB LEG REV B – LOAD–TEST BOARD
KTH 2026–10 4 × EPC2361 PER SWITCH