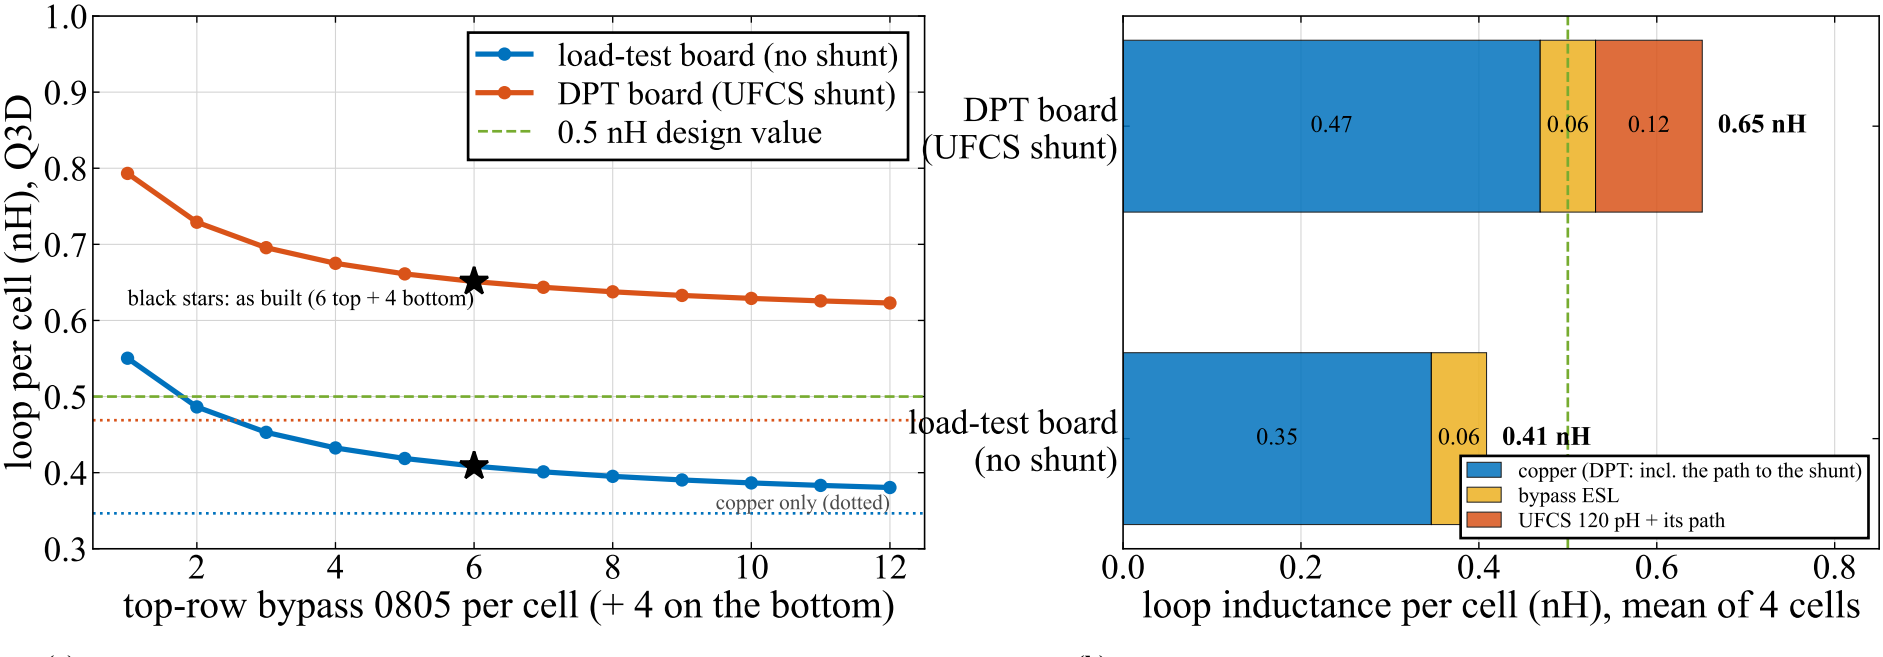
load-test board (no shunt)
DPT board (UFCS shunt)
0.5 nH design value
black stars: as built (6 top + 4 bottom)
copper only (dotted)
loop per cell (nH), Q3D
top-row bypass 0805 per cell (+ 4 on the bottom)
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.3
2
4
6
8
10
12
(a)
DPT board (UFCS shunt)
load-test board (no shunt)
0.47
0.06
0.12
0.65 nH
0.35
0.06
0.41 nH
copper (DPT: incl. the path to the shunt)
bypass ESL
UFCS 120 pH + its path
0.0
0.2
0.4
0.6
0.8
loop inductance per cell (nH), mean of 4 cells
(b)