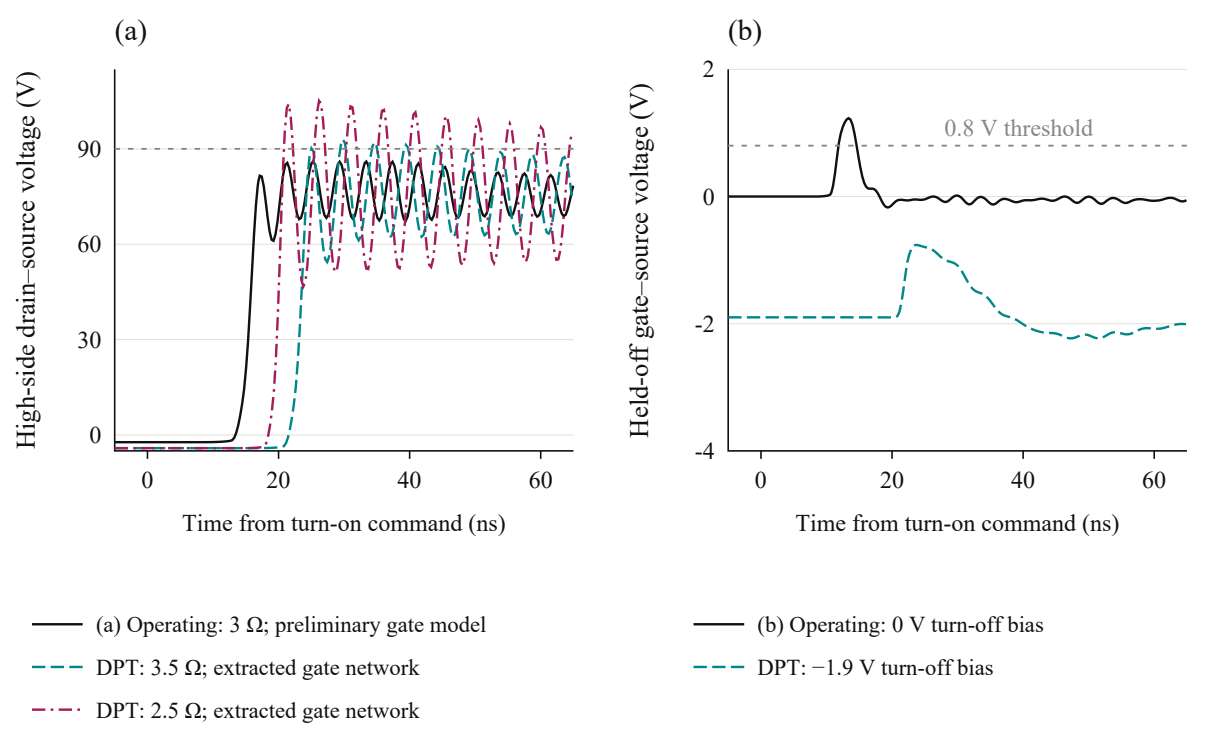

(a)
High-side drain–source voltage (V)
90
60
30
0
0
20
40
60
Time from turn-on command (ns)
(b)
Held-off gate–source voltage (V)
2
0
-2
-4
0.8 V threshold
0
20
40
60
Time from turn-on command (ns)
(a) Operating: 3 Ω; preliminary gate model
DPT: 3.5 Ω; extracted gate network
DPT: 2.5 Ω; extracted gate network
(b) Operating: 0 V turn-off bias
DPT: −1.9 V turn-off bias