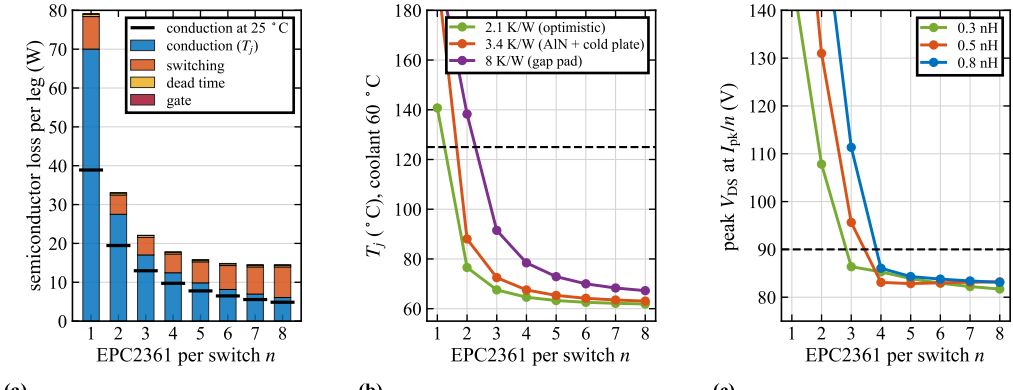
semiconductor loss per leg (W)
conduction at 25 °C
conduction (T_j)
switching
dead time
gate
EPC2361 per switch n
(a)
T_j (°C), coolant 60 °C
2.1 K/W (optimistic)
3.4 K/W (AlN + cold plate)
8 K/W (gap pad)
EPC2361 per switch n
(b)
peak V_{DS} at I_{pk}/n (V)
0.3 nH
0.5 nH
0.8 nH
EPC2361 per switch n
(c)