

Install pfsense FW

download pfsense


<https://atxfiles.netgate.com/mirror/downloads/pfSense-CE-2.7.2-RELEASE-amd64.iso.gz>

pfSense Docs:

<https://docs.netgate.com/pfsense/en/latest/>

Recommended Hardware:

<https://github.com/JamesTurland/JimsGarage/blob/main/Homelab-Buyer's-Guide/Q3-2023.md>

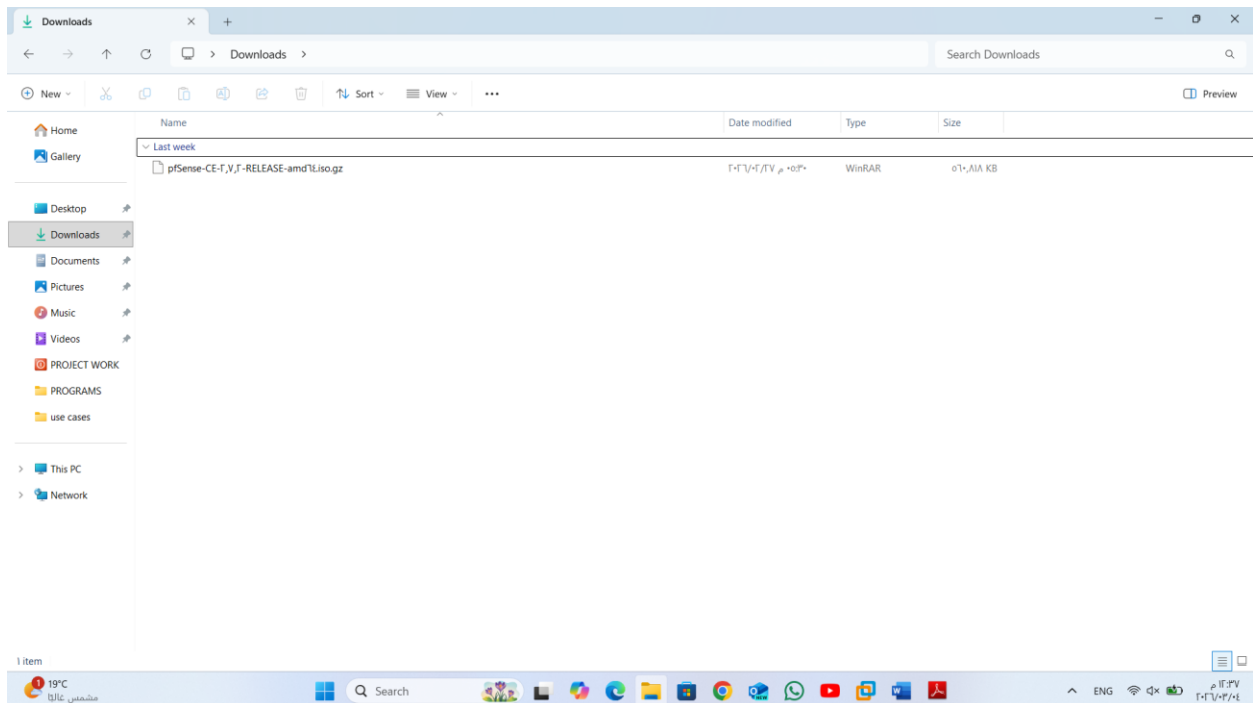

install it in VMware create a 5 network card

Network Adapter: Custom (VMnet0):

WAN_192.168.250.129/24 INTERNET: 192.168.250.129/24

Network Adapter: Custom (VMnet1):

LAN_192.168.254.2/24 DATACENTER_MANAGE: 192.168.254.2/24

Network Adapter: Custom (VMnet2):

DMZ_192.168.120.1/24 WEBSRV_WEBAPP: 192.168.120.1/24

Network Adapter: Custom (VMnet3):

WINDOWS10_PC1_10.1.1.1/24 HR: 10.1.1.1/24

Network Adapter: Custom (VMnet4):

WINDOWS10_PC2_10_2_1_1_FINANCE: 10.2.1.1/24

after installation complete access Pfsense from Windows Server 2019 AD Machine in Custom (VMnet1):

LAN_1921682542_DATACENTER_MANAGE: 192.168.254.2/24 via web browser by http://192.168.254.2/

require check update from Tab >> System >> update Notes: add all VM machine in LAN Network add static Ip Range 192.168.200.0/24 Subnet 255.255.255.0 Default Gateway firewall Ip like 192.168.200.1

now send logs to splunk

scroll down to and click save now configure receiving in splunk >> settings >> data inputs >> UDP

and click next source Type pfsense



scroll down to



click Review >> submitcheck logs send successfully



Minimum Hardware Requirements



The minimum hardware requirements for pfSense® software on hardware not sold by Netgate are:



- 64-bit amd64 (x86-64) compatible CPU
- 1GB or more RAM
- 8 GB or larger disk drive (SSD, HDD, etc)
- One or more compatible network interface cards
- Bootable USB drive or high capacity optical drive (DVD or BD) for initial installation

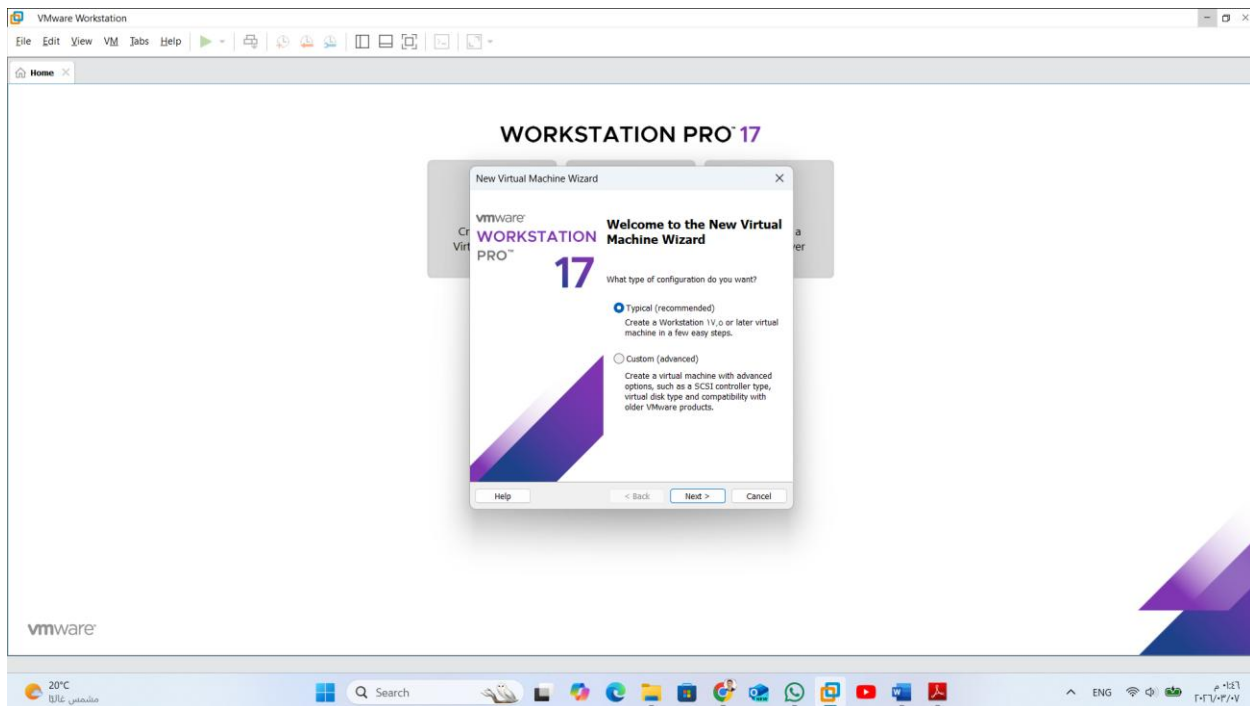
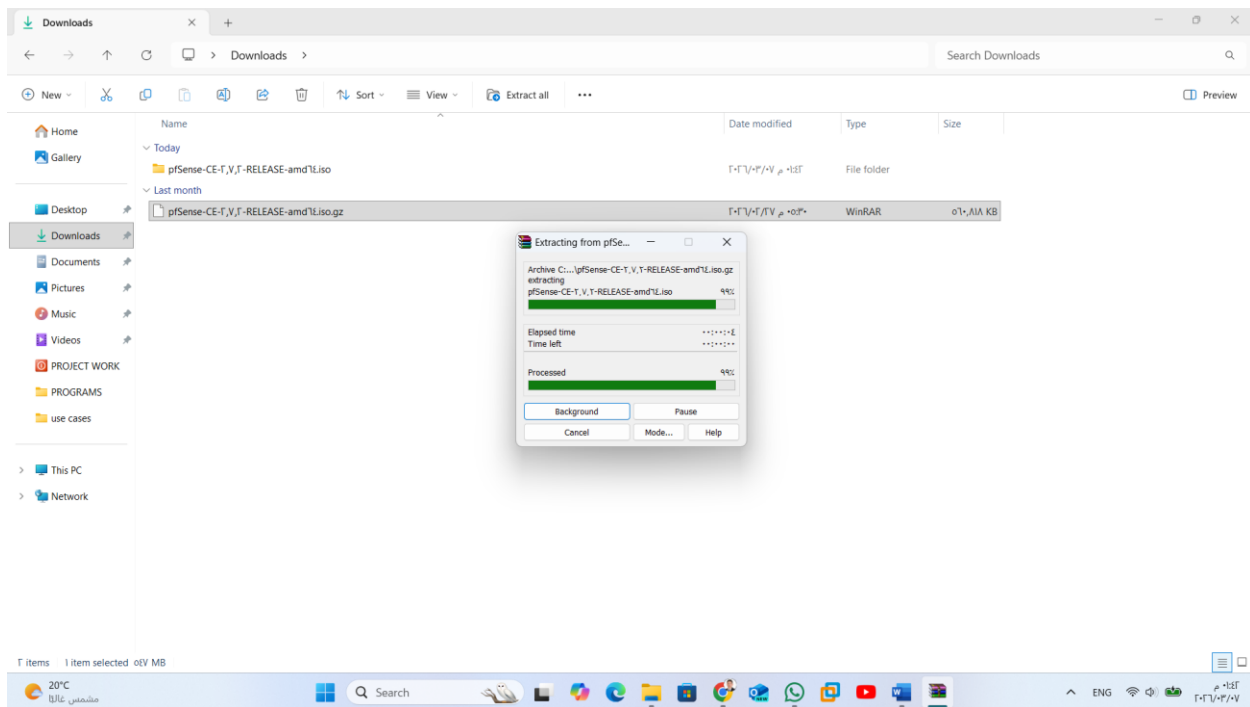


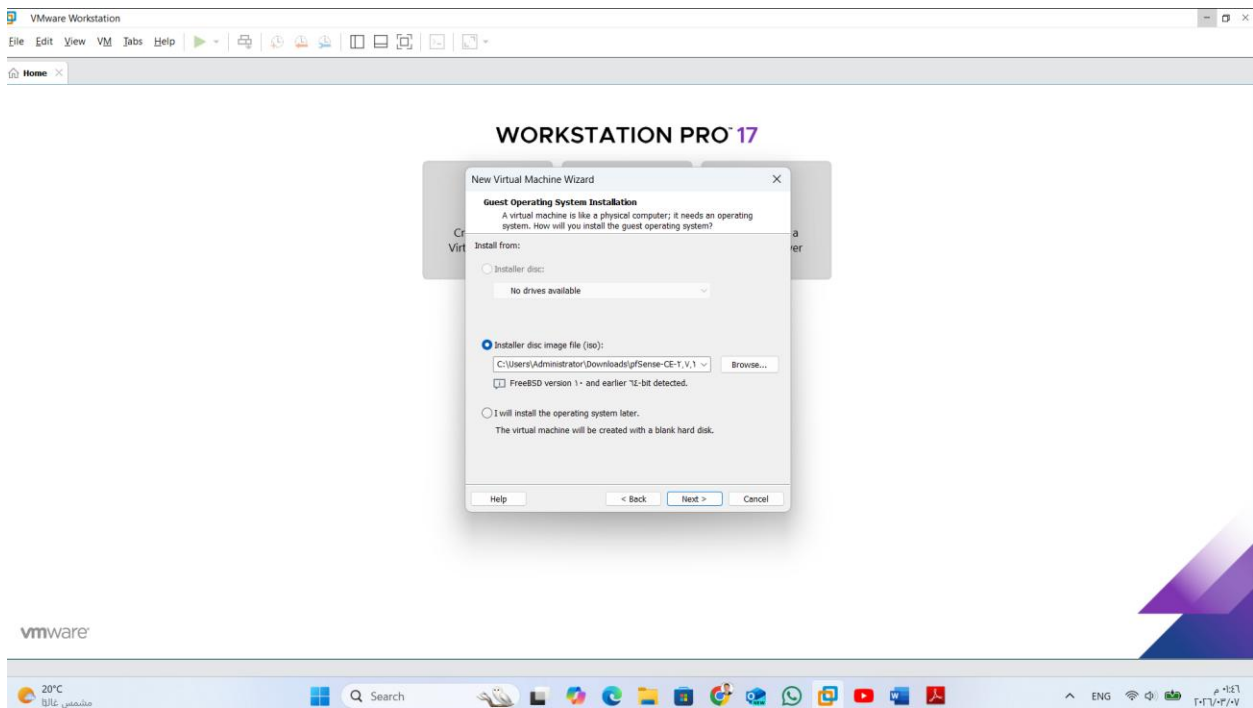
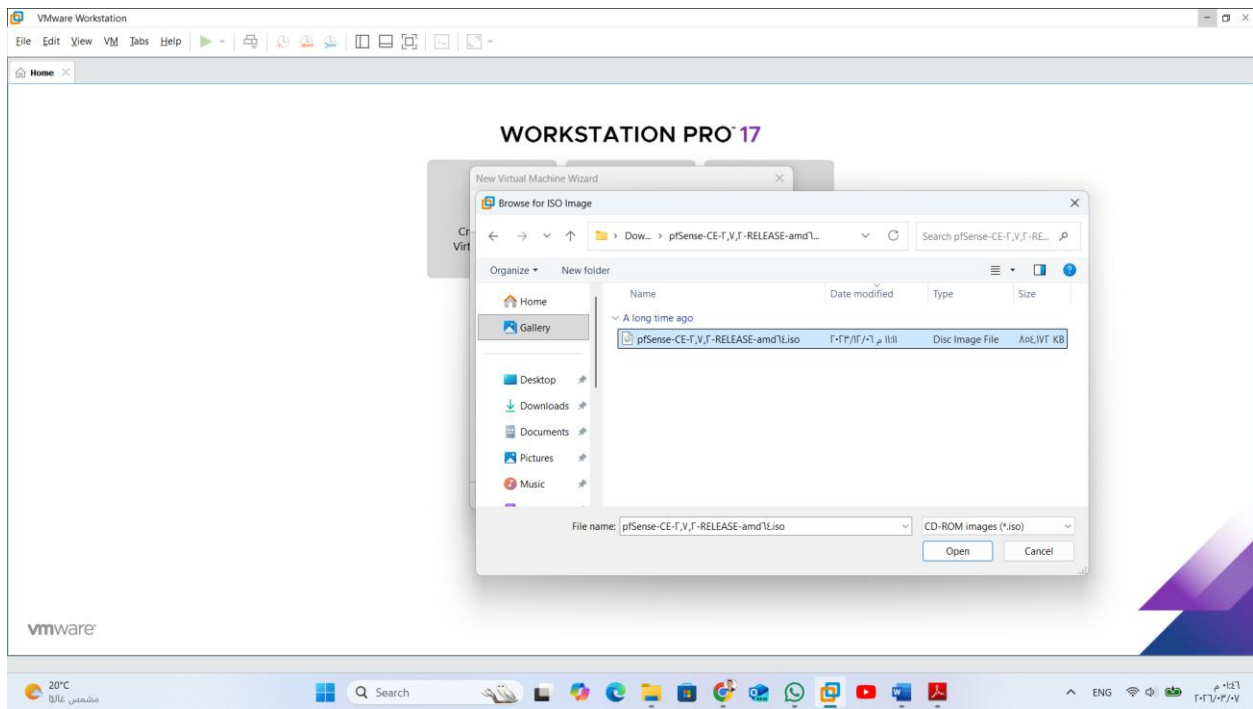


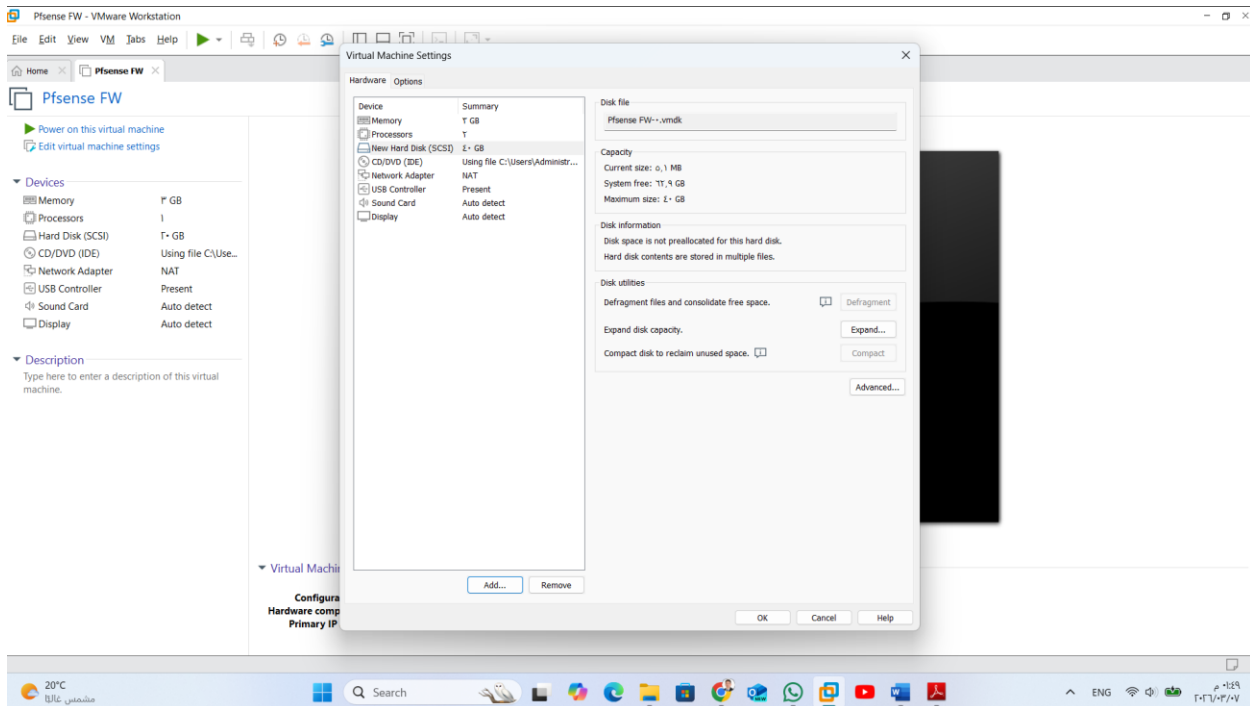
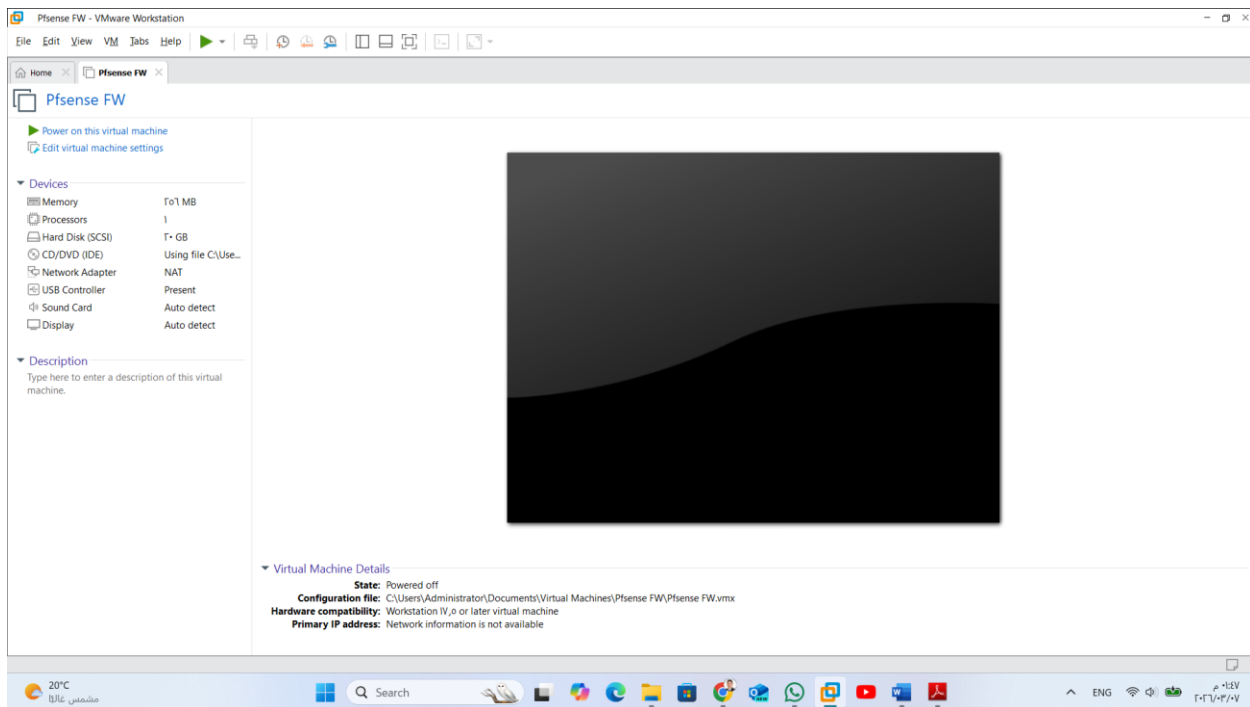


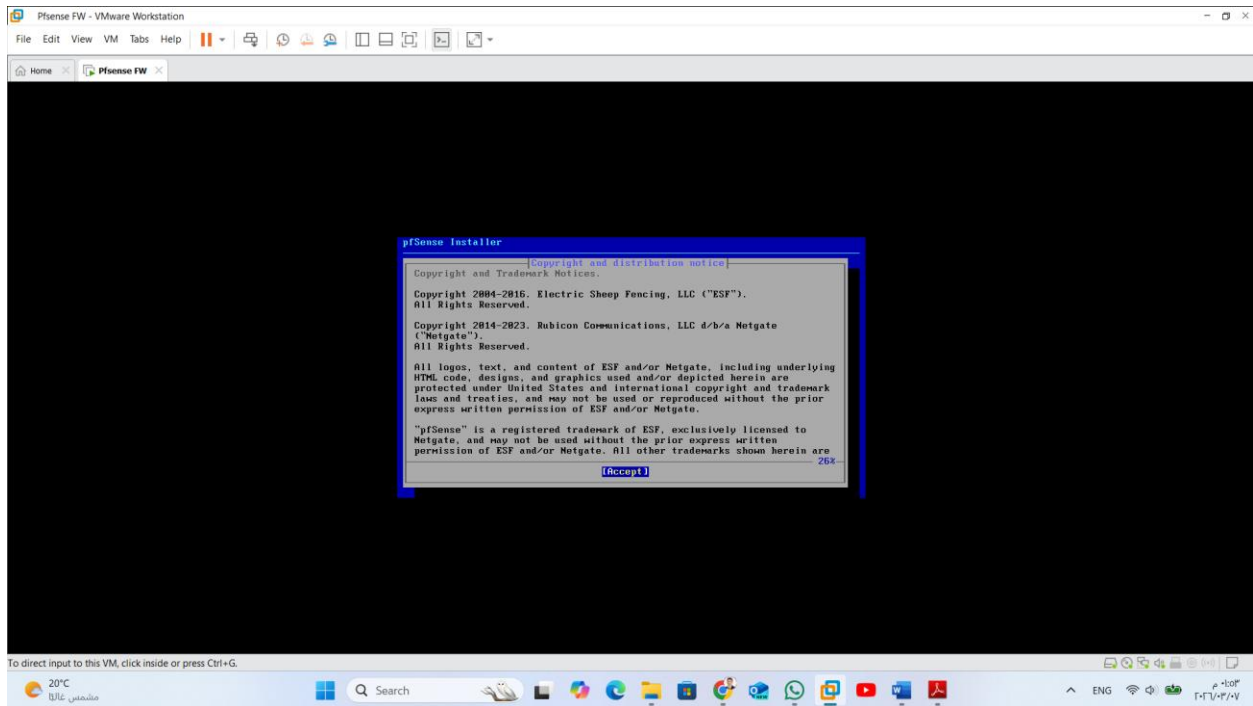
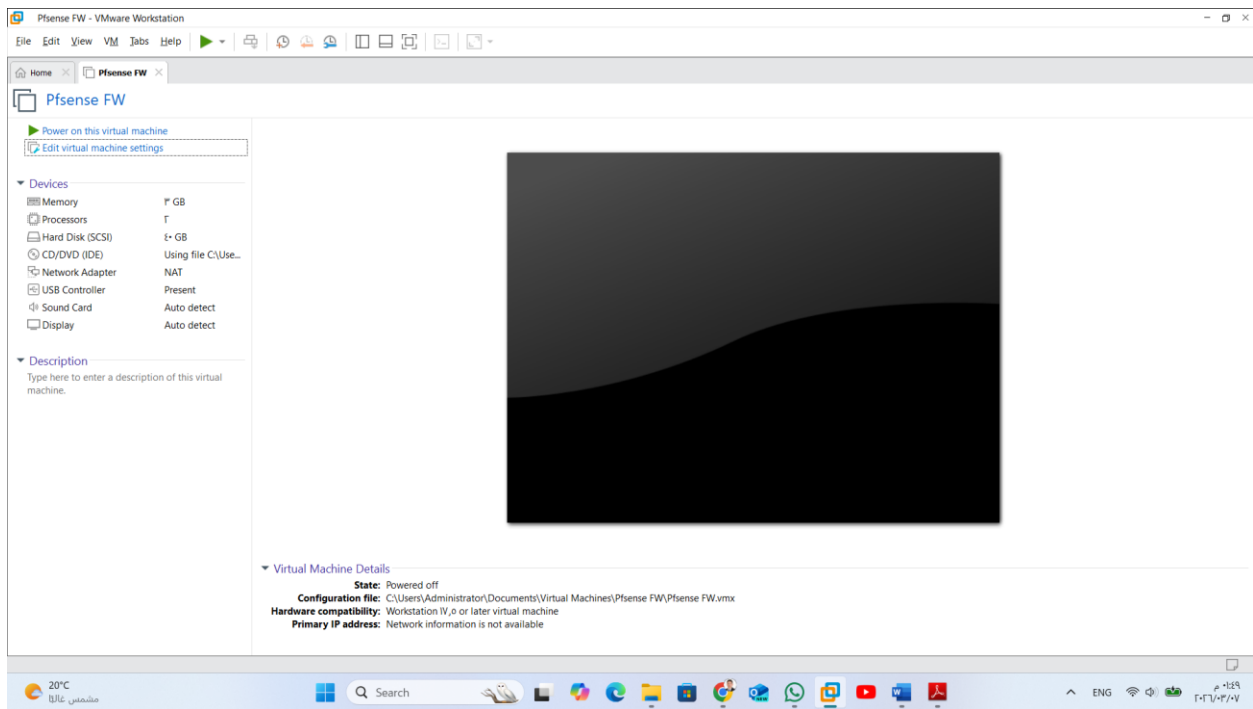


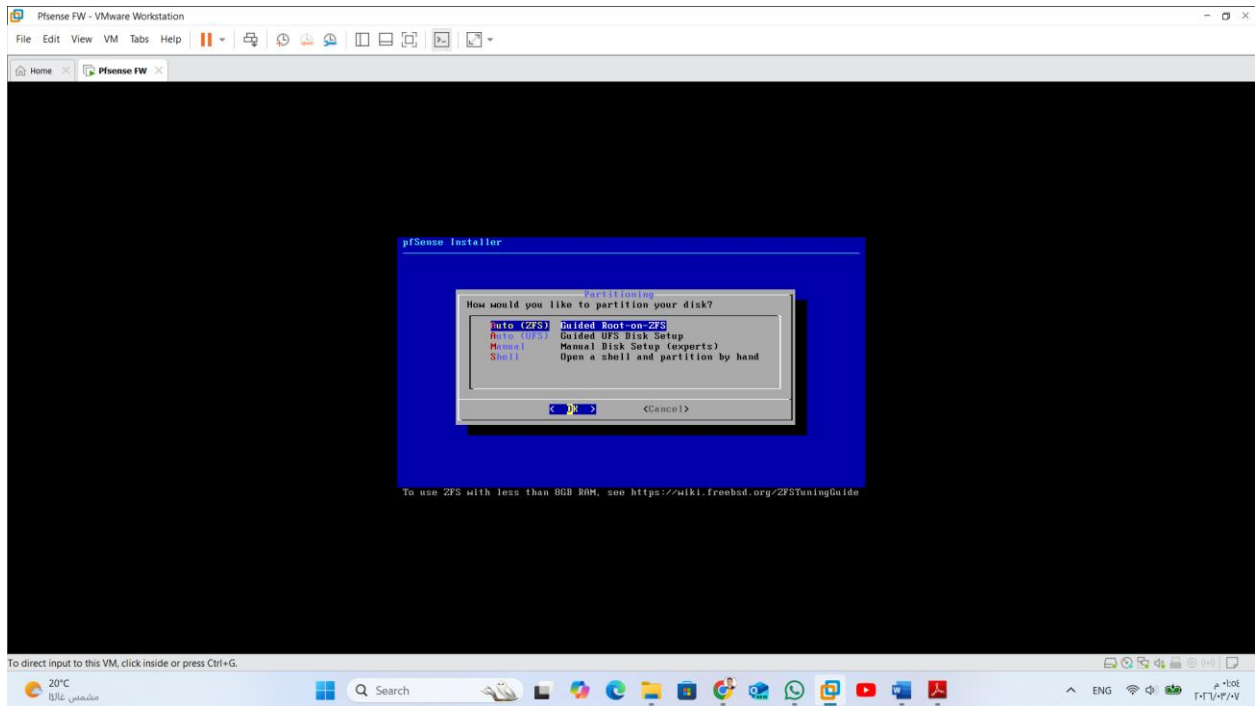
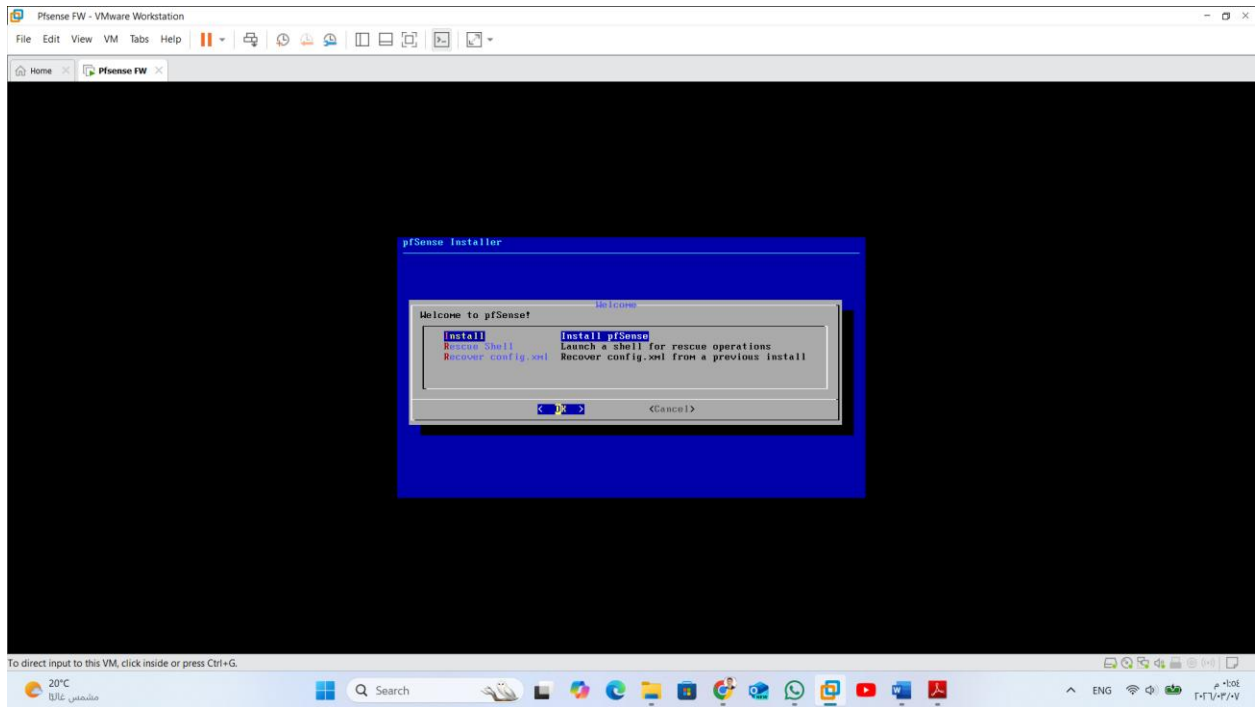


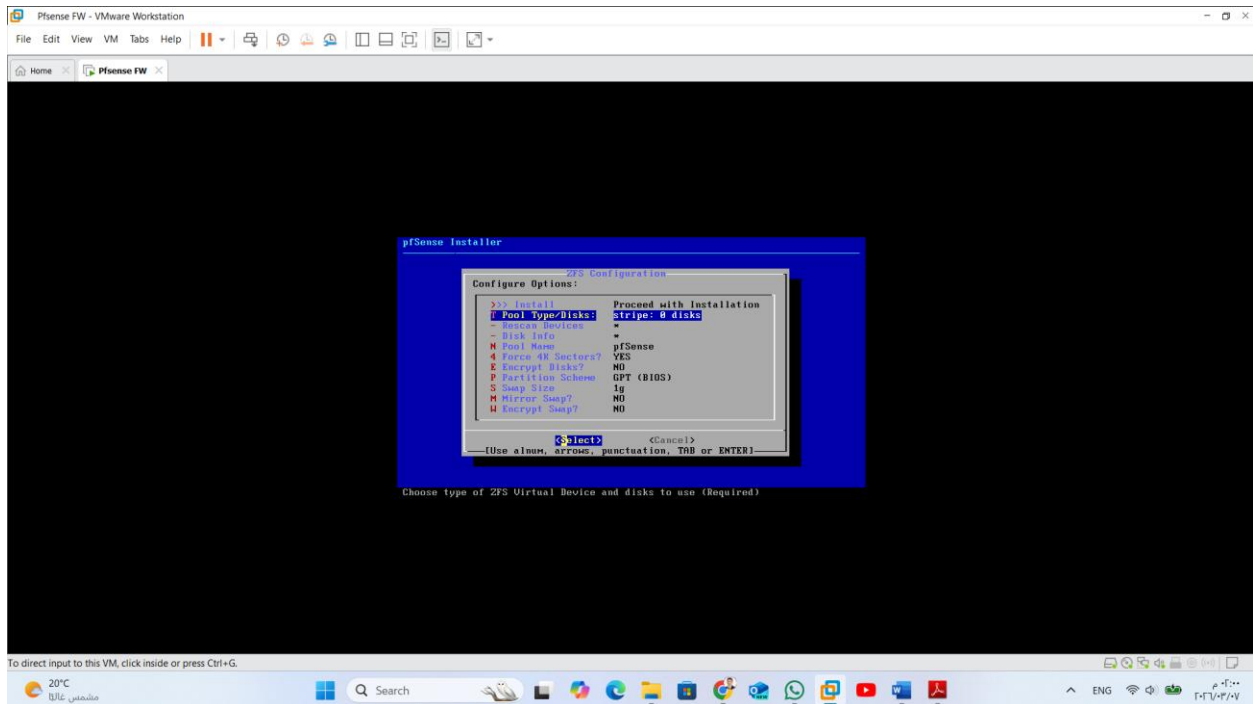
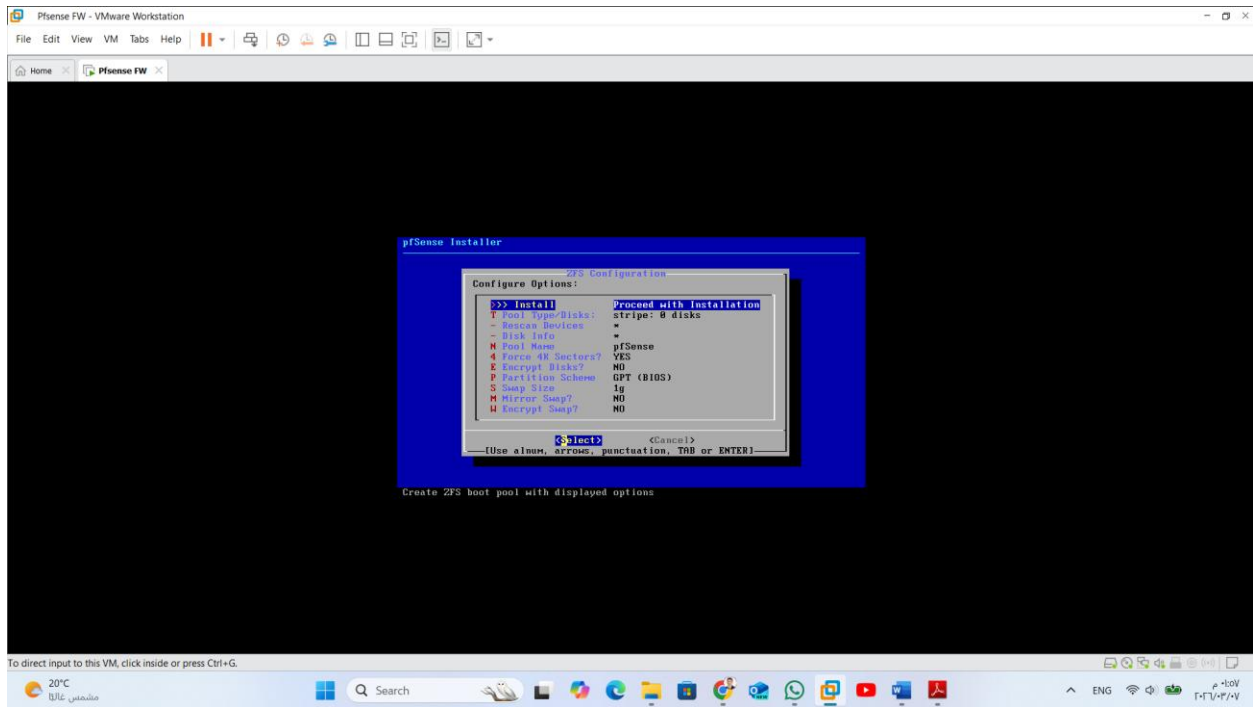


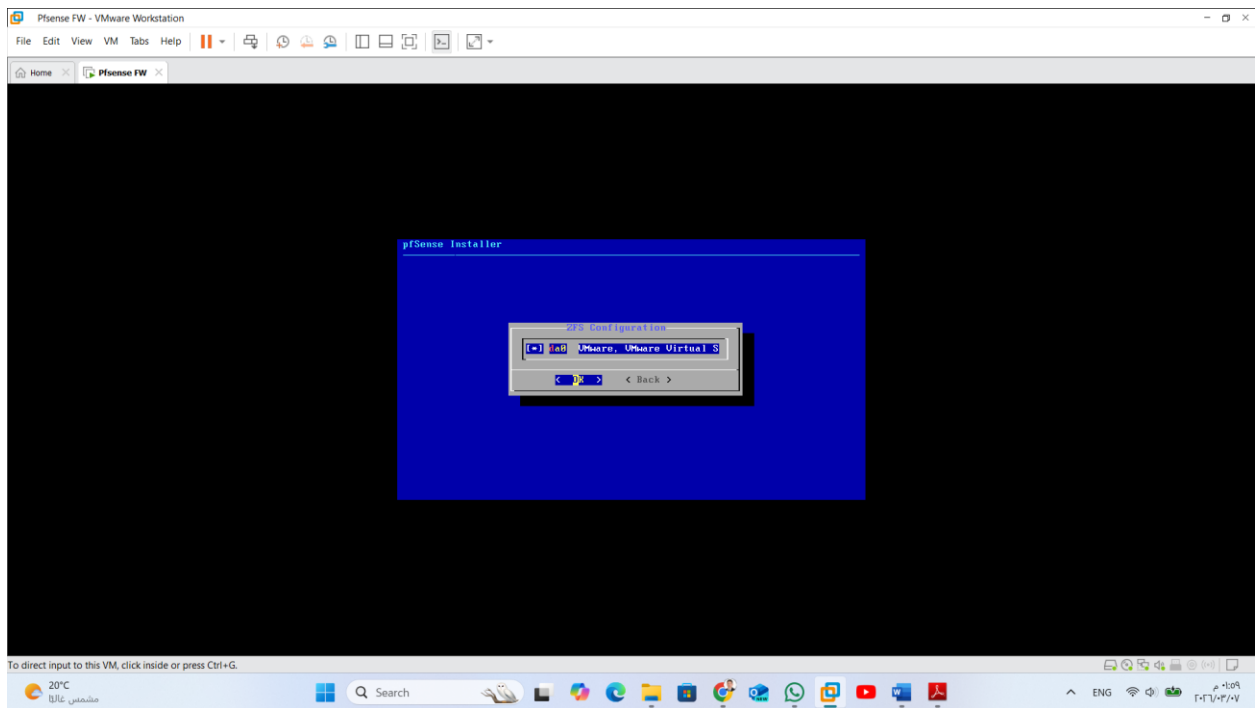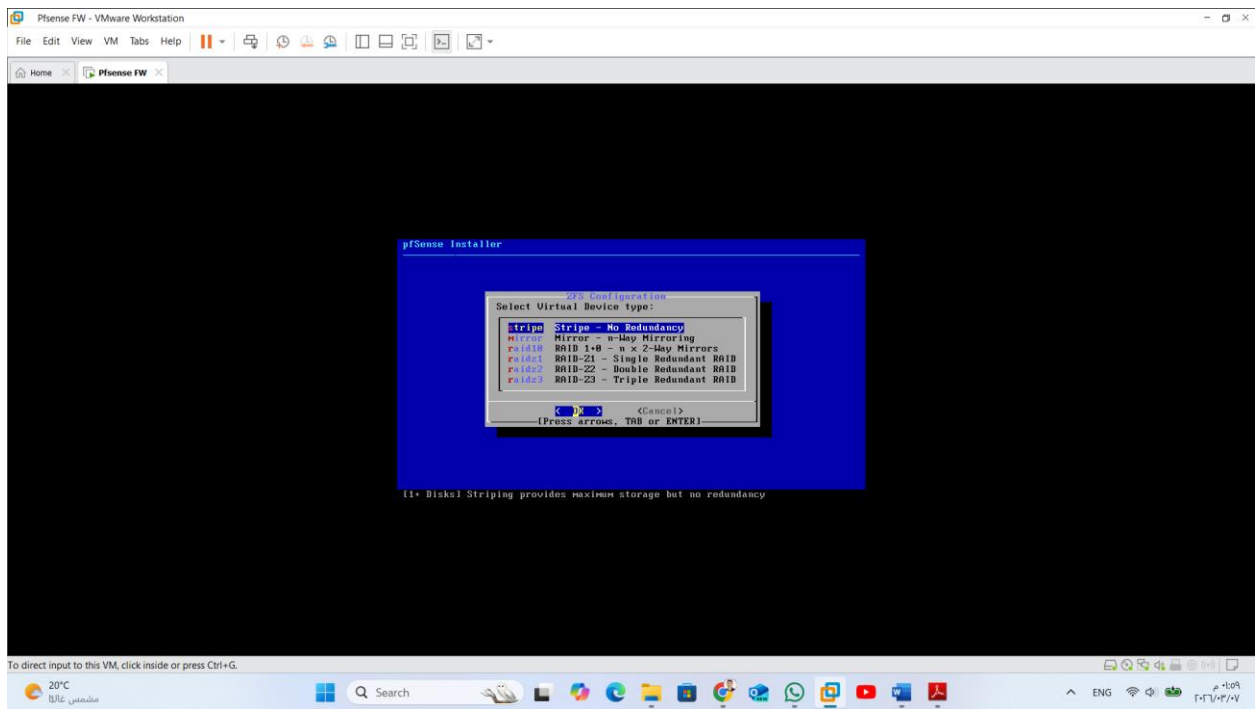

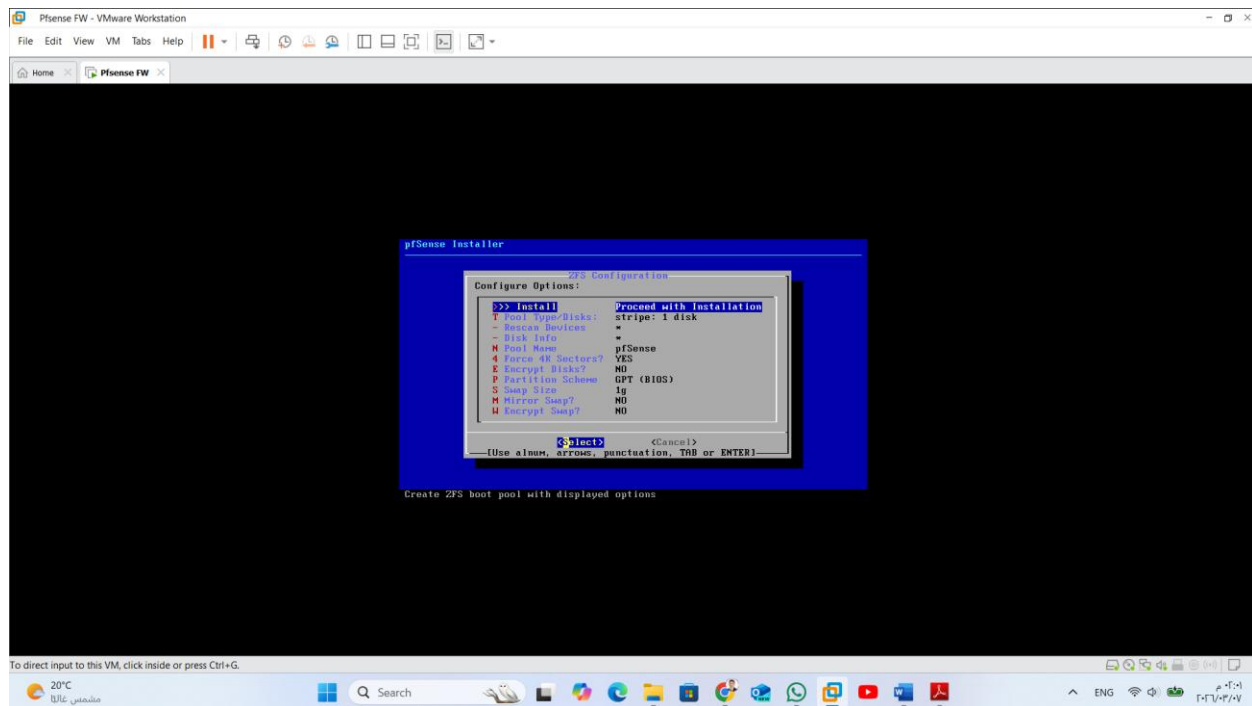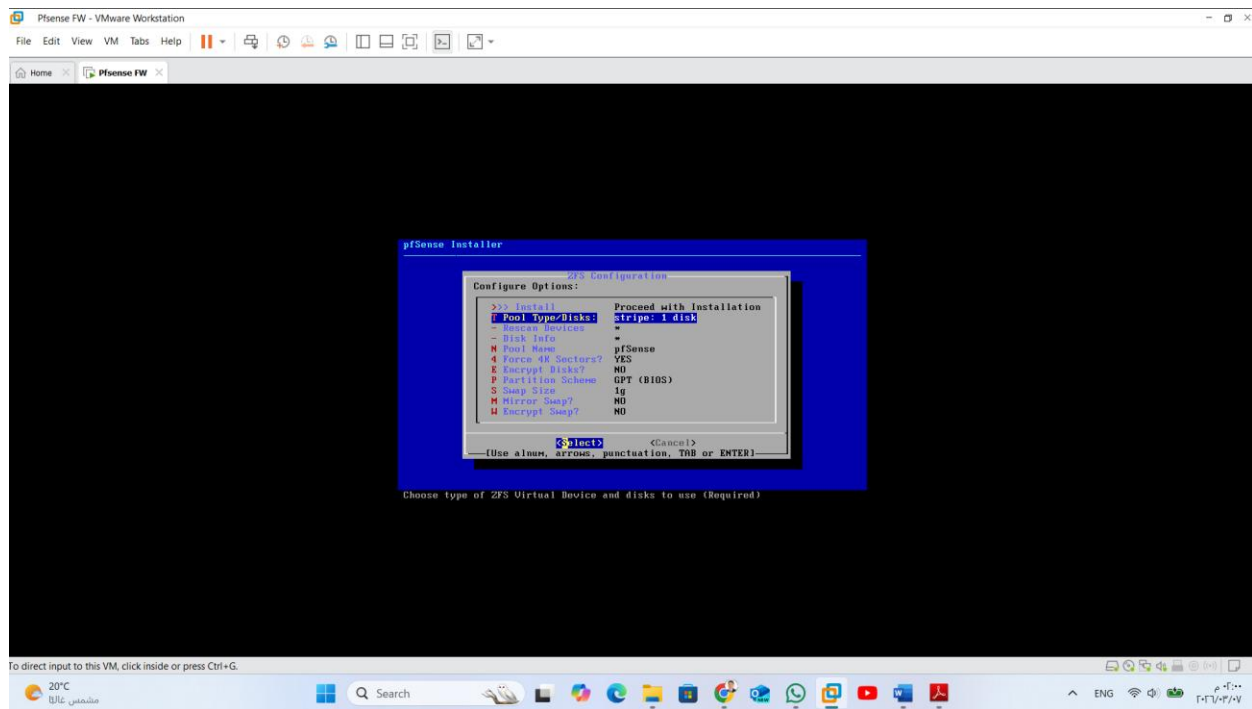

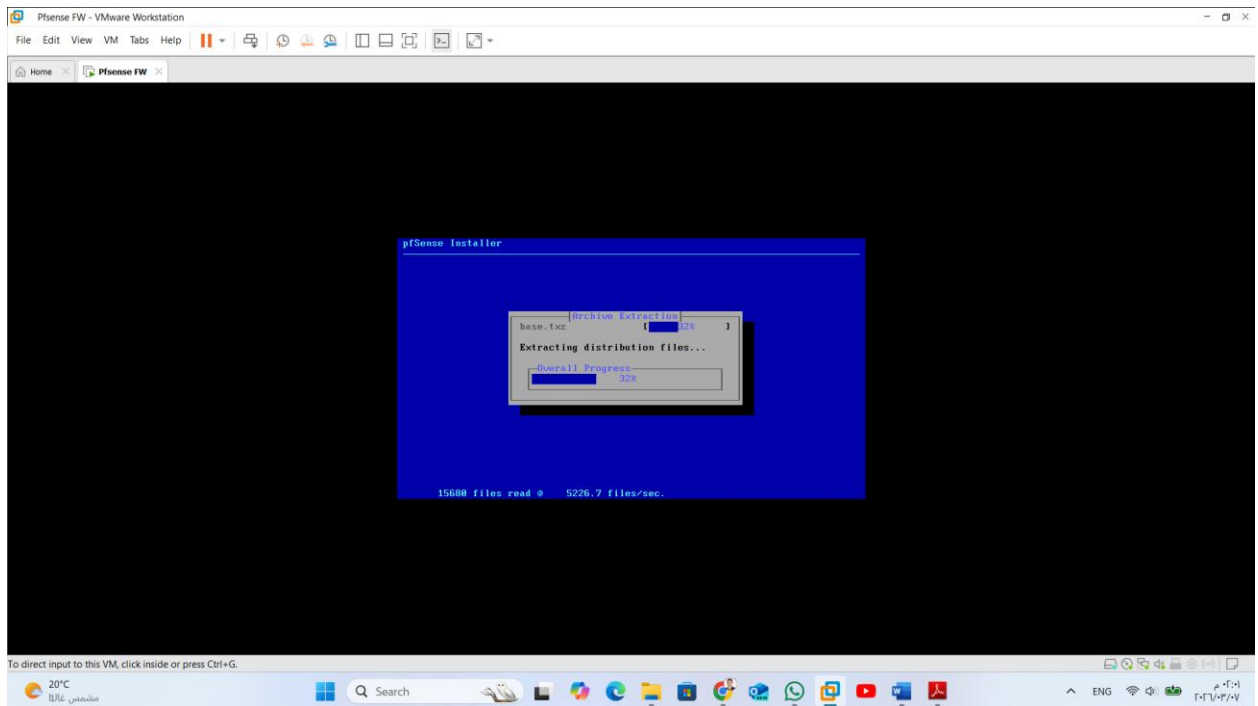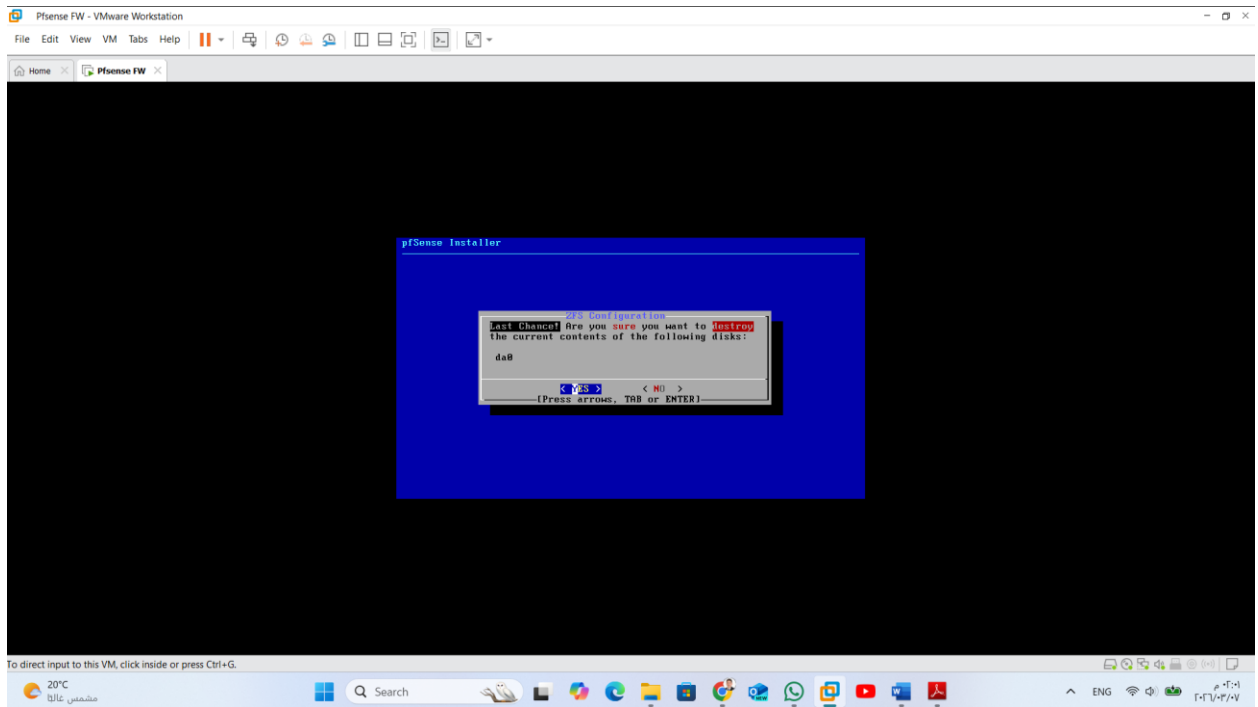

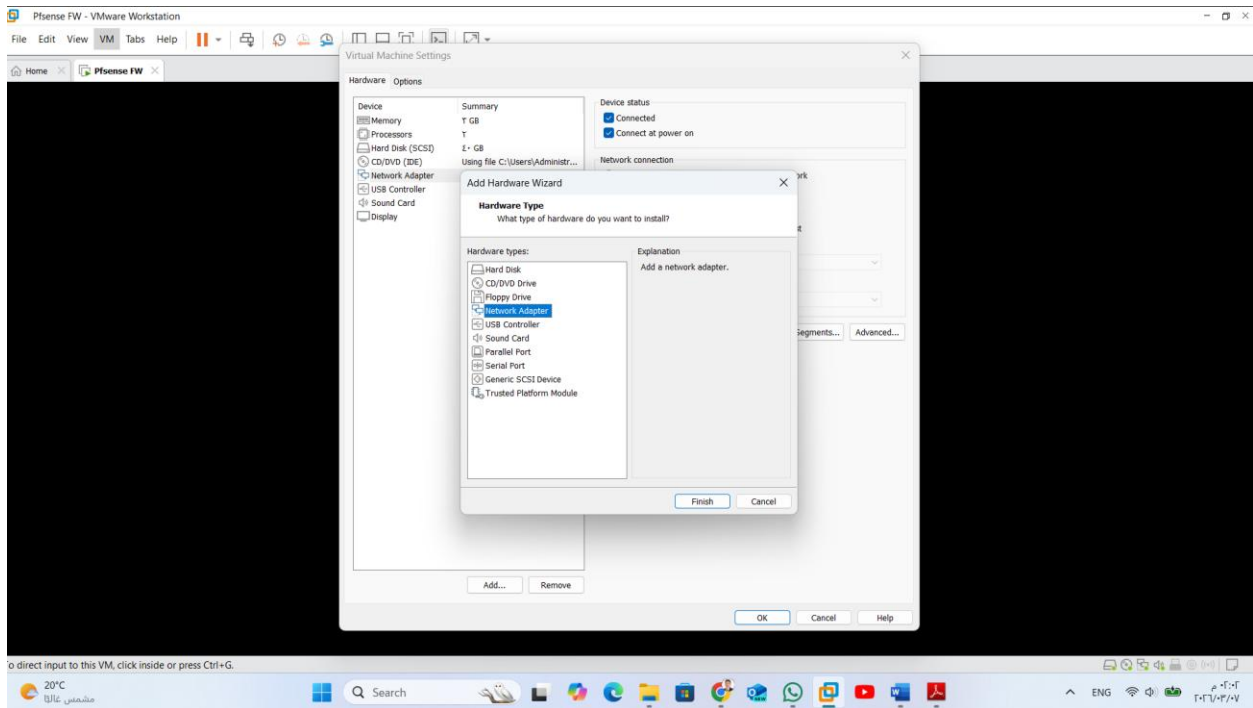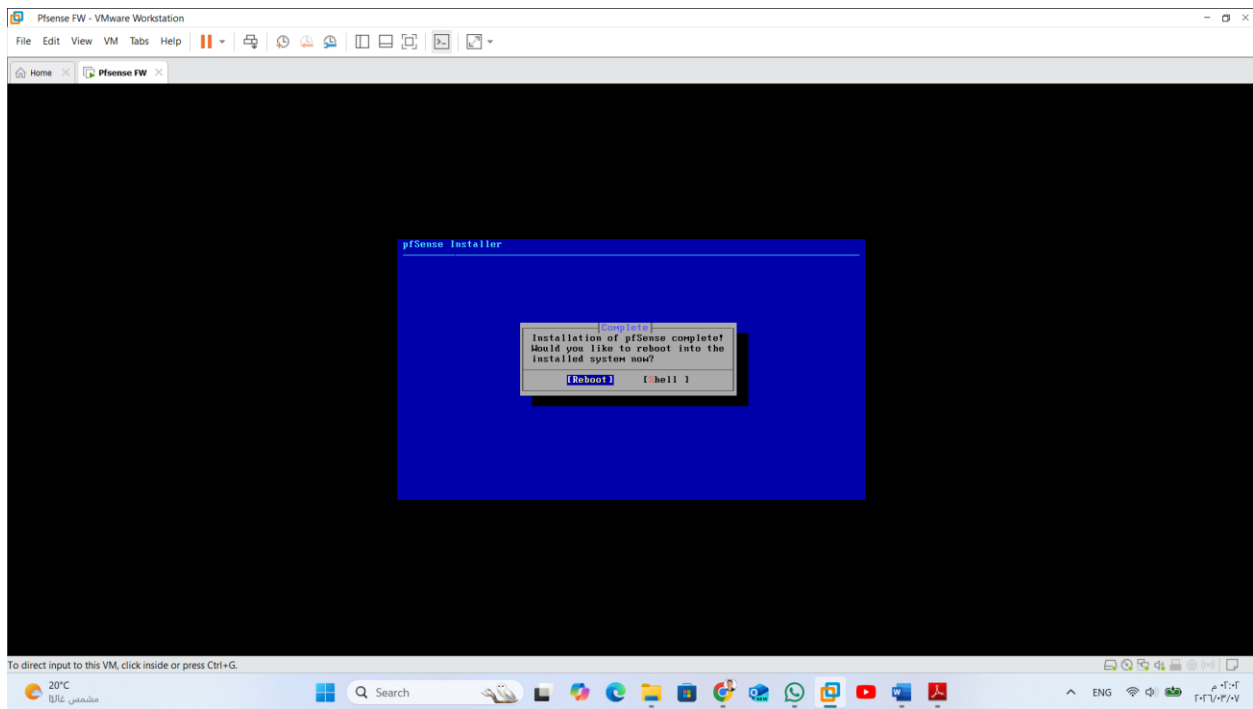

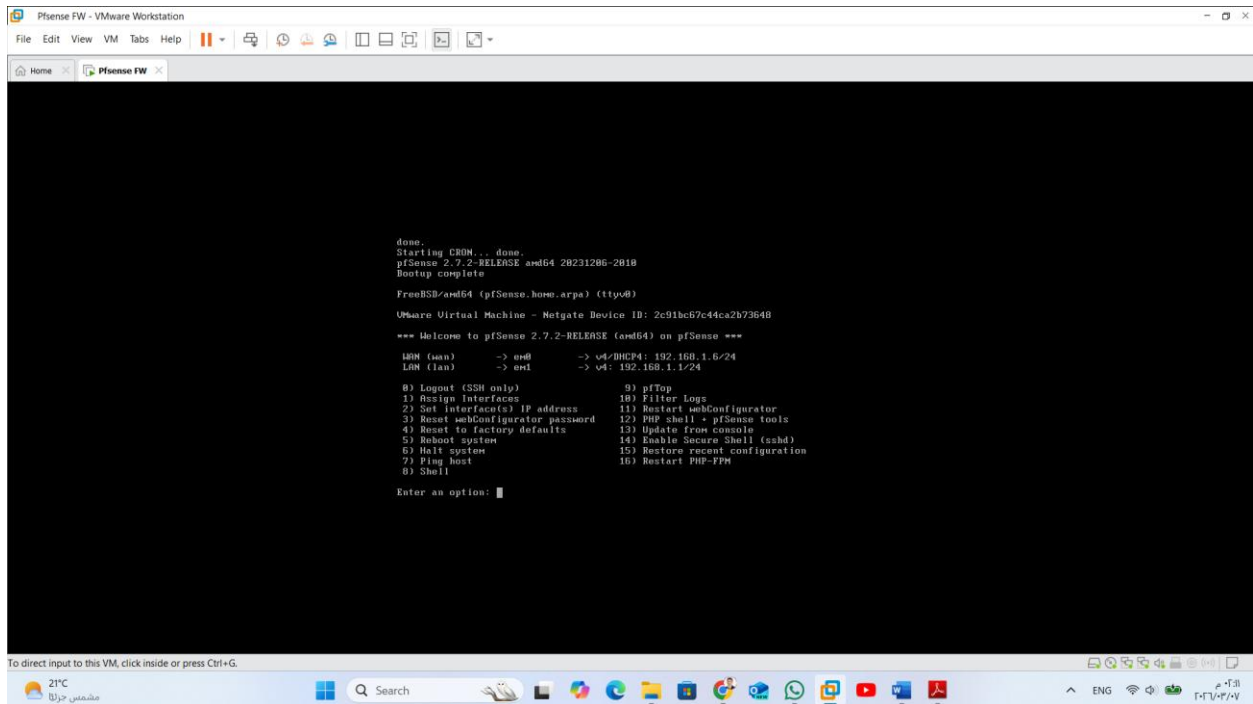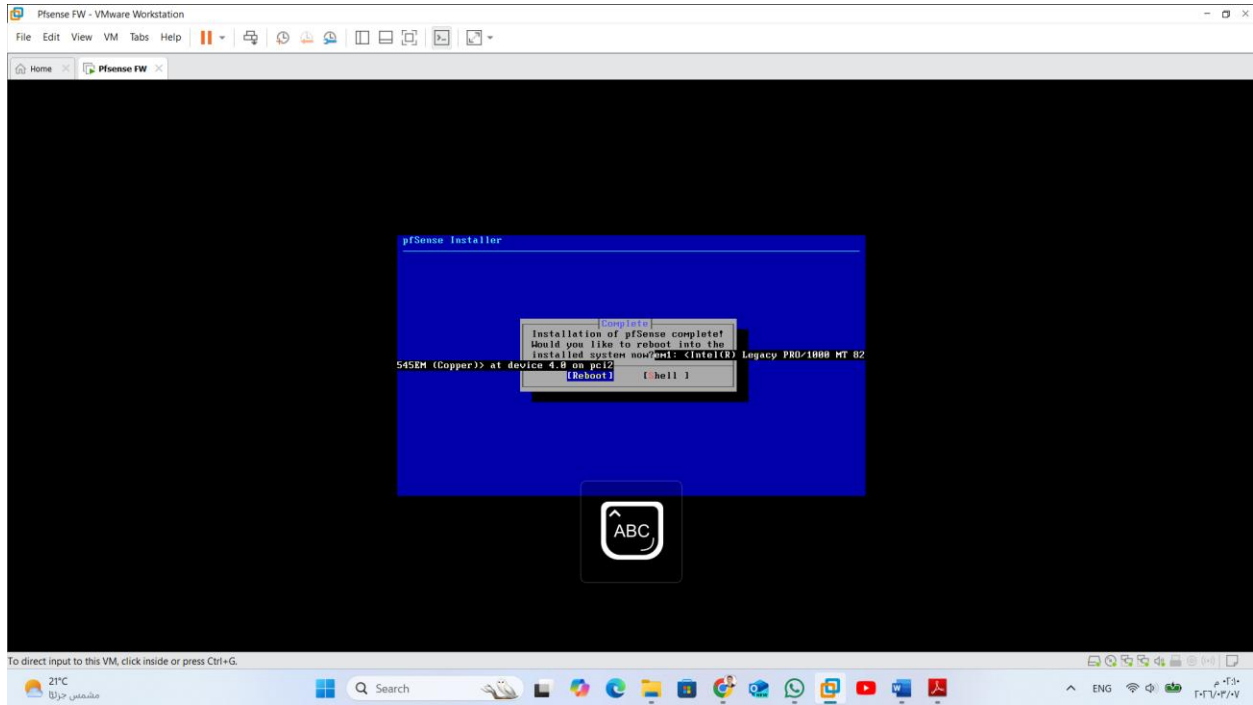

لإضافة pfSense كمشروع جدار حماية (Firewall) في بيئة الـ SOC ، يجب إعداده ليكون "البوابة" (Gateway) التي تفصل بين شبكتك الداخلية (Lab) وشبكة الإنترنت (NAT)، مما يسمح بمراقبة وتحليل حركة المرور الصادرة والواردة.

الخطوات التفصيلية لضبط الإعدادات لتناسب الأجهزة الحالية:

أولاً: إعدادات الشبكة في (VMware Network Topology)

لجعل pfSense يتحكم في المرور، يجب أن يمتلك كارتتي شبكة (Two Network Adapters):

١. WAN Interface: يتم ضبطه على NAT (ليحصل على إنترنت).

٢. LAN Interface: يتم ضبطه على Custom (VMnet) (مثلاً VMnet2)، وهذا سيكون "الشبكة الداخلية" التي ستتصل بها باقي الأجهزة.

ثانياً: تغيير إعدادات الأجهزة الحالية

بعد تشغيل pfSense، يجب تعديل إعدادات كروت الشبكة للأجهزة الأخرى (Windows Server, Win10, Ubuntu) لتصبح كالتالي:

- Network Adapter: قم بتغييره من NAT إلى نفس الـ Custom (VMnet) الذي اخترته للـ LAN في pfSense.
- Default Gateway (DGW): تغييره إلى ١٩٢, ١٦٨, ٢٥٤, ٢ IP الخاص بـ pfSense LAN.

ثالثاً: جدول الإعدادات المقترح لبيئة الـ SOC

بناءً على ملف الإعدادات، يفضل ضبط pfSense كالتالي لضمان استقرار الخدمة:

الجهاز / الإعداد القيمة المقترحة الملاحظات

192.168.254.2 pfSense LAN IP سيكون هو الـ Gateway الجديد لكل الأجهزة.

192.168.254.140 DNS Forwarder توجيه طلبات الـ DNS إلى TEAM4-DC أولاً لضمان عمل الـ Domain.



Firewall Rules Allow All (مؤقتاً) للسماح للأجهزة بالوصول للإنترنت قبل بدء تجارب الحجب.

رابعاً: تكامل pfSense مع الـ SOC (الخطوة الأهم)

بما أننا نستخدم Splunk، الاستفادة من pfSense في الآتي:

١. Syslog Forwarding: ضبط pfSense لإرسال سجلات الحماية (Firewall Logs) إلى جهاز الـ Ubuntu (IP: ١٥٦, ٢٥٤, ١٦٨, ١٩٢) ليتم تحليلها داخل Splunk.

٢. Suricata/Snort: يمكن تثبيت إضافة Suricata داخل pfSense لتعمل كـ IDS/IPS، مما يمنحك تنبيهات حقيقية عن أي محاولات اختراق داخل الـ SOC.

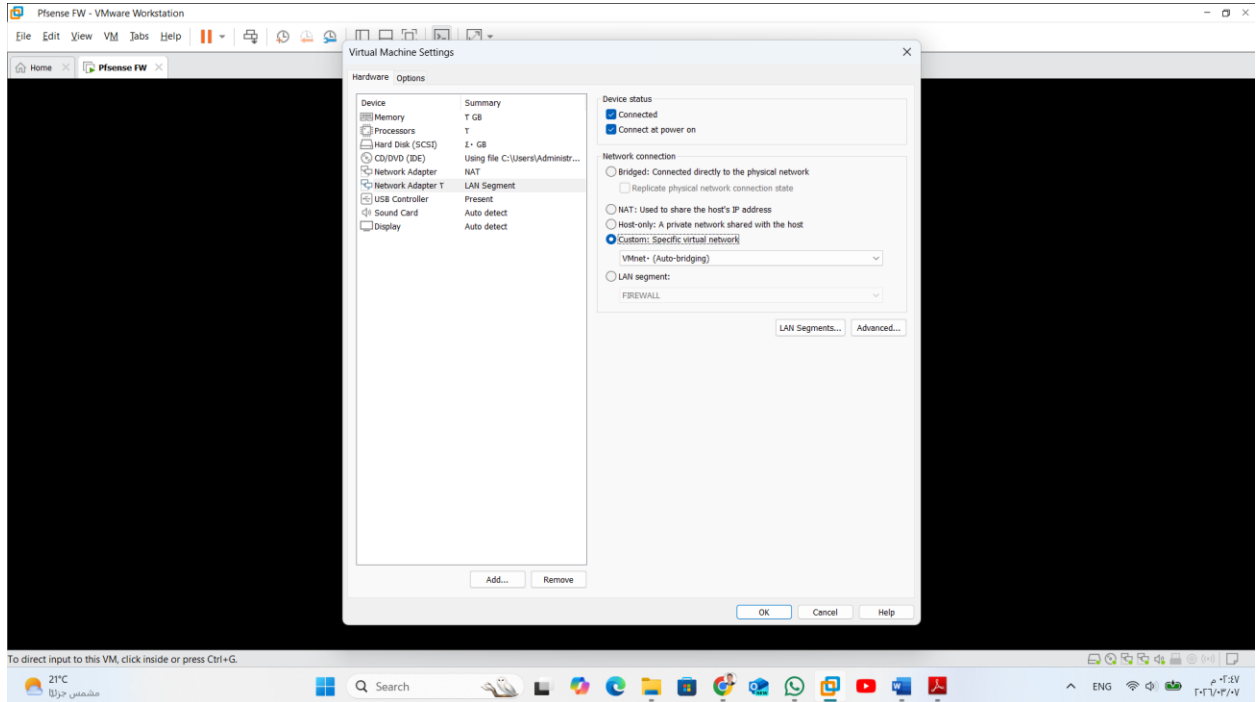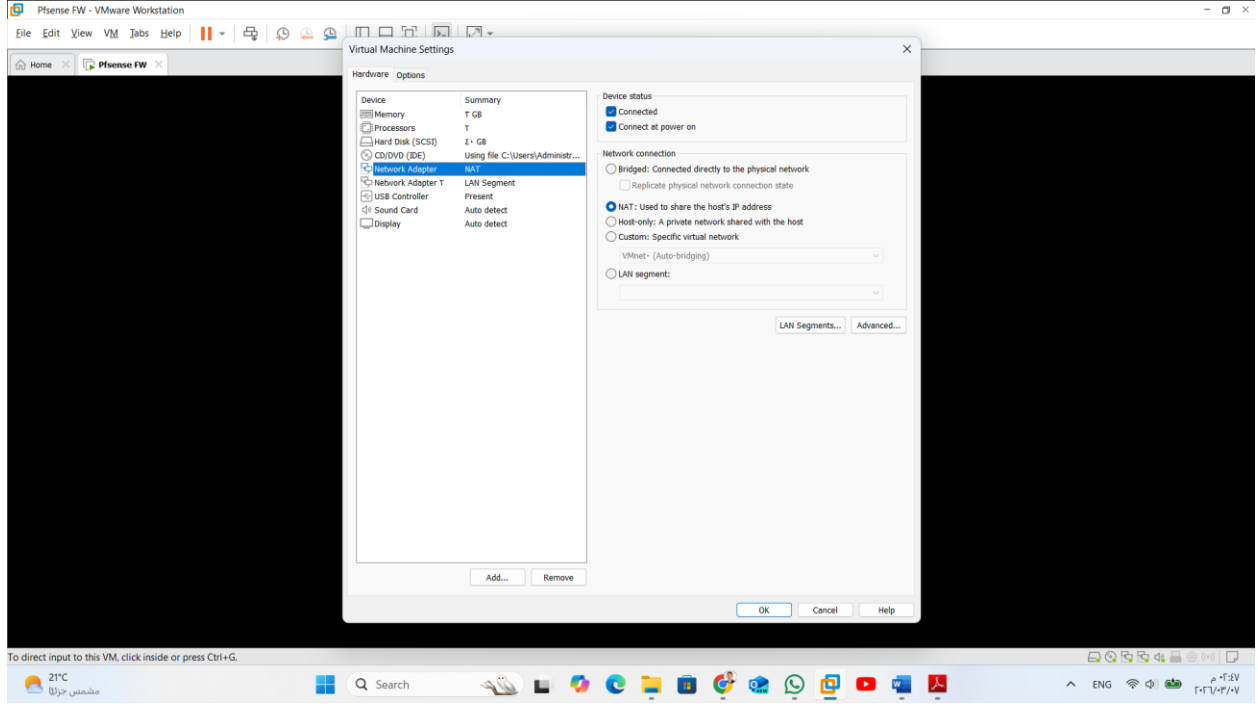

Psense FW - VMware Workstation

File Edit View VM Tabs Help

Library

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server 1-19
- Windows 10 x86 pc1
- kali-linux-1-to-1-vmware-amd64 for VAPT
- Windows Server 1-19 for XAMP and DVWA
- Psense FW

Virtual Network Editor

Name	Type	External Connection	Host Connection	DHCP	Subnet Address
VMnet0	NAT	Connected	Enabled	192.168.255.0	
VMnet1	Host-only	-	Connected	Enabled	192.168.255.0
VMnet8	Host-only	-	Connected	Enabled	192.168.255.0
VMnet9	Host-only	-	Connected	Enabled	192.168.255.0
VMnet10	Host-only	-	Connected	Enabled	192.168.255.0

VMnet Information

☐ Bridged (connect VMs directly to the external network)

☒ NAT (shared host's IP address with VMs)

☐ Host-only (connect VMs internally in a private network)

☒ Connect a host virtual adapter to this network

Host virtual adapter name: VMware Network Adapter VMnet8

☒ Use local DHCP service to distribute IP address to VMs

Subnet IP: 192.168.255.0 Subnet mask: 255.255.255.0

Restore Defaults Import... Export... OK Cancel Apply Help

psense 2.7.2-RELEASE amd64 20231206-2018
Bootup complete

FreeBSD/amd64 (pfSense.home.arp) (tty0)

VMware Virtual Machine - Netgate Device ID: 140511d0261ff27bb94a

*** Welcome to pfSense 2.7.2-RELEASE (amd64) on pfSense ***

LAN (lan) -> em0 -> v4/BHCP4: 192.168.255.129/24
v6/BHCP6: fd15:4ba5:5a2b:1000:2bc:29ff:fe2f:b1

LAN (lan) -> em1 -> v4/BHCP4: 192.168.254.129/24

0) Logout (SSH only) 9) pTop
1) Assign interfaces 10) Filter Logs
2) Set interface(s) IP address 11) Restart webConfigurator
3) Reset webConfigurator password 12) PHP shell - pfSense tools
4) Reset to factory defaults 13) Update from console
5) Reboot system 14) Enable Secure Shell (sshd)
6) Halt system 15) Restore recent configuration
7) Ping host 16) Restart PHP-FPM
8) Shell

Enter an option: 0

To direct input to this VM, click inside or press Ctrl+G.

kali-linux-1-to-1-vmware-amd64 for VAPT - VMware Workstation

File Edit View VM Tabs Help

Library

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server 1-19
- Windows 10 x86 pc1
- kali-linux-1-to-1-vmware-amd64 for VAPT
- Windows Server 1-19 for XAMP and DVWA
- Psense FW

Session Actions Edit View Help

kali@kali:~\$ ifconfig

```
docker0: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
    inet 172.17.0.1 netmask 255.255.0.0 broadcast 172.17.255.255
    ether 02:42:1c:4f:94:28 txqueuelen 0 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 3 overruns 0 carrier 0 collisions 0

eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.255.129 netmask 255.255.255.0 broadcast 192.168.255.255
    inet6 fd15:4ba5:5a2b:1000:fd15:35dc:c4f1:39d3 prefixlen 64 scopeid 0<global>
    inet6 fe80::7ac1c8b:8b3a:f75 prefixlen 64 scopeid 0<2c:link>
    ether 8a:9c:29:9f:2b:1f txqueuelen 1000 (Ethernet)
    RX packets 43 bytes 18304 (17.8 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 51 bytes 18335 (17.7 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0



lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0<localhost>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 88 bytes 6960 (6.7 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 88 bytes 6960 (6.7 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```



kali@kali:~\$ ping 192.168.255.129



```
PING 192.168.255.129 (192.168.255.129) 56(84) bytes of data:
^C
192.168.255.129 ping statistics:
 9 packets transmitted, 0 received, 100% packet loss, time 8176ms
```



kali@kali:~\$



To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

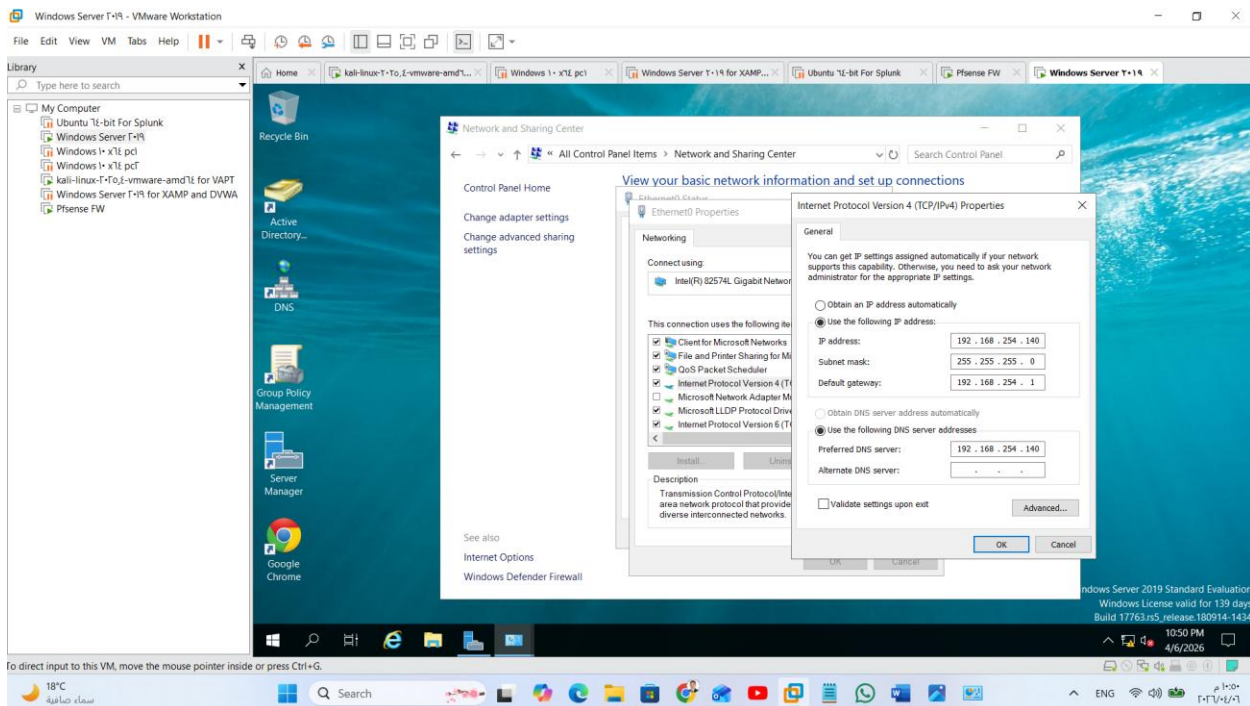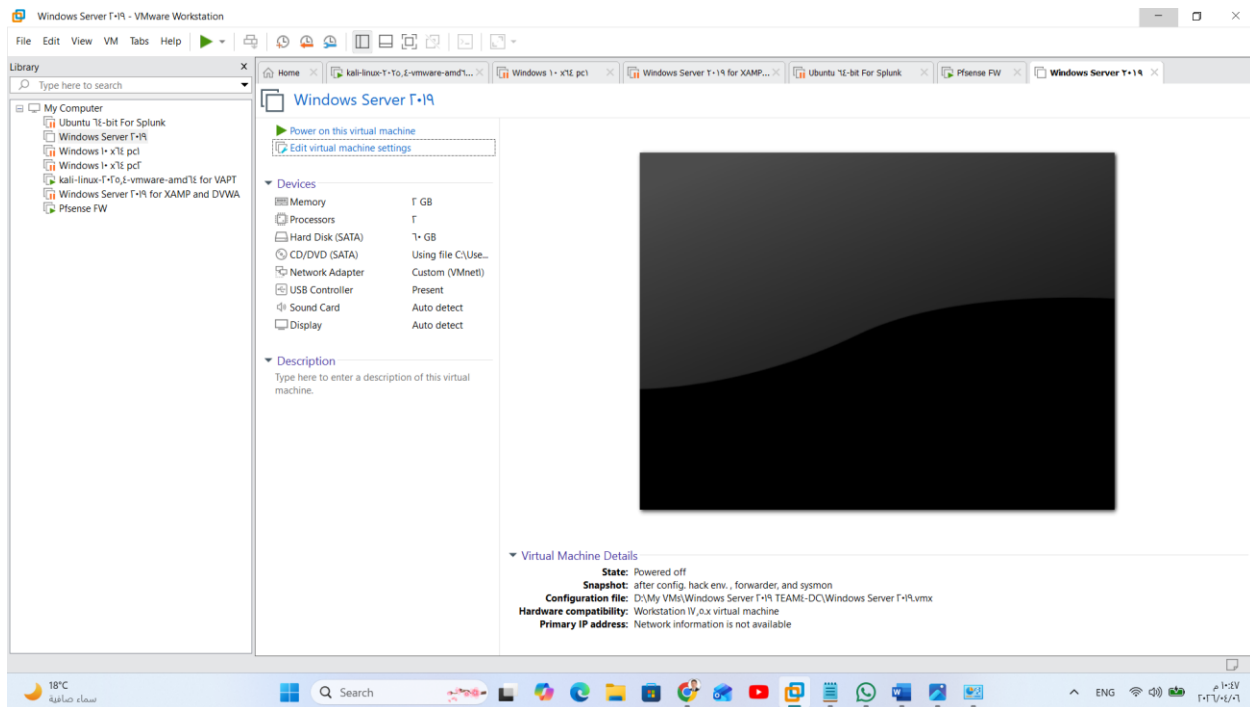

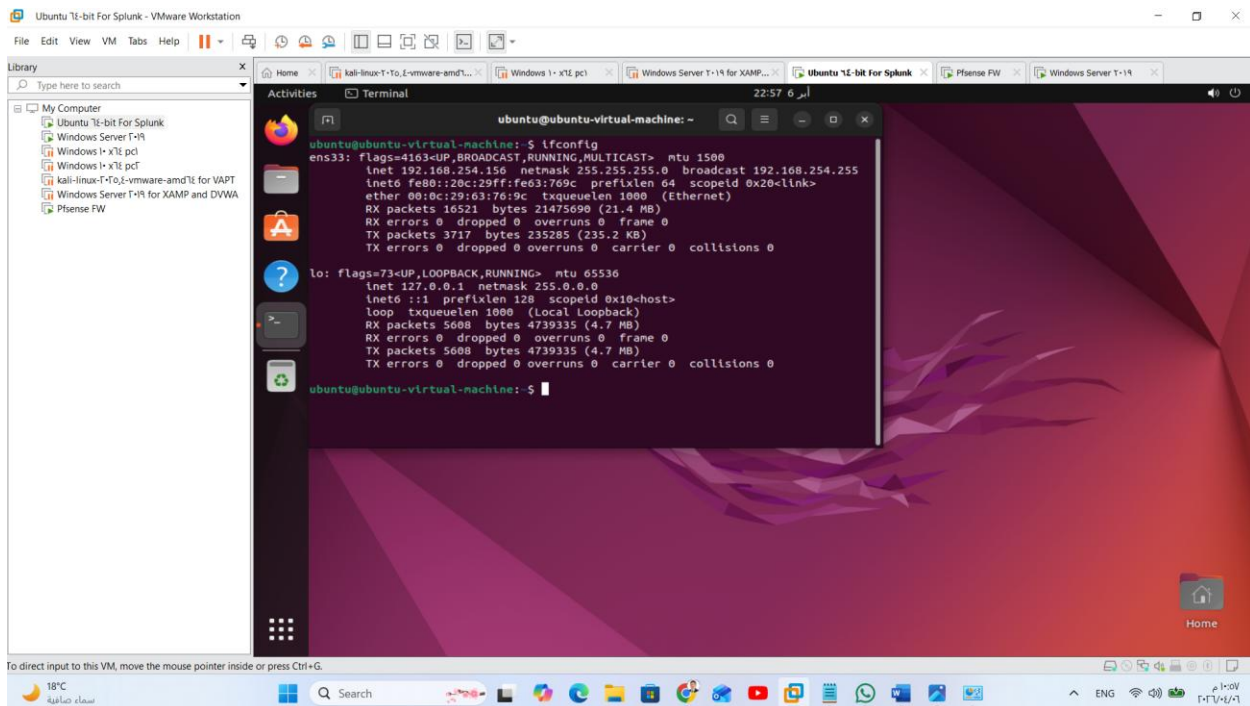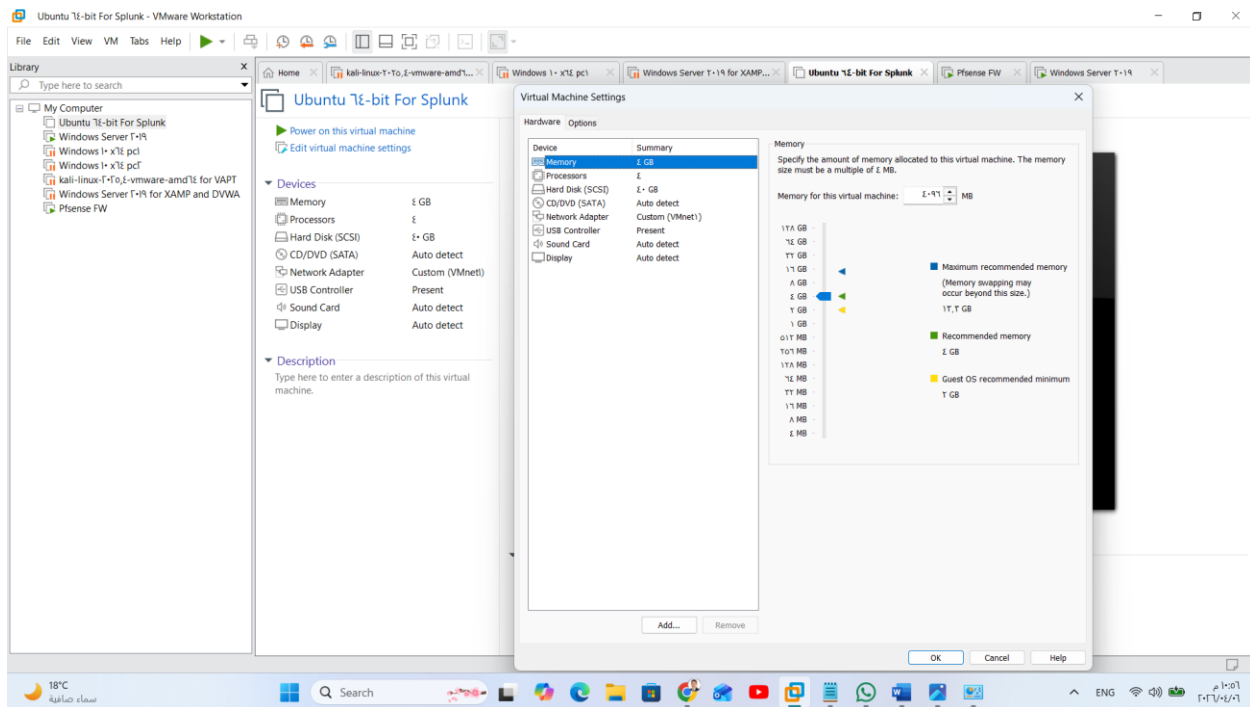


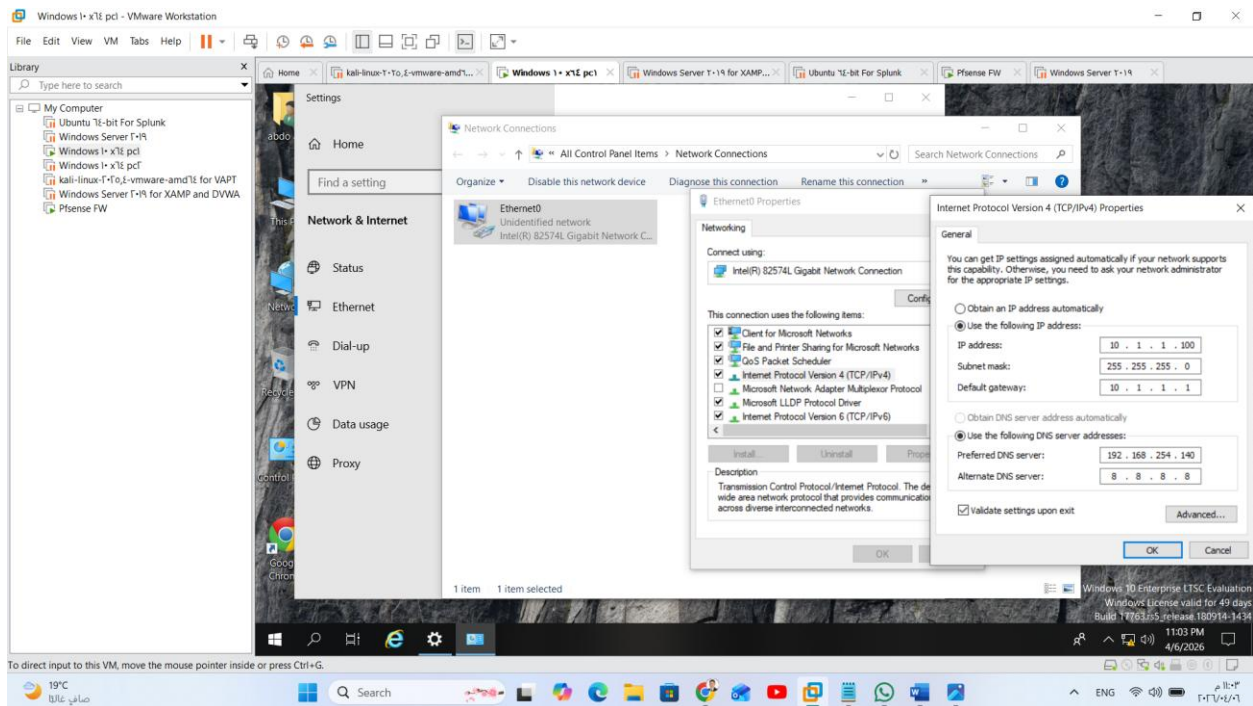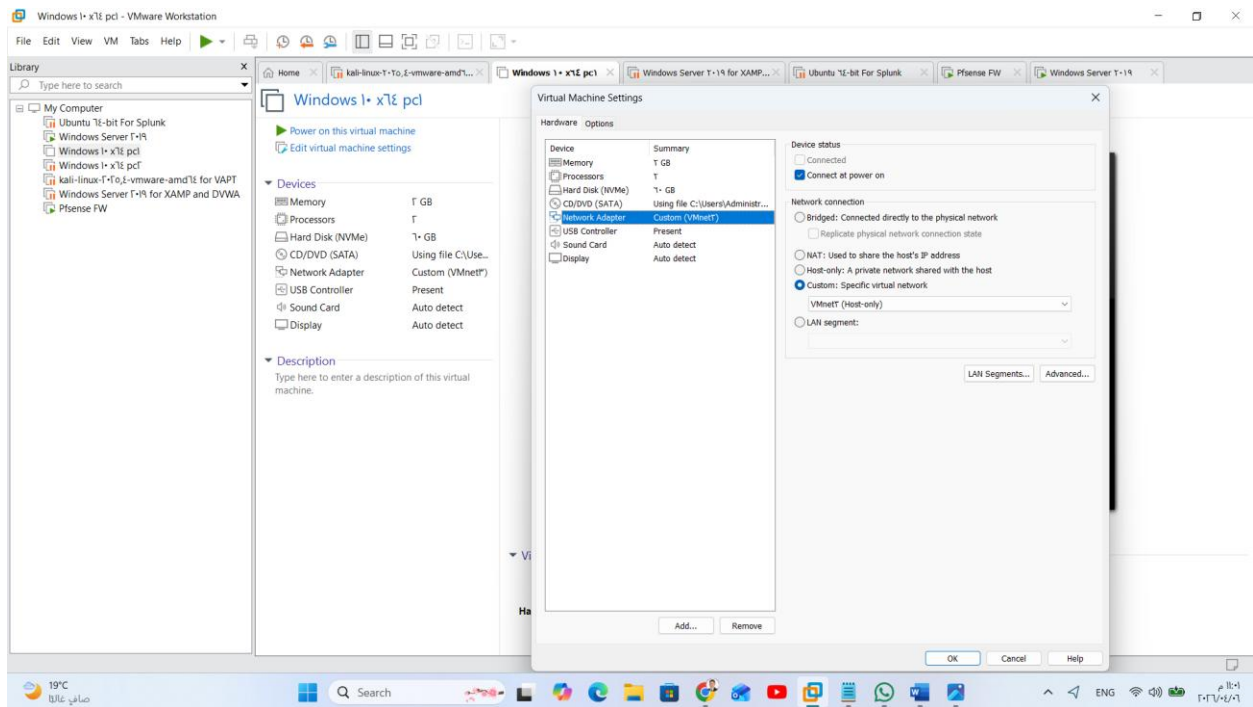

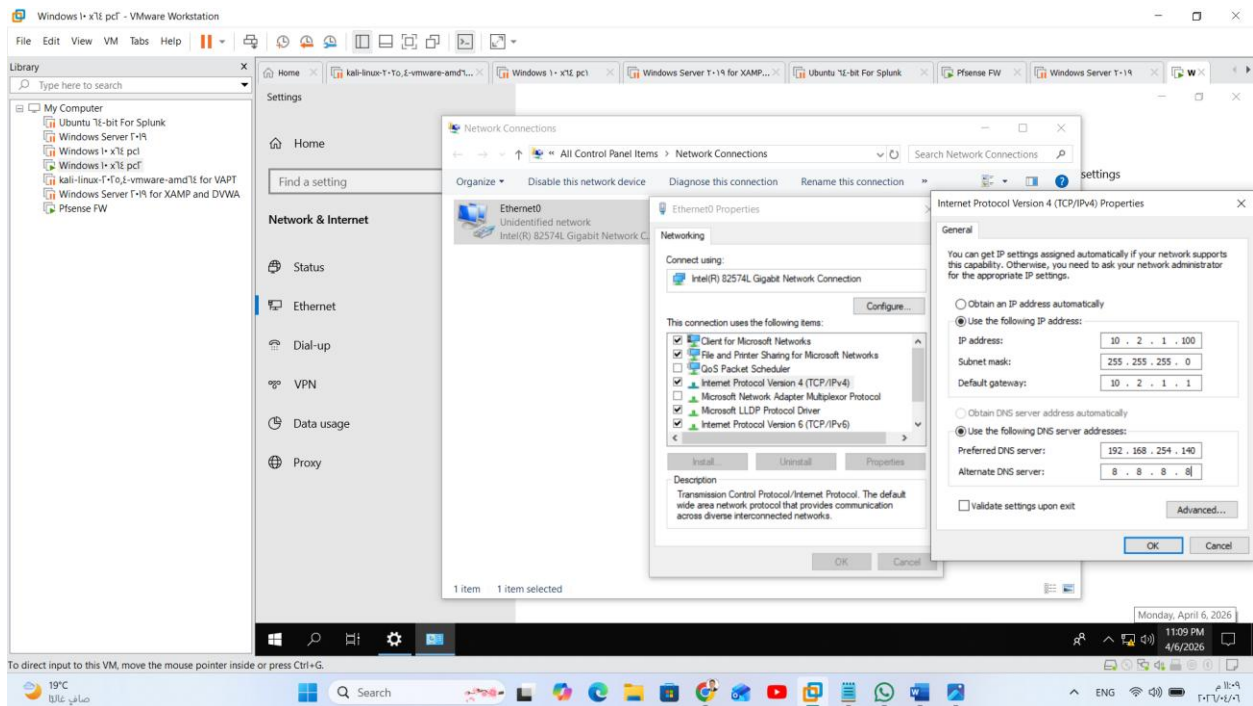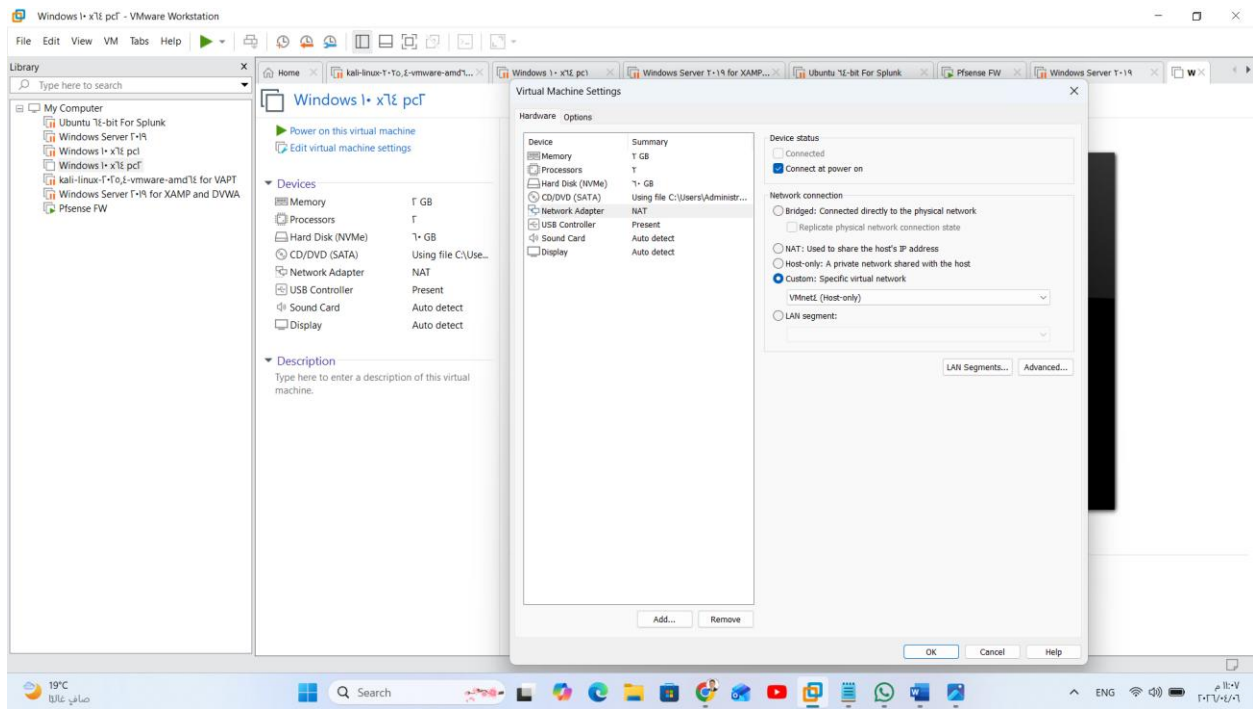


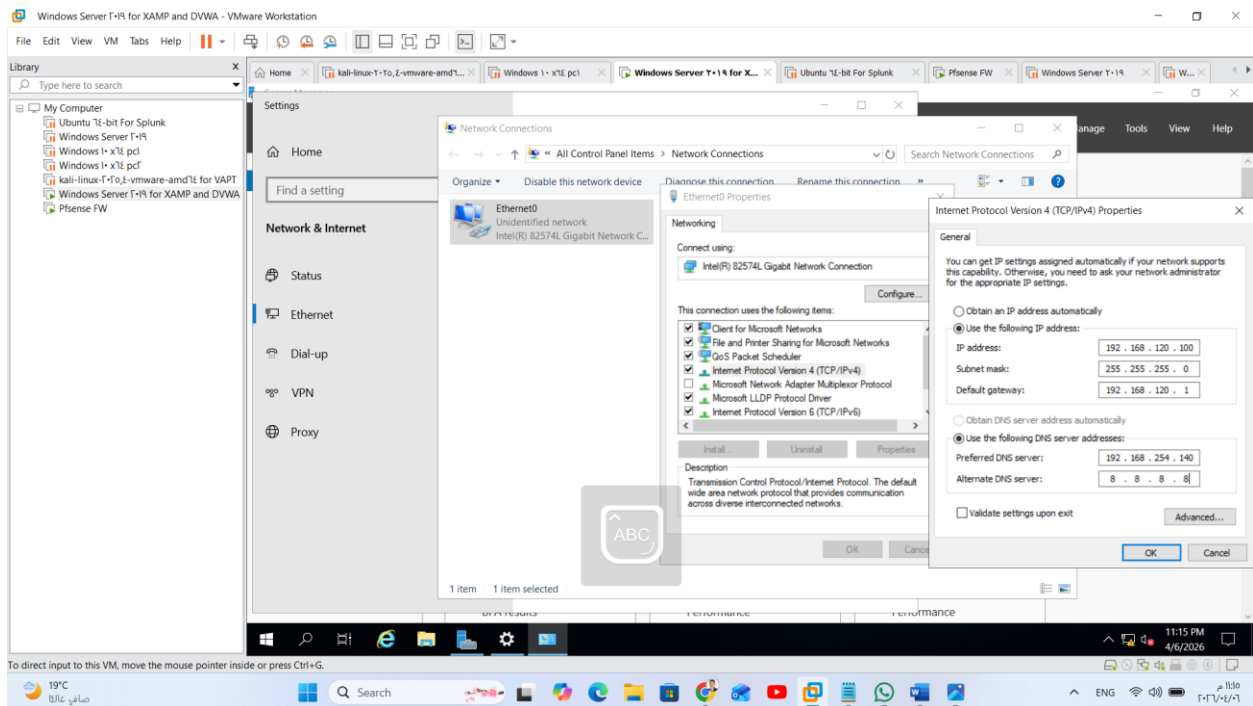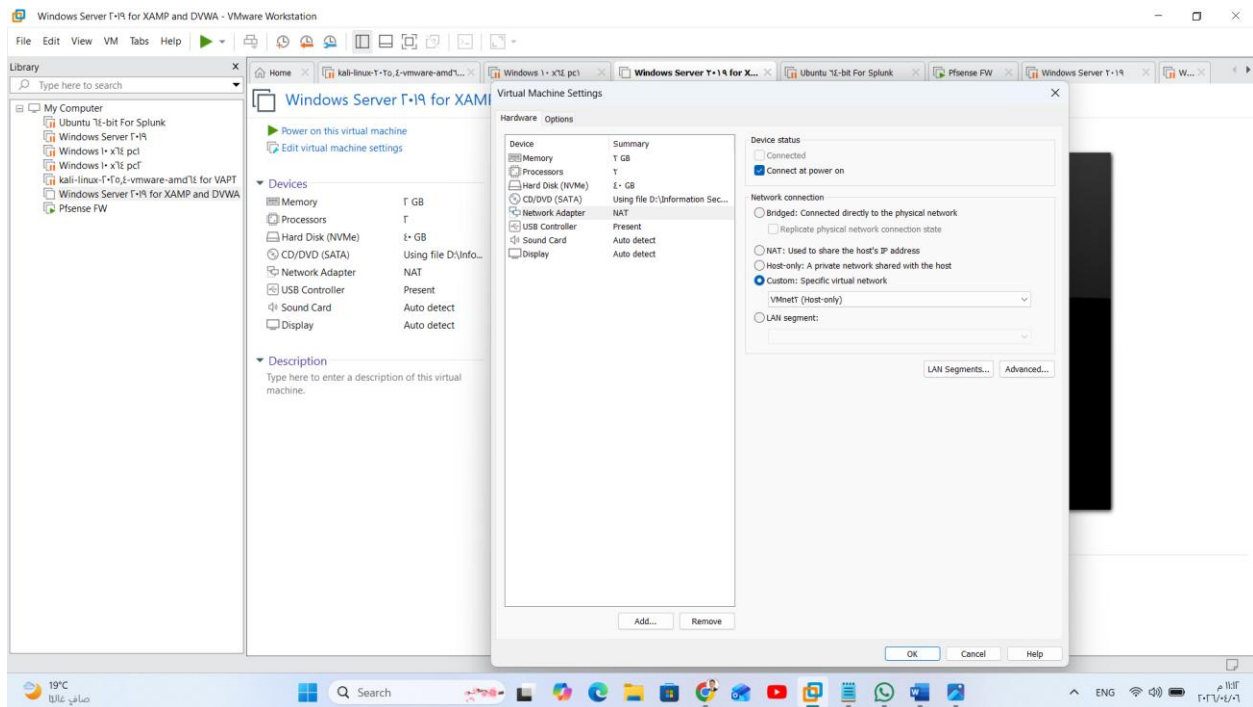

<http://192.168.254.129/>

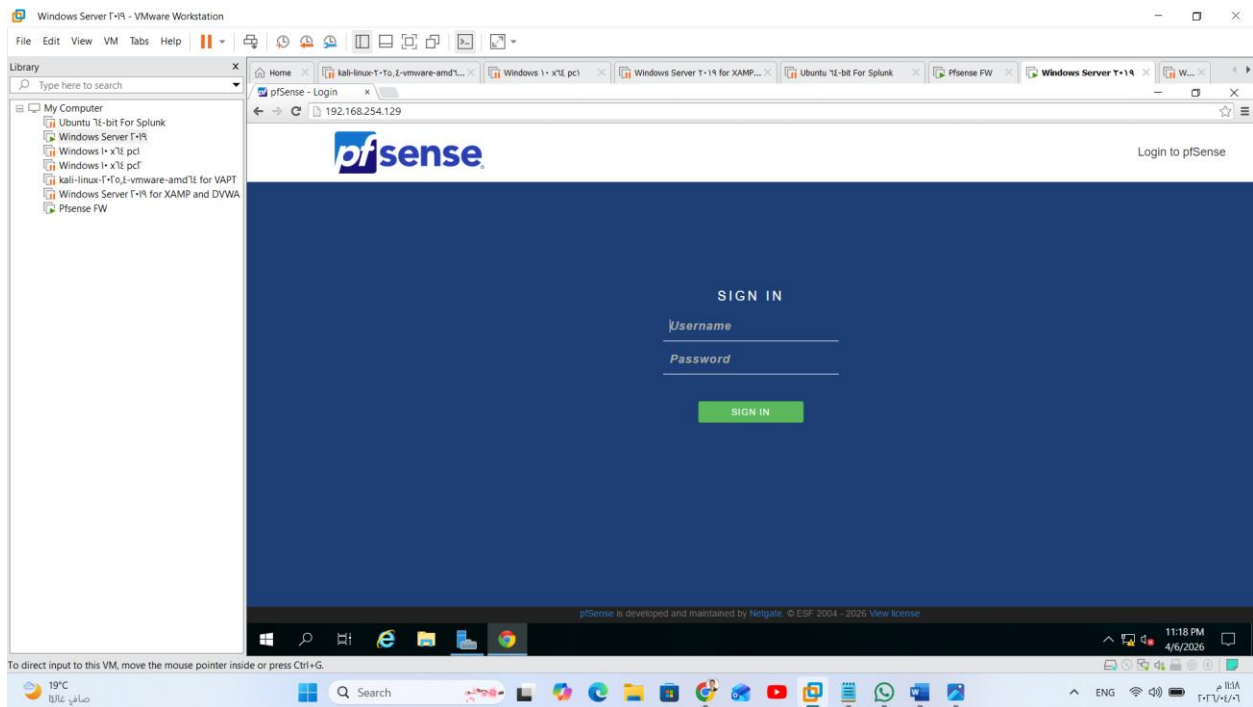

admin:pfSense

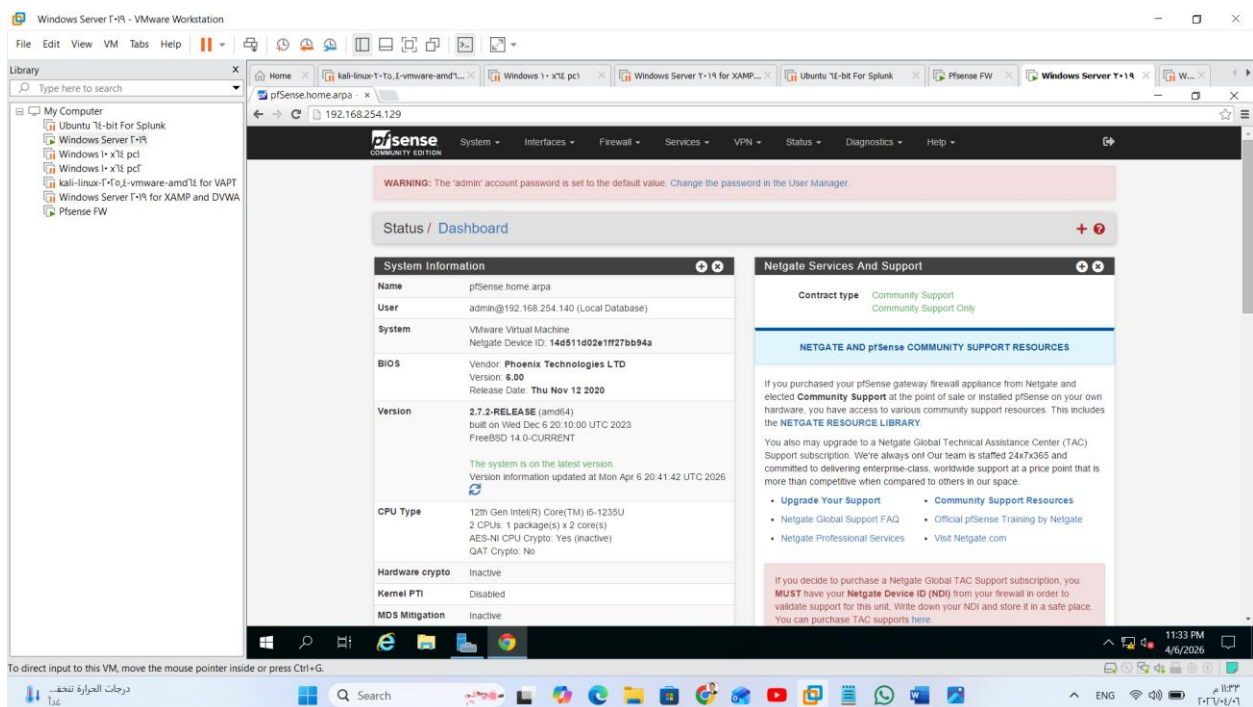

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x64 pc1
- kali-linux T-19 vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

Home

192.168.254.129/#

pfSense.home.arp

MDS Mitigation Inactive

Uptime 00 Hour 53 Minutes 40 Seconds

Current date/time Mon Apr 6 21:34:05 UTC 2026

DNS server(s)

- 127.0.0.1
- 192.168.250.2
- 192.168.254.1

Last config change Mon Apr 6 20:09:42 UTC 2026

State table size 0% (81/198000) Show states

MBUF Usage 0% (3048/1000000)

Load average 0.75, 0.62, 0.55

CPU usage 3%

Memory usage 15% of 1985 MIB

SWAP usage 0% of 1024 MIB

Disks

Mount	Used	Size	Usage
/	816M	34G	2% of 34G (zfs)
/etc	476K	33G	0% of 33G (zfs)
/home	96K	33G	0% of 33G (zfs)
/pfSense	96K	33G	0% of 33G (zfs)
/pfSense/reservation	96K	37G	0% of 37G (zfs)

Interfaces

- WAN 1000baseT <full-duplex> 192.168.250.129
f015.4ba5.5a2b:1000.20c:29ff:fe2f:b119
- LAN 1000baseT <full-duplex> 192.168.254.129

MUST have your Netgate Device ID (NDI) from your firewall in order to validate support for this unit. Write down your NDI and store it in a safe place. You can purchase TAC supports [here](#).

11:34 PM 4/6/2026

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

18°C عالم عاتل

Search

ENG

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x64 pc1
- kali-linux T-19 vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

Home

192.168.254.129/#

pfSense.home.arp

/etc	476K	33G	0% of 33G (zfs)
/home	96K	33G	0% of 33G (zfs)
/pfSense	96K	33G	0% of 33G (zfs)
/pfSense/reservation	96K	37G	0% of 37G (zfs)
/tmp	164K	33G	0% of 33G (zfs)
/var	268K	33G	0% of 33G (zfs)
/var/cache	96K	33G	0% of 33G (zfs)
/var/cache/pkg	96K	33G	0% of 33G (zfs)
/var/db	916K	33G	0% of 33G (zfs)
/var/db/pkg	4.8M	33G	0% of 33G (zfs)
/var/empty	96K	33G	0% of 33G (zfs)
/var/log	1.2M	33G	0% of 33G (zfs)
/var/run	116K	4.0M	3% of 4.0M (tmpfs)
/var/tmp	104K	33G	0% of 33G (zfs)

pfSense is developed and maintained by Netgate. © ESP, 2004 - 2026. View license.


11:34 PM 4/6/2026

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.


18°C عالم عاتل

Search

ENG

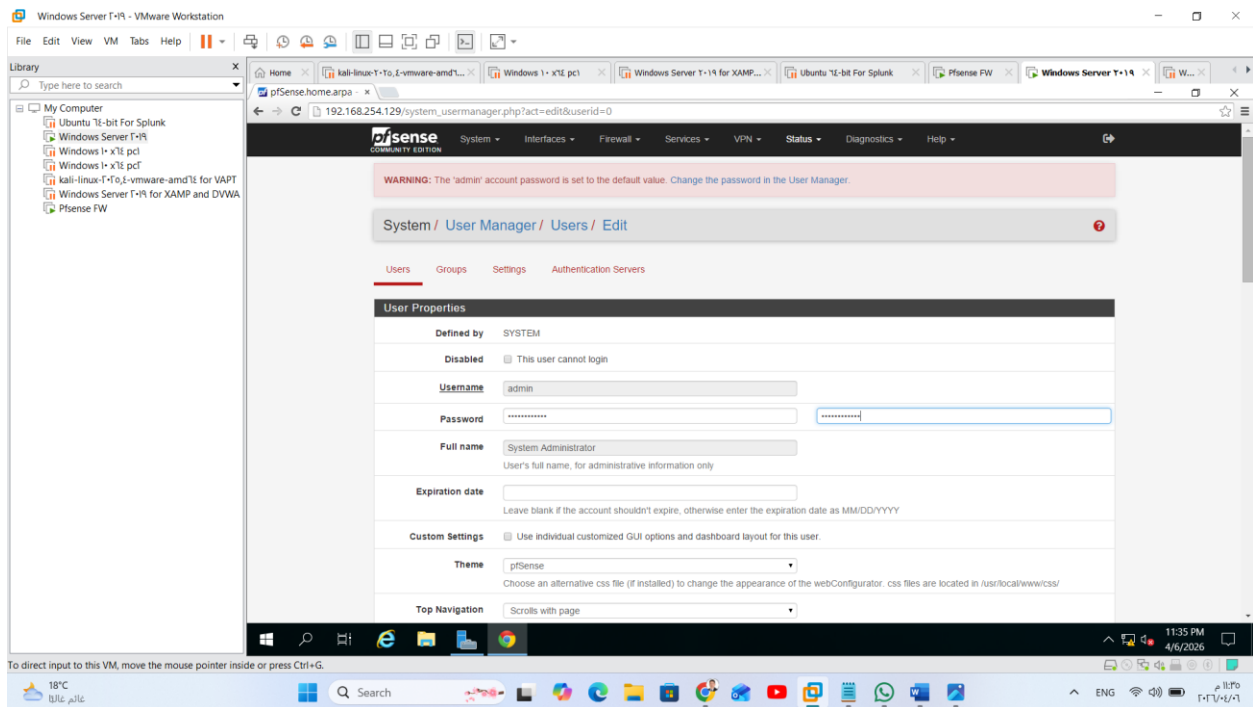

admin:Pfsense@2026

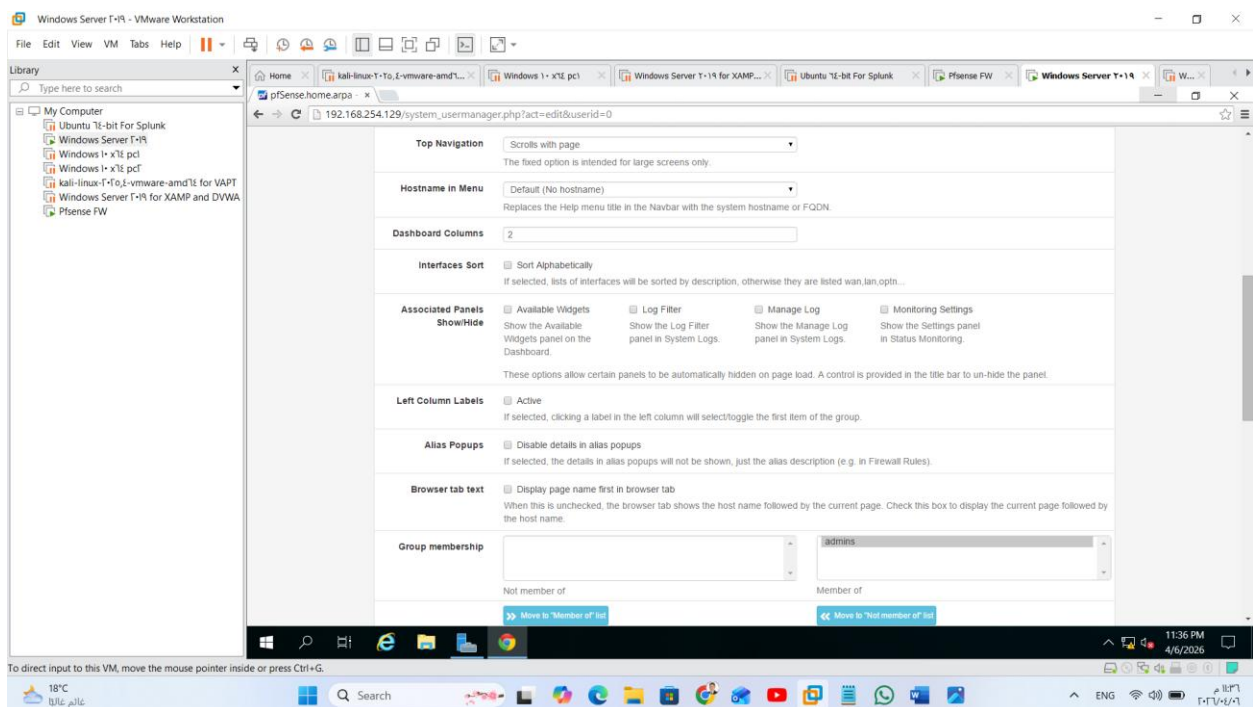

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129/system_usermanager.php?act=edit&userid=0

Not member of

Member of

Move to "Member of" list

Move to "Not member of" list

Hold down CTRL (PC)/COMMAND (Mac) key to select multiple items.

Effective Privileges

Inherited from	Name	Description	Action
admins	WebCty - All pages	Allow access to all pages (admin privilege)	
User - System: Shell account access		Indicates whether the user is able to login for example via SSH. (admin privilege)	

Security notice: This user effectively has administrator-level access

+ Add

User Certificates

Name	CA
------	----

+ Add

Keys

Authorized keys ☐ Click to paste an authorized key

Authorized SSH Keys

Enter authorized SSH keys for this user

11:37 PM 4/6/2026

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

18°C عالم عاتق

Search

ENG

18°C عالم عاتق

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129/system_usermanager.php?act=edit&userid=0

+ Add

User Certificates

Name	CA
------	----

+ Add

Keys

Authorized keys ☐ Click to paste an authorized key

Authorized SSH Keys

Enter authorized SSH keys for this user

IPsec Pre-Shared Key

Shell Behavior

Keep Command History ☐ Keep shell command history between login sessions

If this user has shell access, this option preserves the last 1000 unique commands entered at a shell prompt between login sessions. The user can access history using the up and down arrows at an SSH or console shell prompt and search the history by typing a partial command and then using the up or down arrows.

Save

pfsense is developed and maintained by Netgate. © ESP, 2004 - 2020. View license.

11:37 PM 4/6/2026

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

18°C عالم عاتق

Search

ENG

18°C عالم عاتق

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129/system_usermanager.php

System / User Manager / Users

Users Groups Settings Authentication Servers

Username	Full name	Status	Groups	Actions
admin	System Administrator	✓	admins	Edit

[+ Add](#) [Delete](#)

Additional users can be added here. User permissions for accessing the webConfigurator can be assigned directly or inherited from group memberships. Some system object properties can be modified but they cannot be deleted.

Accounts added here are also used for other parts of the system such as OpenVPN, IPSec, and Captive Portal.

pfSense is developed and maintained by Netgate. © 2004 - 2026 View license.

11:37 PM 4/6/2026

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129/index.php?logout

Status / Dashboard

System Information

Name	pfSense home.arp
User	admin@192.168.254.140 (Local Database)
System	VMware Virtual Machine Netgate Device ID: 146511d02e1ff27b94a
BIOS	Vendor: Phoenix Technologies LTD Version: 6.00 Release Date: Thu Nov 12 2020
Version	2.7.2-RELEASE (amd64) Built on Wed Dec 6 20:10:00 UTC 2023 FreeBSD 14.0-CURRENT The system is on the latest version. Version information updated at Mon Apr 6 21:36:52 UTC 2026
CPU Type	12th Gen Intel(R) Core(TM) i5-1235U 2 CPUs: 1 package(s) x 2 core(s) AES-NI CPU Crypto: Yes (inactive) QAT Crypto: No
Hardware crypto	inactive
Kernel PTI	Disabled
MD5 Mitigation	inactive
Uptime	00 Hour 58 Minutes 22 Seconds
Current date/time	Mon Apr 6 21:38:47 UTC 2026

Netgate Services And Support

Contract type: [Community Support](#)
[Community Support Only](#)

NETGATE AND pfSense COMMUNITY SUPPORT RESOURCES

If you purchased your pfSense gateway firewall appliance from Netgate and elected **Community Support** at the point of sale or installed pfSense on your own hardware, you have access to various community support resources. This includes the **NETGATE RESOURCE LIBRARY**.



You also may upgrade to a Netgate Global Technical Assistance Center (TAC) Support subscription. We're always on! Our team is staffed 24x7x365 and committed to delivering enterprise-class, worldwide support at a price point that is more than competitive when compared to others in our space.



- [Upgrade Your Support](#)
- [Netgate Global Support FAQ](#)
- [Netgate Professional Services](#)
- [Community Support Resources](#)
- [Official pfSense Training by Netgate](#)
- [Visit Netgate.com](#)



If you decide to purchase a Netgate Global TAC Support subscription, you **MUST** have your **Netgate Device ID (NDI)** from your firewall in order to validate support for this unit. Write down your NDI and store it in a safe place. You can purchase TAC supports [here](#).



11:38 PM 4/6/2026

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

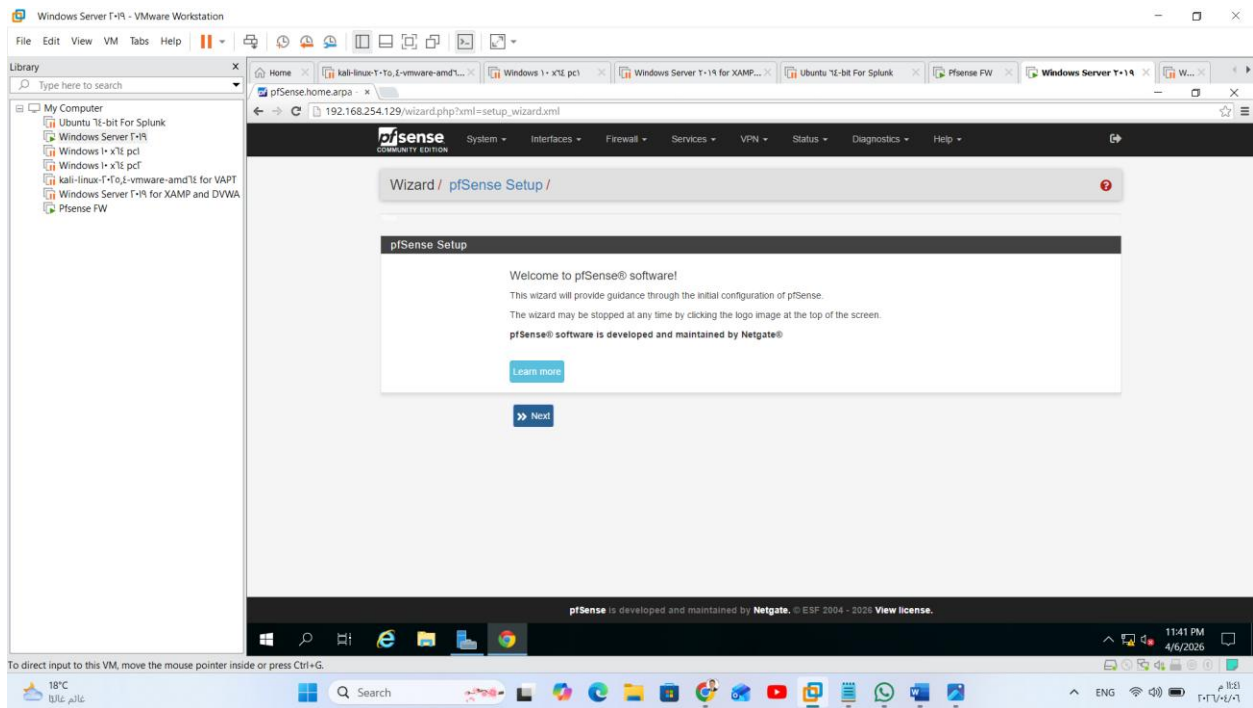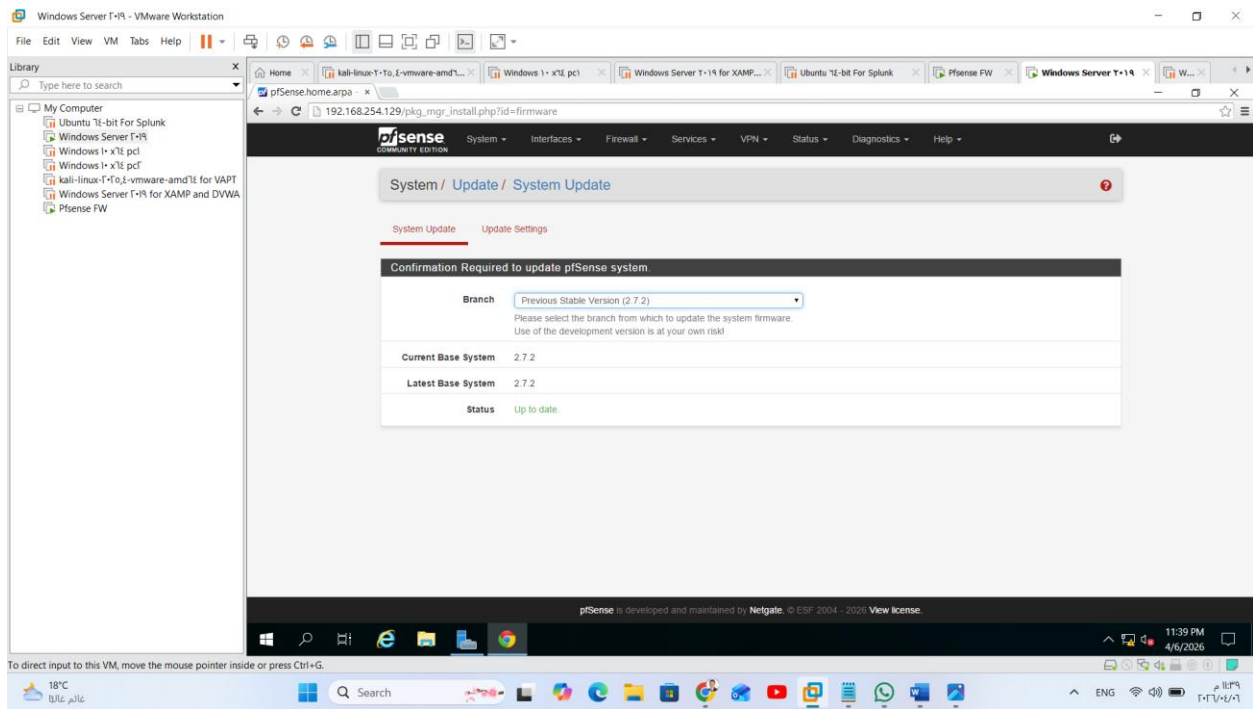

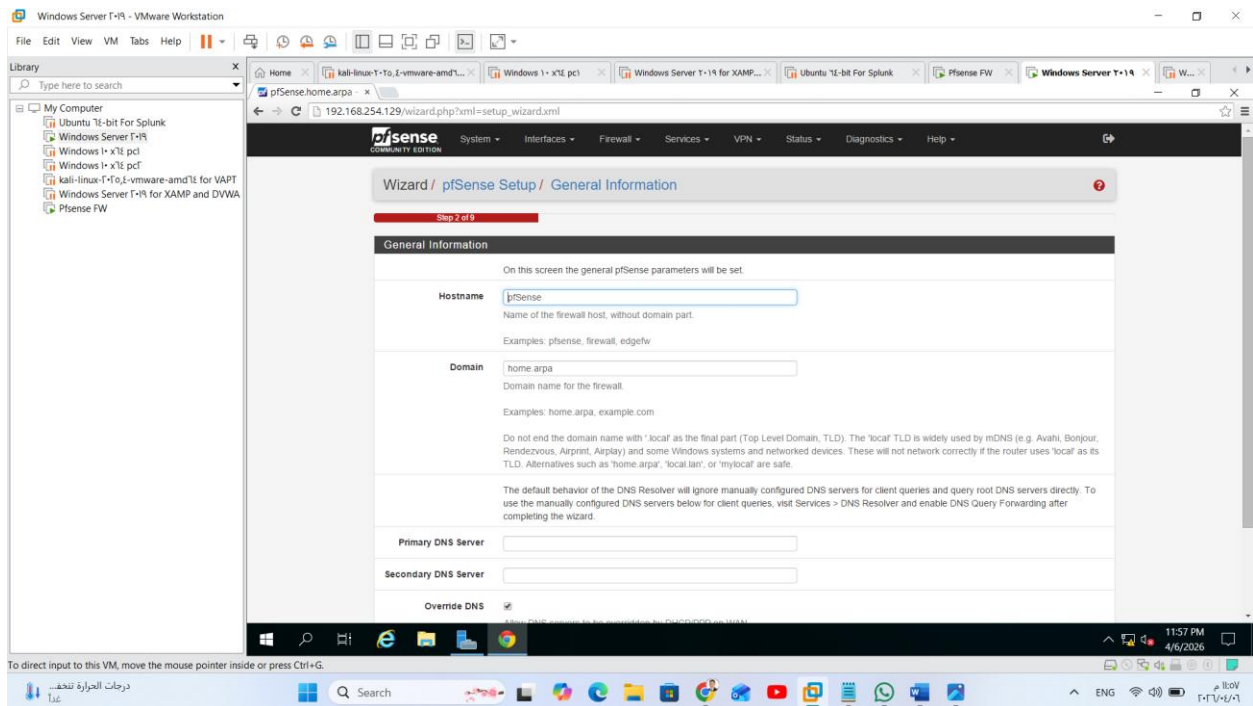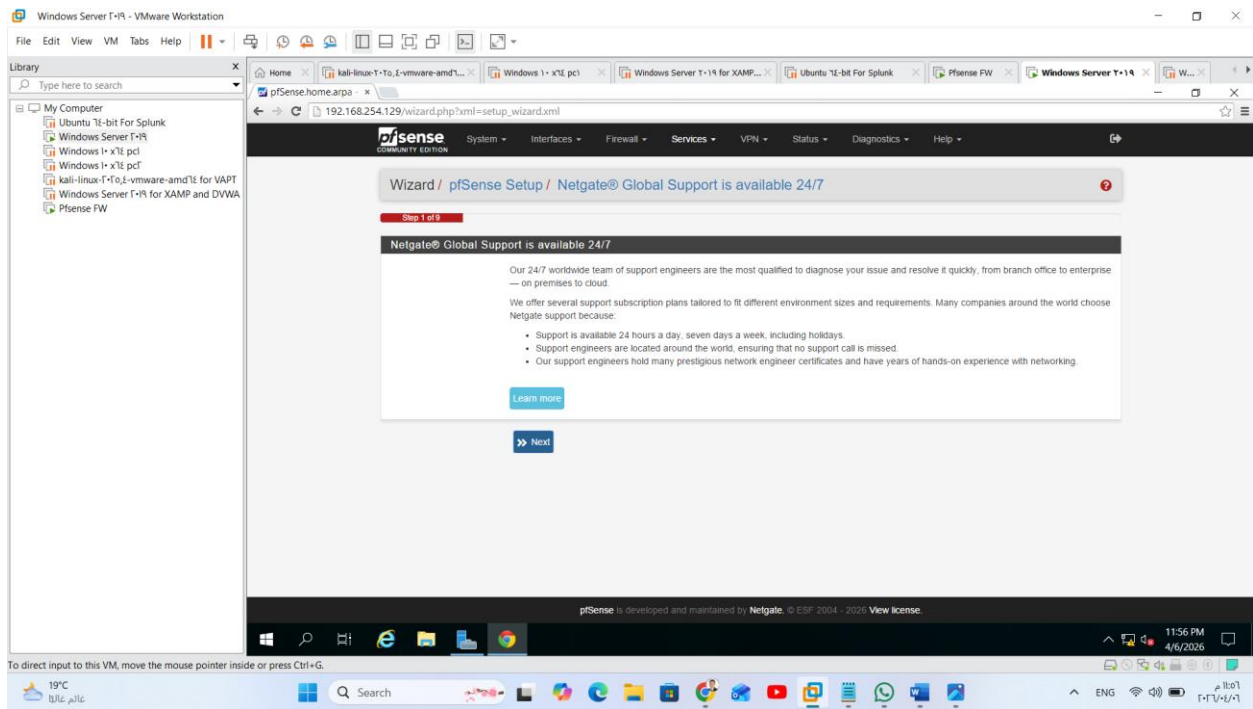

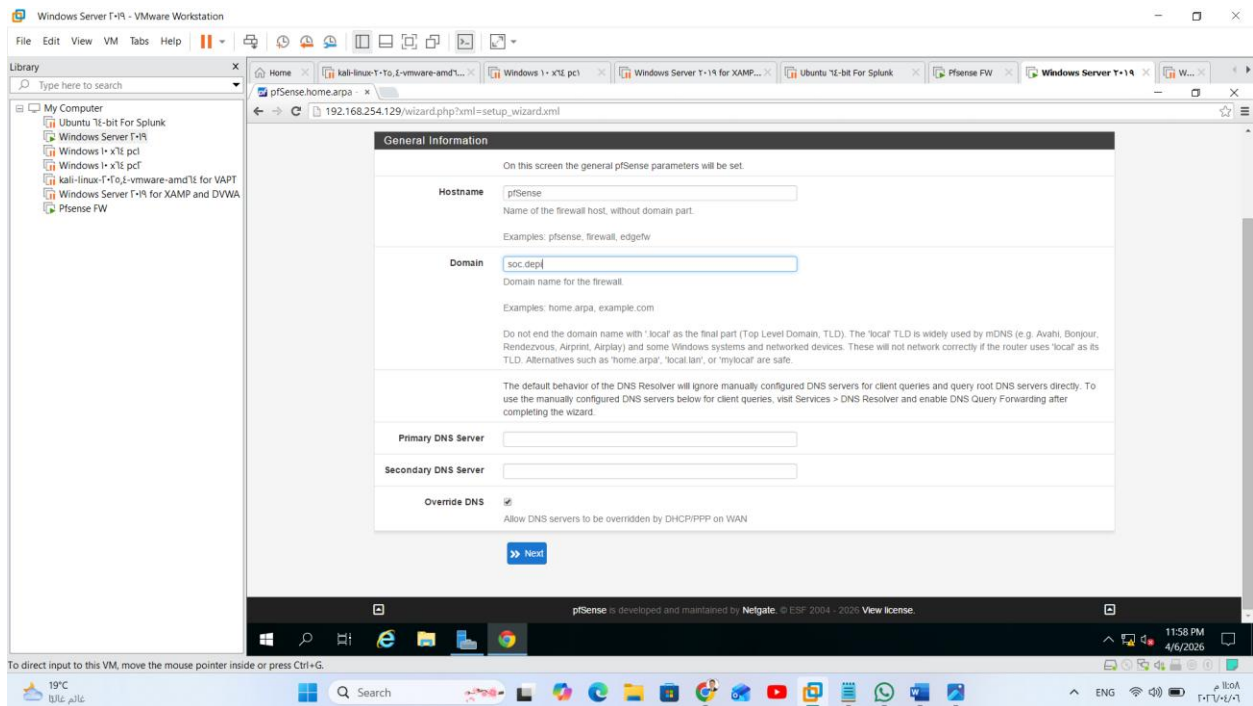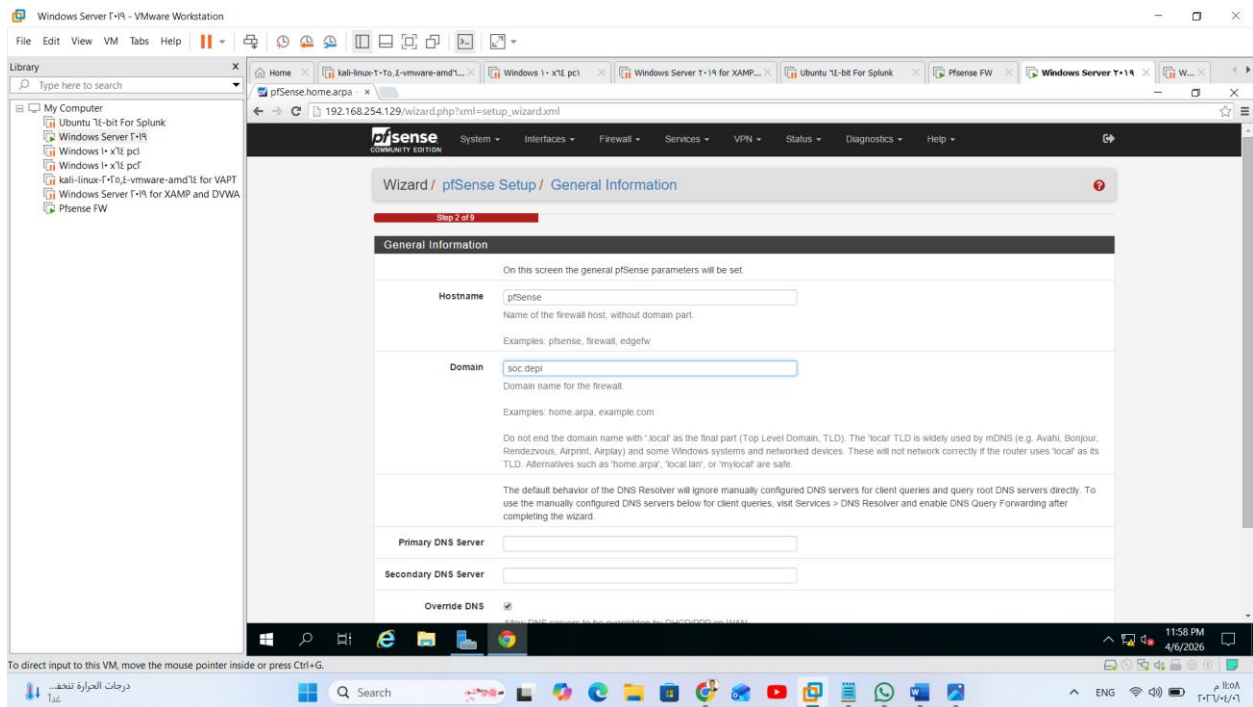

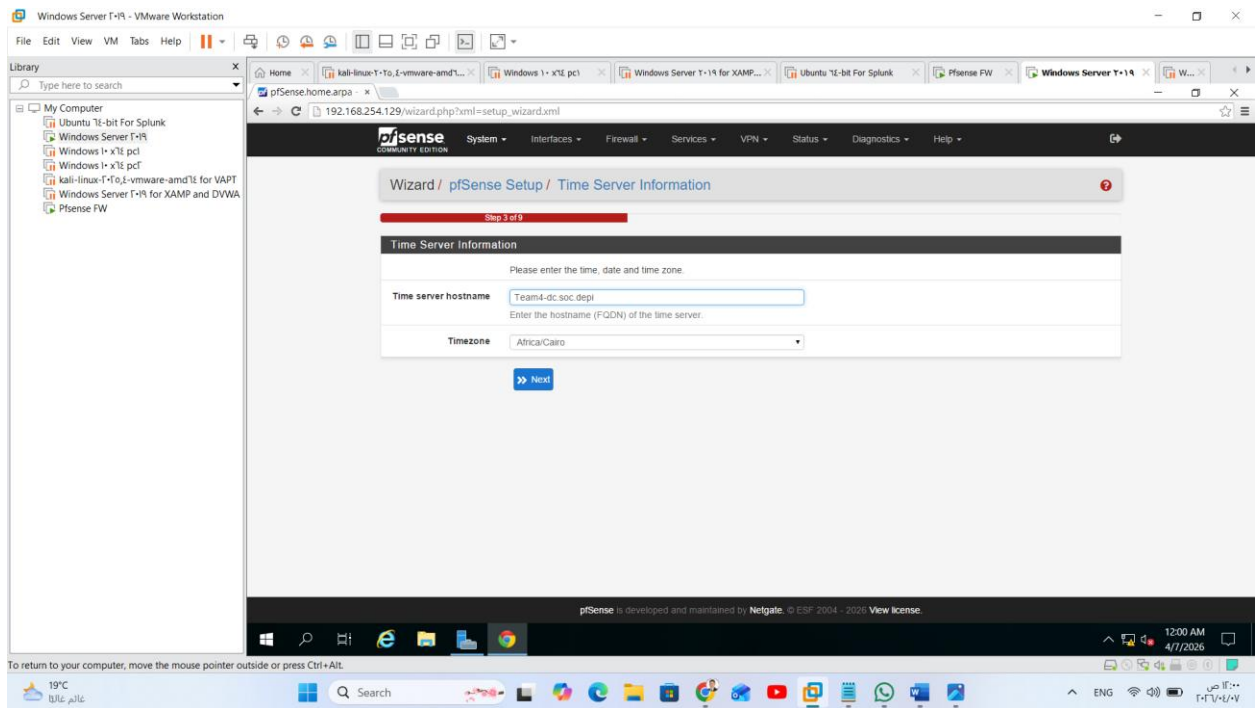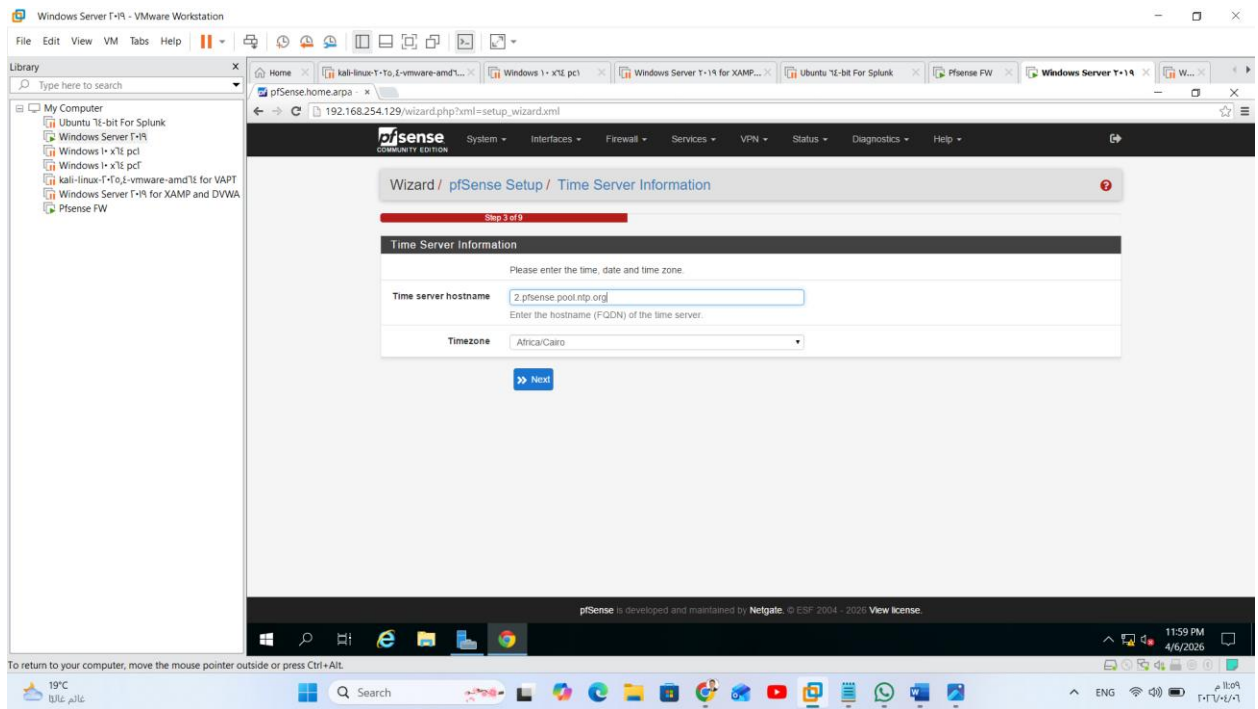

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x64 pc1
- Windows 10 x64 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129/wizard.php?xml=setup_wizard.xml

pfSense Community Edition

System Interfaces Firewall Services VPN Status Diagnostics Help

Wizard / pfSense Setup / Configure WAN Interface

Step 4 of 9

Configure WAN Interface

On this screen the Wide Area Network information will be configured.

Selected Type: Static

General configuration

MAC Address

This field can be used to modify ("spoof") the MAC address of the WAN interface (may be required with some cable connections). Enter a MAC address in the following format: xx:xx:xx:xx:xx:xx or leave blank.

MTU

Set the MTU of the WAN interface. If this field is left blank, an MTU of 1492 bytes for PPPoE and 1500 bytes for all other connection types will be assumed.

MSS

If a value is entered in this field, then MSS clamping for TCP connections to the value entered above minus 40 (TCP/IP header size) will be in effect. If this field is left blank, an MSS of 1492 bytes for PPPoE and 1500 bytes for all other connection types will be assumed. This should match the above MTU value in most all cases.

Static IP Configuration

IP Address: 192.168.250.129

Subnet Mask: 24

To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

19°C عالم عاتلا

Search

ENG

12:01 AM 4/7/2026

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x64 pc1
- Windows 10 x64 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129/wizard.php?xml=setup_wizard.xml

pfSense Community Edition

System Interfaces Firewall Services VPN Status Diagnostics Help

Static IP Configuration

IP Address: 192.168.250.129

Subnet Mask: 24

Upstream Gateway: 192.168.250.2

DHCP client configuration

DHCP Hostname

The value in this field is sent as the DHCP client identifier and hostname when requesting a DHCP lease. Some ISPs may require this (for client identification).

PPPoE configuration

PPPoE Username

PPPoE Password

Show PPPoE password: ☐ Reveal password characters

PPPoE Service name

Hint: this field can usually be left empty

PPPoE Dial on demand: ☐ Enable Dial-On-Demand mode

This option causes the interface to operate in dial-on-demand mode, allowing a virtual full time connection. The interface is configured, but the actual connection of the link is delayed until qualifying outgoing traffic is detected.

PPPoE idle timeout

If no qualifying outgoing packets are transmitted for the specified number of seconds, the connection is brought down. An idle timeout of zero disables this feature.



To return to your computer, move the mouse pointer outside or press Ctrl+Alt.



19°C عالم عاتلا



Search

ENG

12:02 AM 4/7/2026

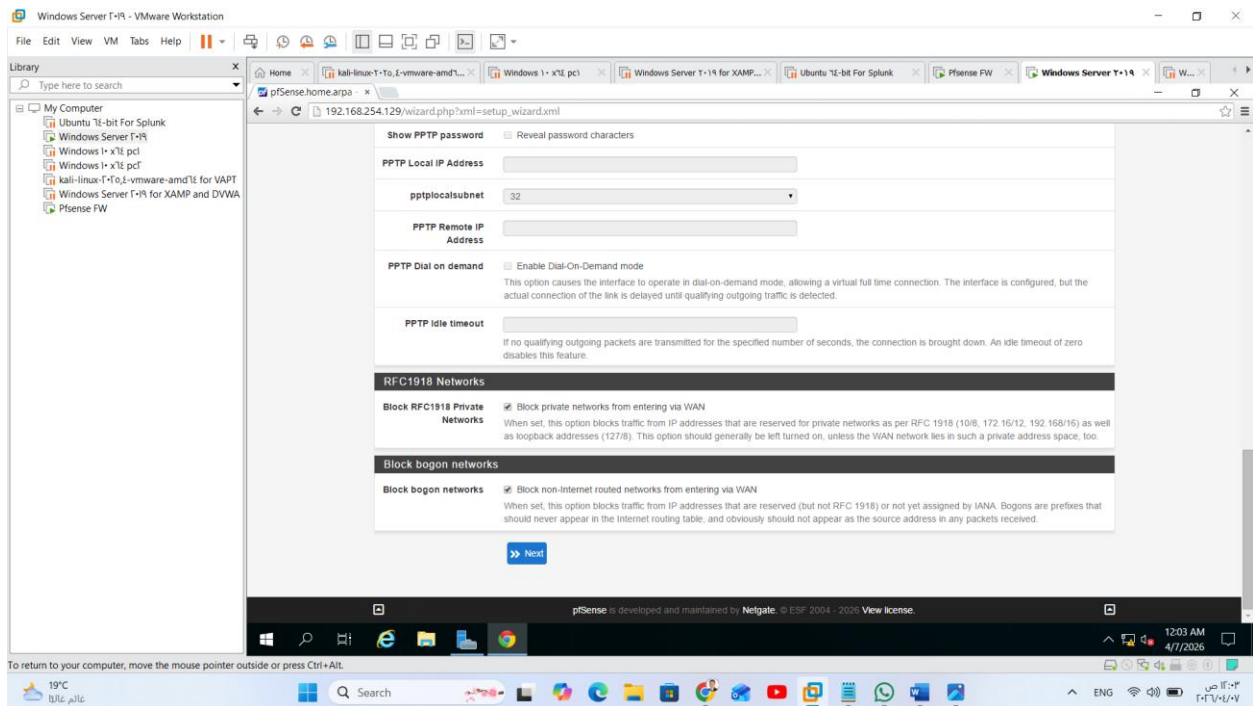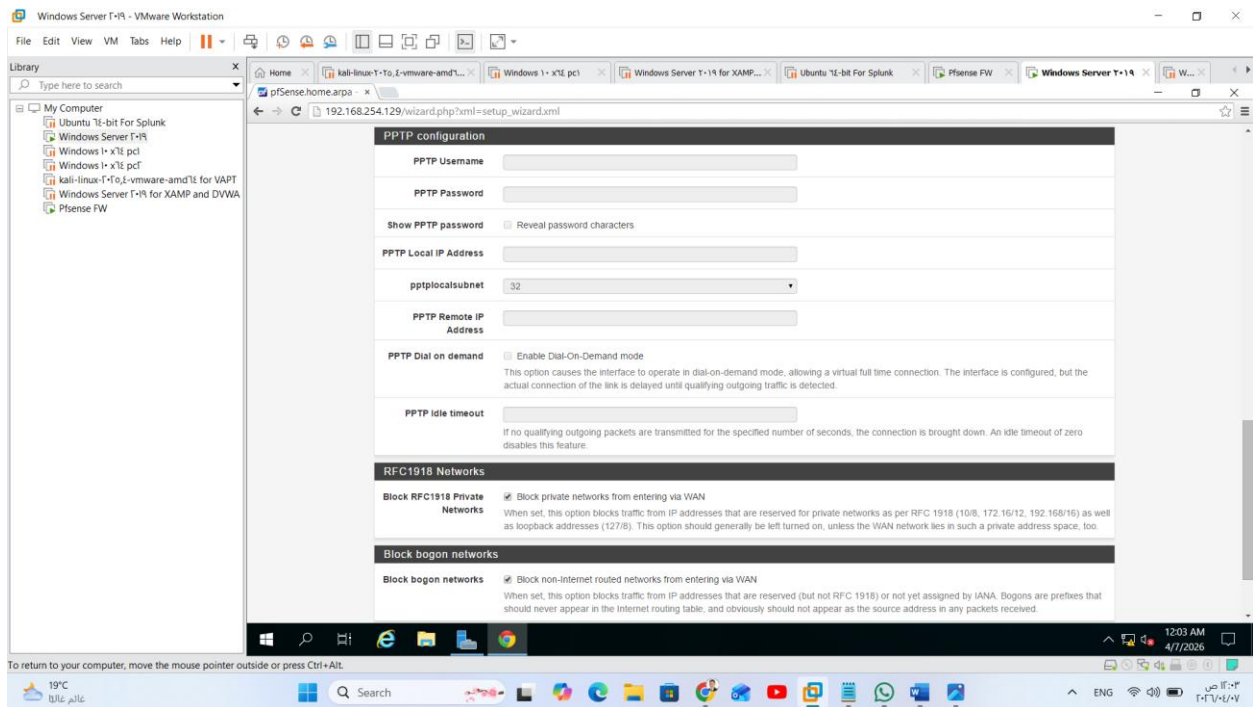

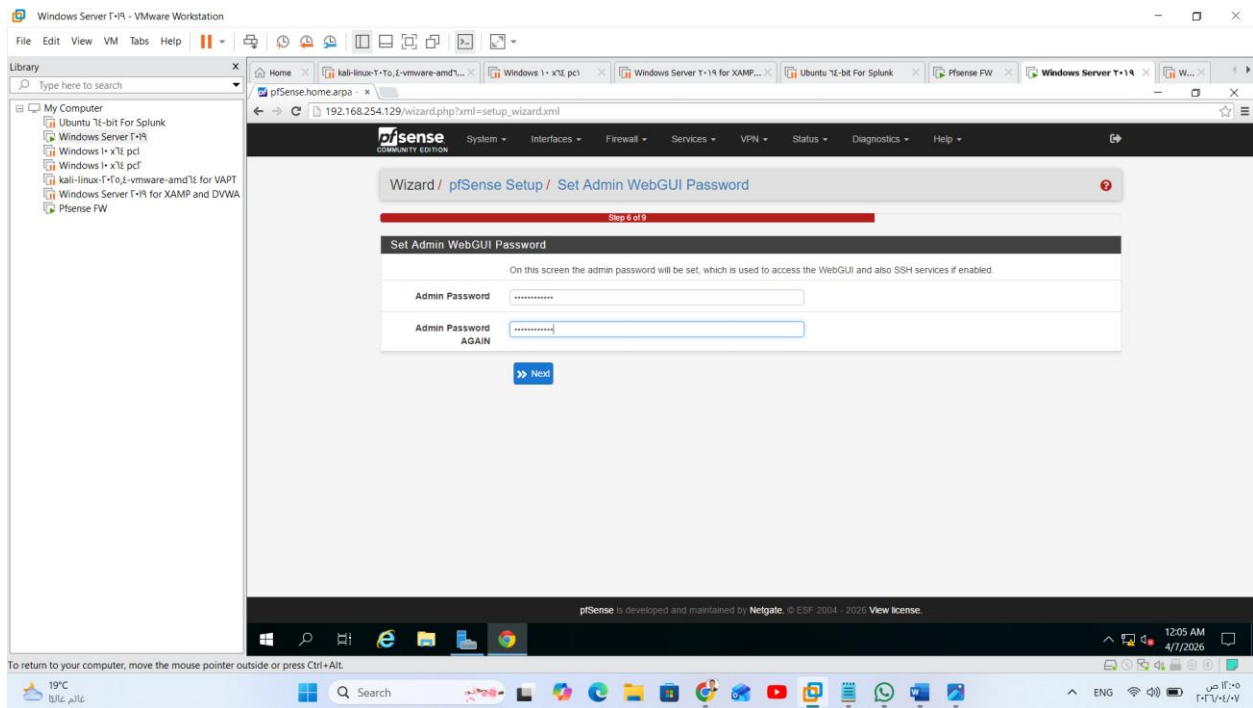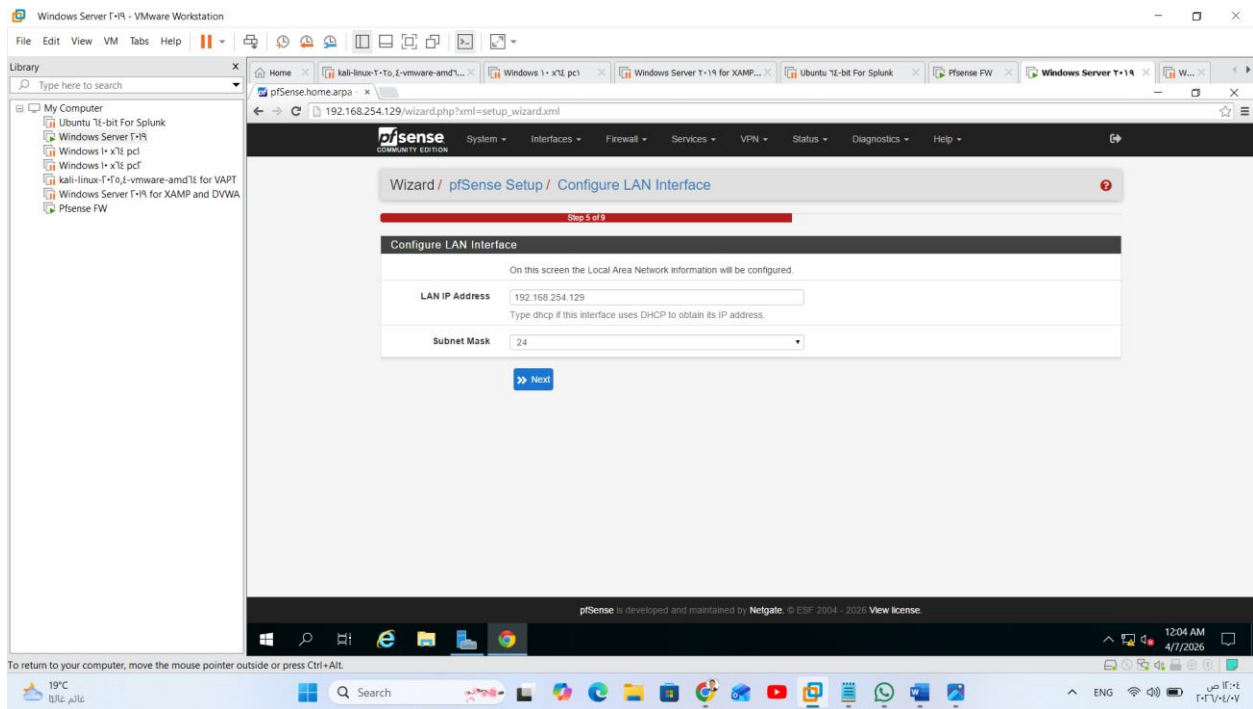

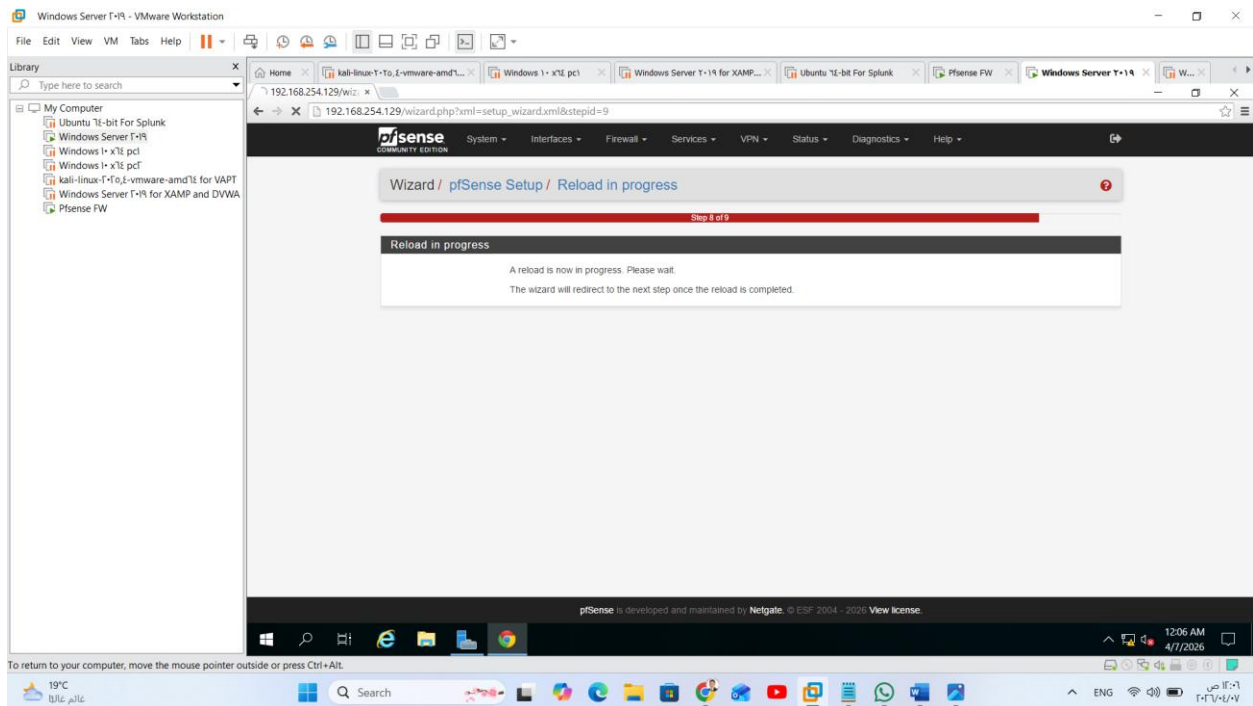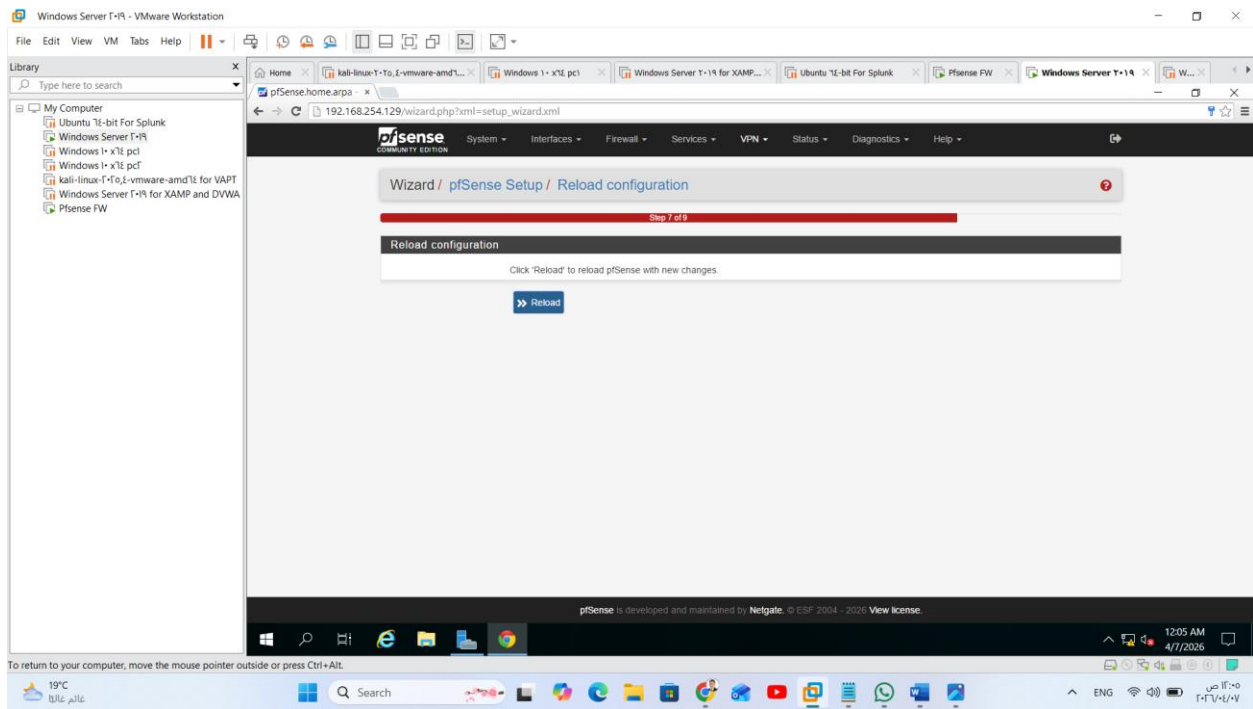

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x64 pc1
- Windows 10 x64 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129/wizard.php?xml=setup_wizard.xml&stepid=9

pfSense

System Interfaces Firewall Services VPN Status Diagnostics Help

Wizard / pfSense Setup / Wizard completed.

Step 3 of 9

Wizard completed

Congratulations! pfSense is now configured.

We recommend that you check to see if there are any software updates available. Keeping your software up to date is one of the most important things you can do to maintain the security of your network.

[Check for updates](#)

Remember, we're here to help.

[Click here](#) to learn about Netgate 24/7/365 support services.

User survey

Please help all the people involved in improving and expanding pfSense software by taking a moment to answer this short survey (all answers are anonymous)

[Anonymous User Survey](#)

Useful resources.

- Learn more about Netgate's product line, services, and pfSense software from our [website](#)
- To learn about Netgate appliances and other offers, visit our [store](#)
- Become part of the pfSense community. Visit our [forum](#)
- Subscribe to our [newsletter](#) for ongoing product information, software announcements and special offers.

[Finish](#)

12:06 AM 4/7/2026

19°C عالم عالى

Search

ENG

To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x64 pc1
- Windows 10 x64 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129/pkg_mgr_install.php?id=firmware

pfSense

System Interfaces Firewall Services VPN Status Diagnostics Help

System / Update / System Update

System Update Update Settings

Confirmation Required to update pfSense system

Branch:

Please select the branch from which to update the system firmware. Use of the development version is at your own risk!

Current Base System	2.7.2
Latest Base System	2.7.2
Status	Up to date.

pfSense is developed and maintained by Netgate. © 2004 - 2026 View license.



12:07 AM 4/7/2026

19°C عالم عالى

Search

ENG

To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

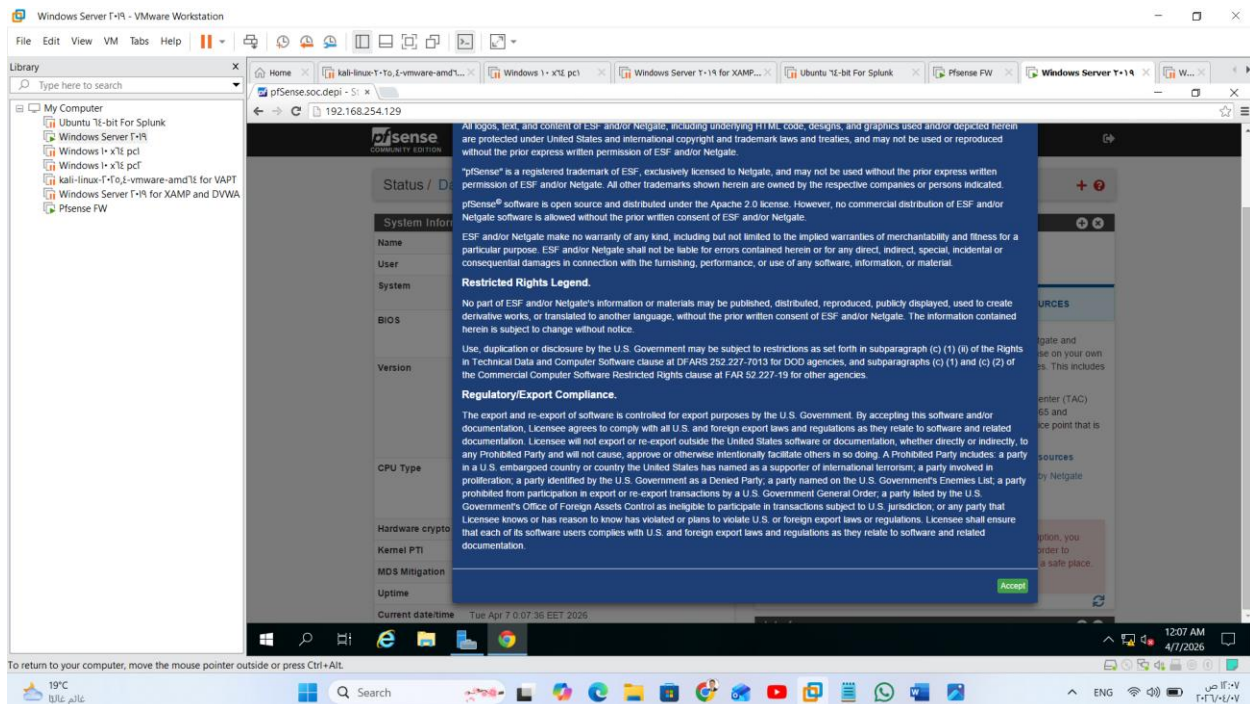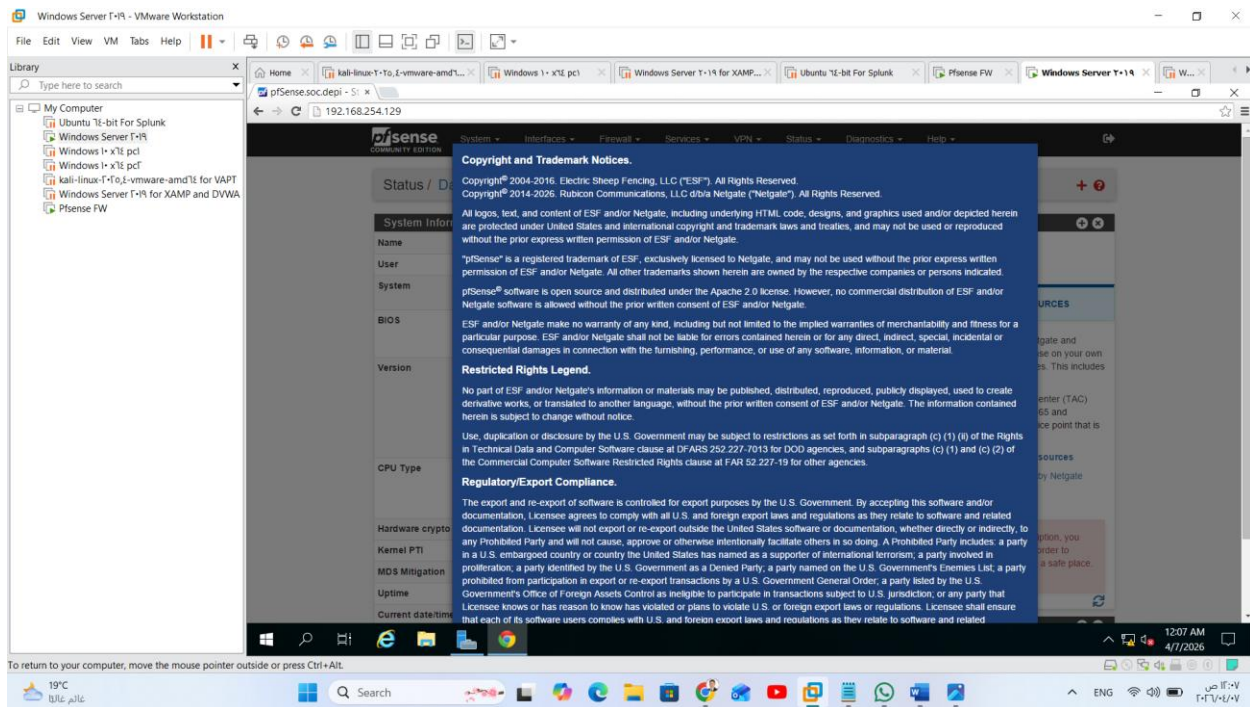

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129

pfSense COMMUNITY EDITION

System Interfaces Firewall Services VPN Status Diagnostics Help

Status / Dashboard

System Information

Name	pfSense.soc.depi
User	admin@192.168.254.140 (Local Database)
System	VMware Virtual Machine Netgate Device ID: 14d511d02e1ff27bb94a
BIOS	Vendor: Phoenix Technologies LTD Version: 6.00 Release Date: Thu Nov 12 2020
Version	2.7.2-RELEASE (amd64) built on Wed Dec 6 22:10:00 EET 2023 FreeBSD 14.0-CURRENT The system is on the latest version. Version information updated at Mon Apr 6 23:36:52 EET 2026
CPU Type	12th Gen Intel(R) Core(TM) i5-1235U 2 CPU(s): 1 package(s) x 2 core(s) AES-NI CPU Crypto: Yes (inactive) QAT Crypto: No
Hardware crypto	Inactive
Kernel PTI	Disabled
MDS Mitigation	Inactive
Uptime	01 Hour 27 Minutes 29 Seconds
Current datetime	Tue Apr 7 0:07:54 EET 2026

Netgate Services And Support

Contract type: Community Support
Community Support Only

NETGATE AND pfSense COMMUNITY SUPPORT RESOURCES

If you purchased your pfSense gateway firewall appliance from Netgate and elected **Community Support** at the point of sale or installed pfSense on your own hardware, you have access to various community support resources. This includes the **NETGATE RESOURCE LIBRARY**.

You also may upgrade to a Netgate Global Technical Assistance Center (TAC) Support subscription. We're always on! Our team is staffed 24x7x365 and committed to delivering enterprise-class, worldwide support at a price point that is more than competitive when compared to others in our space.

- Upgrade Your Support
- Netgate Global Support FAQ
- Netgate Professional Services
- Community Support Resources
- Official pfSense Training by Netgate
- Visit Netgate.com

If you decide to purchase a Netgate Global TAC Support subscription, you **MUST** have your **Netgate Device ID (NDI)** from your firewall in order to validate support for this unit. Write down your NDI and store it in a safe place. You can purchase TAC supports [here](#).

12:07 AM 4/7/2026

To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

19°C عالم عالى

Search

ENG

19°C عالم عالى

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129

pfSense.soc.depi - S

Interfaces

WAN	1000baseT <full-duplex>	192.168.250.129 fe15:4ba5:5a2b:1000:20c:29ff:fe2f:b119
LAN	1000baseT <full-duplex>	192.168.254.129

System Information

Current datetime	Tue Apr 7 0:09:49 EET 2026
DNS server(s)	• 127.0.0.1 • 192.168.250.2 • 192.168.254.1
Last config change	Tue Apr 7 0:05:54 EET 2026
State table size	0% (14/198000) Show states
MBUF Usage	0% (3556/1000000)
Load average	0.36, 0.39, 0.39
CPU usage	4%
Memory usage	17% of 1985 MB
SWAP usage	0% of 1024 MB

Disks

Mount	Used	Size	Usage
/	817M	34G	2% of 34G (zfs)
/etc	452K	33G	0% of 33G (zfs)
/home	96K	33G	0% of 33G (zfs)
/pfSense	96K	33G	0% of 33G (zfs)
/pfSense/reservation	96K	37G	0% of 37G (zfs)
/tmp	180K	33G	0% of 33G (zfs)

12:09 AM 4/7/2026

To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

19°C عالم عالى

Search

ENG

19°C عالم عالى

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- kali-linux T-19.1-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

Home | kali-linux T-19.1-vmware-amd64 | Windows 10 x86 pc1 | Windows Server T-19 for XAMP... | Ubuntu 16-bit For Splunk | Pfsense FW | Windows Server T-19 | W... |

pfsense.soc.depi - S...

192.168.254.129

4% of 34G (zfs)

/etc	452K	33G	0% of 33G (zfs)
/home	96K	33G	0% of 33G (zfs)
/pfSense	96K	33G	0% of 33G (zfs)
/pfSense/reservation	96K	37G	0% of 37G (zfs)
/tmp	180K	33G	0% of 33G (zfs)
/var	276K	33G	0% of 33G (zfs)
/var/cache	96K	33G	0% of 33G (zfs)
/var/cache/pkg	96K	33G	0% of 33G (zfs)
/var/db	924K	33G	0% of 33G (zfs)
/var/db/pkg	4.8M	33G	0% of 33G (zfs)
/var/empty	96K	33G	0% of 33G (zfs)
/var/log	1.2M	33G	0% of 33G (zfs)
/var/run	108K	4.0M	3% of 4.0M (tmpfs)
/var/tmp	104K	33G	0% of 33G (zfs)

pfsense is developed and maintained by Netgate, © ESP 2004 - 2020. View license.

12:10 AM 4/7/2026

To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

19°C عالم عاتلا

Search

ENG

19°C عالم عاتلا

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- kali-linux T-19.1-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

Home | kali-linux T-19.1-vmware-amd64 | Windows 10 x86 pc1 | Windows Server T-19 for XAMP... | Ubuntu 16-bit For Splunk | Pfsense FW | Windows Server T-19 | W... |

pfsense.soc.depi - S...

192.168.254.129

pfsense COMMUNITY EDITION

System - Interfaces - Firewall - Services - VPN - Status - Diagnostics - Help -

Status / D

Advanced Certificates General Setup High Availability Package Manager Register 4.140 (Local Database) Routing Setup Wizard Update User Manager Nov 12 2020 Logout (admin) 9541 FreeBSD 14.0-CURRENT

The system is on the latest version. Version information updated at Mon Apr 6 23:36:52 EET 2026

CPU Type 12th Gen Intel(R) Core(TM) i5-1235U 2 CPUs: 1 package(s) x 2 core(s) AES-NI CPU Crypto: Yes (inactive) QAT Crypto: No

Hardware crypto inactive

Kernel PTI Disabled

MD5 Mitigation inactive

Uptime 01 Hour 30 Minutes 37 Seconds

Current date/time Tue Apr 7 0:11:02 EET 2026

Netgate Services And Support

Contract type Community Support Community Support Only

NETGATE AND pfSense COMMUNITY SUPPORT RESOURCES

If you purchased your pfSense gateway firewall appliance from Netgate and elected **Community Support** at the point of sale or installed pfSense on your own hardware, you have access to various community support resources. This includes the **NETGATE RESOURCE LIBRARY**.

You also may upgrade to a Netgate Global Technical Assistance Center (TAC) Support subscription. We're always on! Our team is staffed 24x7x365 and committed to delivering enterprise-class, worldwide support at a price point that is more than competitive when compared to others in our space.

- Upgrade Your Support
- Netgate Global Support FAQ
- Netgate Professional Services
- Community Support Resources
- Official pfSense Training by Netgate
- Visit Netgate.com

If you decide to purchase a Netgate Global TAC Support subscription, you **MUST** have your **Netgate Device ID (NDI)** from your firewall in order to validate support for this unit. Write down your NDI and store it in a safe place. You can purchase TAC supports [here](#).

12:11 AM 4/7/2026

To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

19°C عالم عاتلا

Search

ENG

19°C عالم عاتلا

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129

System Interfaces Firewall Services VPN Status Diagnostics Help

Status / Dashboard

WAN LAN

System Information

Name	pfSense soc.depi
User	admin@192.168.254.140 (Local Database)
System	VMware Virtual Machine Netgate Device ID: 14d511d02e1ff27bb94a
BIOS	Vendor: Phoenix Technologies LTD Version: 6.00 Release Date: Thu Nov 12 2020
Version	2.7.2-RELEASE (amd64) built on Wed Dec 6 22:10:00 EET 2023 FreeBSD 14.0-CURRENT The system is on the latest version. Version information updated at Mon Apr 6 23:36:52 EET 2026
CPU Type	12th Gen Intel(R) Core(TM) i5-1235U 2 CPUs: 1 package(s) x 2 core(s) AES-NI CPU Crypto: Yes (inactive) QAT Crypto: No
Hardware crypto	Inactive
Kernel PTI	Disabled
MDS Mitigation	Inactive
Uptime	01 Hour 32 Minutes 17 Seconds
Current datetime	Tue Apr 7 0 12:42 EET 2026

Netgate Services And Support

Contract type: Community Support
Community Support Only

NETGATE AND pfsense COMMUNITY SUPPORT RESOURCES

If you purchased your pfSense gateway firewall appliance from Netgate and elected **Community Support** at the point of sale or installed pfSense on your own hardware, you have access to various community support resources. This includes the **NETGATE RESOURCE LIBRARY**.

You also may upgrade to a Netgate Global Technical Assistance Center (TAC) Support subscription. We're always on! Our team is staffed 24x7x365 and committed to delivering enterprise-class, worldwide support at a price point that is more than competitive when compared to others in our space.

- Upgrade Your Support
- Netgate Global Support FAQ
- Netgate Professional Services
- Community Support Resources
- Official pfSense Training by Netgate
- Visit Netgate.com

If you decide to purchase a Netgate Global TAC Support subscription, you **MUST** have your **Netgate Device ID (NDI)** from your firewall in order to validate support for this unit. Write down your NDI and store it in a safe place. You can purchase TAC supports here.

12:12 AM 4/7/2026

To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129/interfaces_assign.php

System Interfaces Firewall Services VPN Status Diagnostics Help

Interfaces / Interface Assignments

Interface has been added.

Interface Assignments Interface Groups Wireless VLANs QinQs PPPs GREs GIFs Bridges LAGGs

Interface	Network port
WAN	em0 (00:0c:29:2f:b1:19)
LAN	em1 (00:0c:29:2f:b1:23)
OPT1	em2 (00:0c:29:2f:b1:2d)
OPT2	em3 (00:0c:29:2f:b1:37)
OPT3	em4 (00:0c:29:2f:b1:4b)

Save

Interfaces that are configured as members of a lagg(4) interface will not be shown.
Wireless interfaces must be created on the Wireless tab before they can be assigned.

12:13 AM 4/7/2026

To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

Home

192.168.254.2/interfaces.php?if=wlan

Not secure

192.168.254.2/interfaces.php?if=wlan

System Interfaces Firewall Services VPN Status Diagnostics Help

Interfaces / WAN (em0)

The changes have been applied successfully.

General Configuration

Enable ☒ Enable interface

Description WAN_192_168_250_129_internet
Enter a description (name) for the interface here.

IPv4 Configuration Type Static IPv4

IPv6 Configuration Type None

MAC Address x000000000000
This field can be used to modify ("spooF") the MAC address of this interface.
Enter a MAC address in the following format: x000000000000 or leave blank.

MTU

23°C

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

Home

192.168.254.129/interfaces.php?if=wlan

Static IPv4 Configuration

IPv4 Address 192.168.250.129 / 24

IPv4 Upstream gateway WANGOW - 192.168.250.2 + Add a new gateway

If this interface is an Internet connection, select an existing Gateway from the list or add a new one using the "Add" button.
On local area network interfaces the upstream gateway should be "none".
Selecting an upstream gateway causes the firewall to treat this interface as a WAN type interface.
Gateways can be managed by clicking here.

DHCPv6 Client Configuration

Options ☒ Advanced Configuration ☐ Configuration Override
Use advanced DHCPv6 configuration options. Override the configuration from this file.

Use IPv4 connectivity as parent interface ☐ Request a IPv6 prefix/information through the IPv4 connectivity link

Request only an IPv6 prefix ☐ Only request an IPv6 prefix, do not request an IPv6 address

DHCPv6 Prefix Delegation size 64
The value in this field is the delegated prefix length provided by the DHCPv6 server. Normally specified by the ISP.

Send IPv6 prefix hint ☐ Send an IPv6 prefix hint to indicate the desired prefix size for delegation

Do not wait for a RA ☐ Required by some ISPs, especially those not using PPPoE

Configuration File Override
The value in this field is the full absolute path to a DHCP client configuration file: [/{dirname}/filename.ext]
Value Substitutions in Config File: (interface), (hostname), (mac_addr_asciiCD), (mac_addr_hexCD)
Where C is Uppercase or Lowercase Case, and D is " " Delimiter (space, colon, hyphen, or period) (omitted for none).
Some ISPs may require certain options be or not be sent.

Reserved Networks

19°C

To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129/interfaces.php?if=wlan

Request only an IPv6 prefix ☐ Only request an IPv6 prefix, do not request an IPv6 address

DHCPv6 Prefix Delegation size 64
The value in this field is the delegated prefix length provided by the DHCPv6 server. Normally specified by the ISP.

Send IPv6 prefix hint ☐ Send an IPv6 prefix hint to indicate the desired prefix size for delegation

Do not wait for a RA ☐ Required by some ISPs, especially those not using PPPoE

Configuration File Override
The value in this field is the full absolute path to a DHCP client configuration file: [/{dirname}/./{filename} ext]
Value Substitutions in Config File: {interface}, {hostname}, {mac_addr_asciiCD}, {mac_addr_hexCD}
Where C is Uppercase or Lowercase, and D is 1-9 Delimiter (space, colon, hyphen, or period) (omitted for none).
Some ISPs may require certain options be or not be sent.

Reserved Networks

Block private networks and loopback addresses ☒
Blocks traffic from IP addresses that are reserved for private networks per RFC 1918 (10/8, 172.16/12, 192.168/16) and unique local addresses per RFC 4193 (F000::/7) as well as loopback addresses (127/8). This option should generally be turned on, unless this network interface resides in such a private address space, too.

Block bogon networks ☒
Blocks traffic from reserved IP addresses (but not RFC 1918) or not yet assigned by IANA. Bogons are prefixes that should never appear in the Internet routing table, and so should not appear as the source address in any packets received.
This option should only be used on external interfaces (WANs). It is not necessary on local interfaces and it can potentially block required local traffic.
Note: The update frequency can be changed under System > Advanced, Firewall & NAT settings.

Save

pfsense is developed and maintained by Netgate, © ESP 2004 - 2020. View license.

12:30 AM 4/7/2026

To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

19°C مساءً صافية

Search

ENG

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129/interfaces.php?if=wlan

pfsense SYSTEM EDITION

System Interfaces Firewall Services VPN Status Diagnostics Help

Interfaces / WAN_192_168_254_129_Internet (em0)

The WAN_192_168_254_129_Internet configuration has been changed.
The changes must be applied to take effect.
Don't forget to adjust the DHCP Server range if needed after applying.

Apply Changes

General Configuration

Enable ☒ Enable interface

Description WAN_192_168_254_129_Internet
Enter a description (name) for the interface here.

IPv4 Configuration Type Static IPv4

IPv6 Configuration Type DHCP6

MAC Address XXXXXXXXXX
This field can be used to modify ("spoof") the MAC address of this interface.
Enter a MAC address in the following format: xx:xx:xx:xx:xx:xx or leave blank.

MTU
If this field is blank, the adapter's default MTU will be used. This is typically 1500 bytes but can vary in some circumstances.

MSS
If a value is entered in this field, then MSS clamping for TCP connections to the value entered above minus 40 for IPv4 (TCP/IPv4 header size) and minus 60 for IPv6 (TCP/IPv6 header size) will be in effect.

12:30 AM 4/7/2026

To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

19°C مساءً صافية

Search

ENG

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- kali-linux T-19 vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129/interfaces.php?if=wan

System Interfaces Firewall Services VPN Status Diagnostics Help

Interfaces / WAN_192_168_254_129_internet (em0)

The changes have been applied successfully.

General Configuration

Enable	☒ Enable interface
Description	WAN_192_168_254_129_internet Enter a description (name) for the interface here.
IPv4 Configuration Type	Static IPv4
IPv6 Configuration Type	DHCP6
MAC Address	xx:xx:xx:xx:xx:xx This field can be used to modify ("spoof") the MAC address of this interface. Enter a MAC address in the following format: xx:xx:xx:xx:xx:xx or leave blank.
MTU	 If this field is blank, the adapter's default MTU will be used. This is typically 1500 bytes but can vary in some circumstances.
MSS	 If a value is entered in this field, then MSS clamping for TCP connections to the value entered above minus 40 for IPv4 (TCP/IPv4 header size) and minus 60 for IPv6 (TCP/IPv6 header size) will be in effect.
Speed and Duplex	Default (no preference, typically autoselect)

To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

19°C مساءً صافية

Search

ENG 12:30 AM 4/7/2026

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- kali-linux T-19 vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.129/interfaces.php?if=lan

System Interfaces Firewall Services VPN Status Diagnostics Help

Interfaces / LAN (em1)

General Configuration

Enable	☒ Enable interface
Description	LAN Enter a description (name) for the interface here.
IPv4 Configuration Type	Static IPv4
IPv6 Configuration Type	None
MAC Address	xx:xx:xx:xx:xx:xx This field can be used to modify ("spoof") the MAC address of this interface. Enter a MAC address in the following format: xx:xx:xx:xx:xx:xx or leave blank.
MTU	 If this field is blank, the adapter's default MTU will be used. This is typically 1500 bytes but can vary in some circumstances.
MSS	 If a value is entered in this field, then MSS clamping for TCP connections to the value entered above minus 40 for IPv4 (TCP/IPv4 header size) and minus 60 for IPv6 (TCP/IPv6 header size) will be in effect.
Speed and Duplex	Default (no preference, typically autoselect) Explicitly set speed and duplex mode for this interface. WARNING: MUST be set to autoselect (automatically negotiate speed) unless the port this interface connects to has its speed and duplex forced.



Static IPv4 Configuration



To return to your computer, move the mouse pointer outside or press Ctrl+Alt.

19°C مساءً صافية



Search

ENG 12:31 AM 4/7/2026

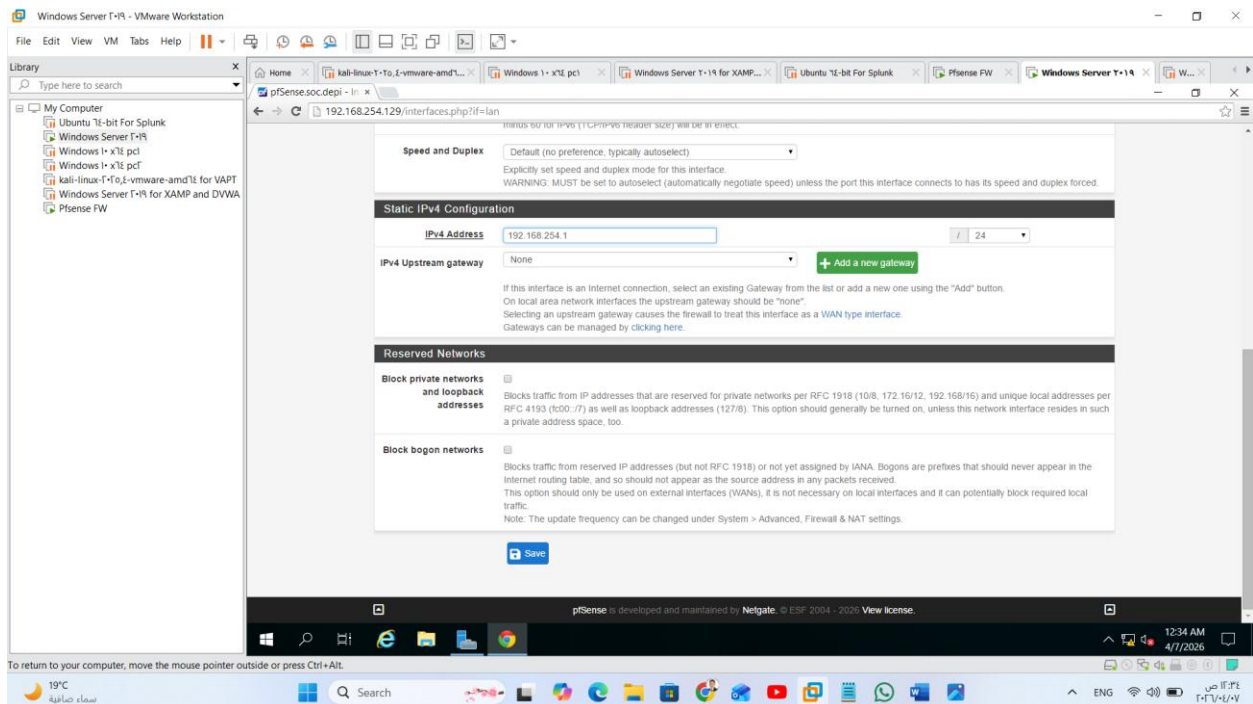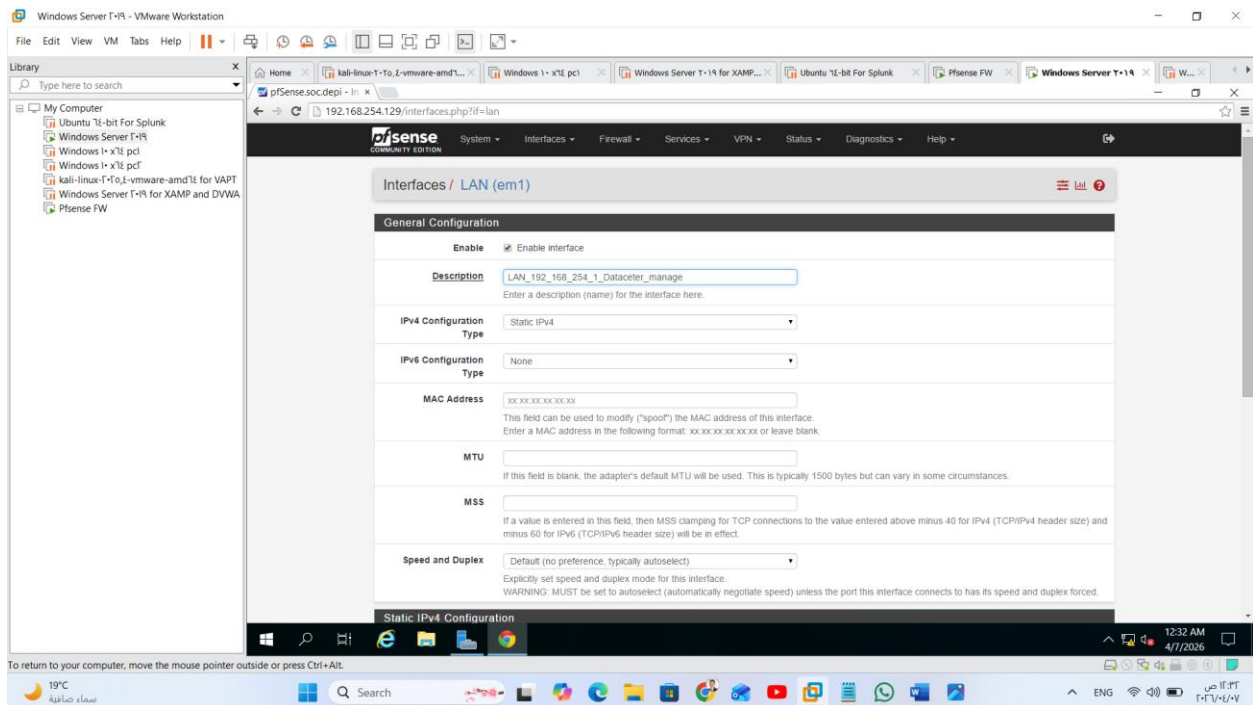

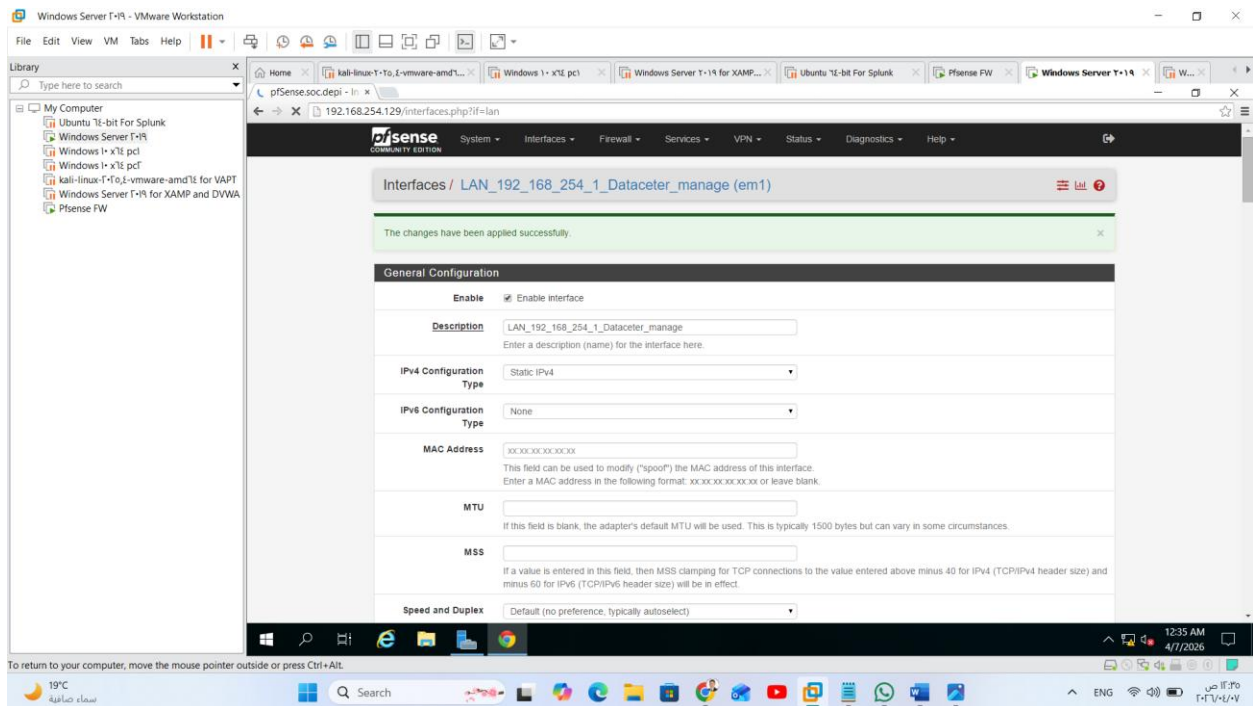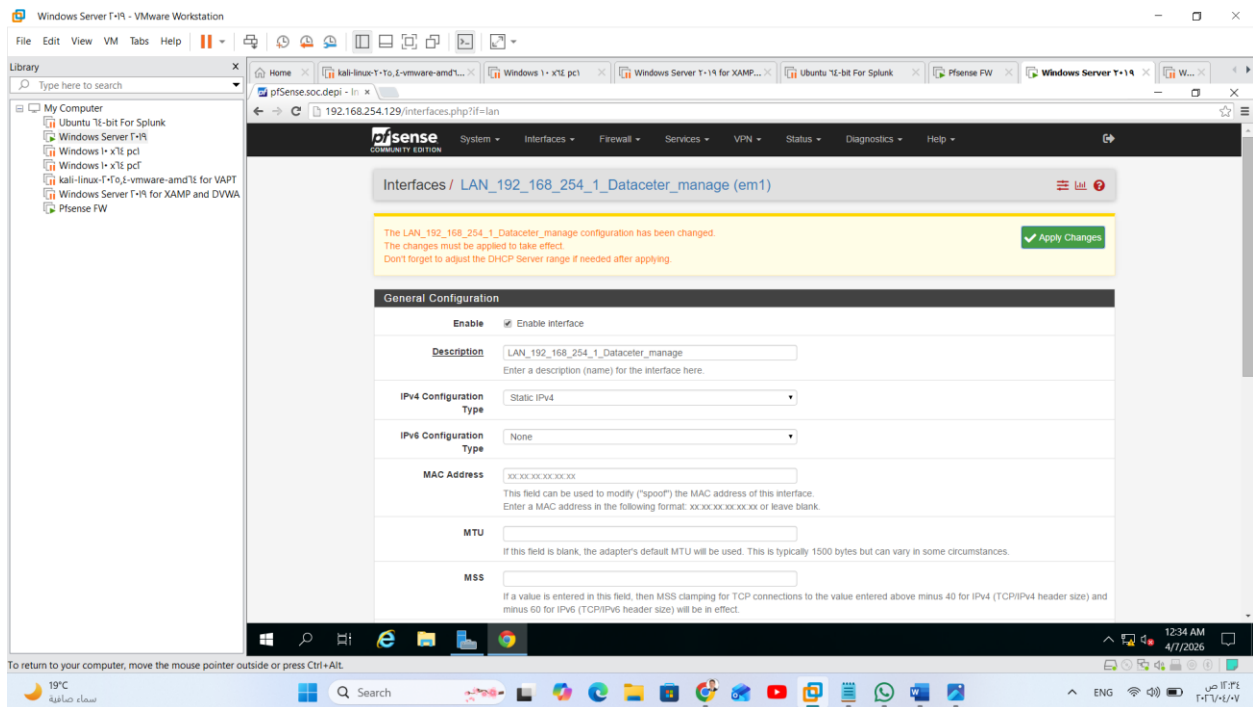

<http://192.168.254.1/>

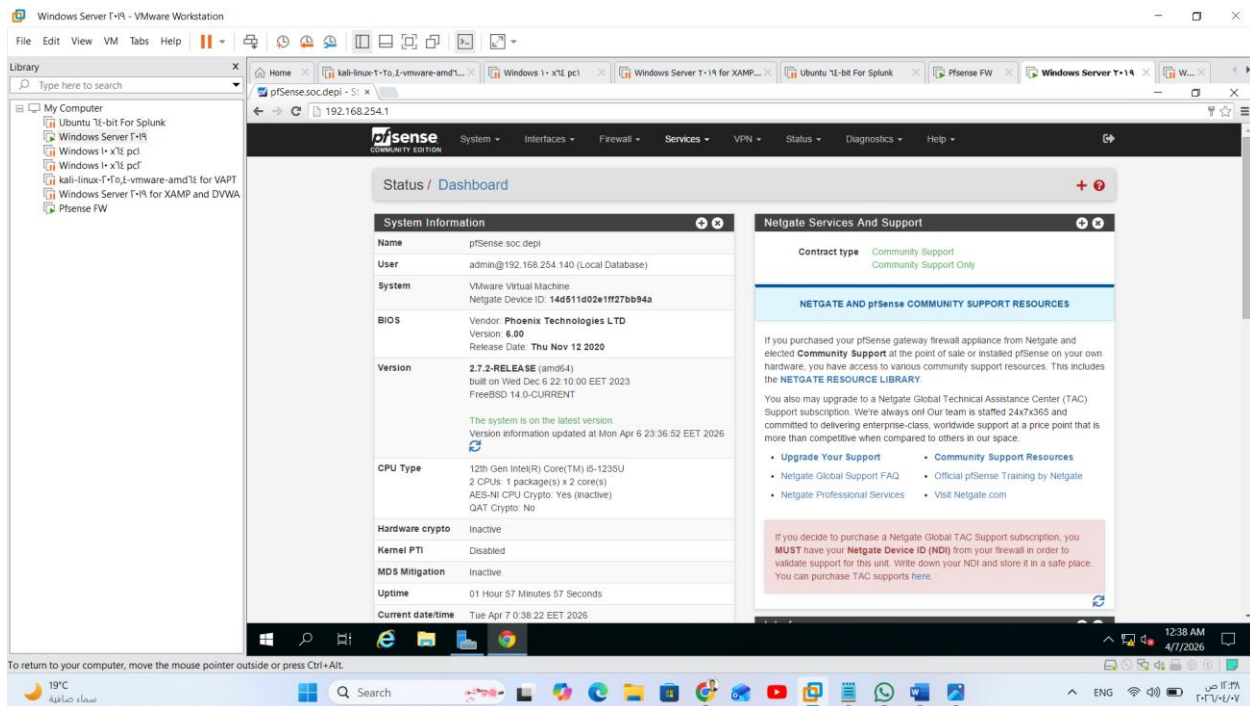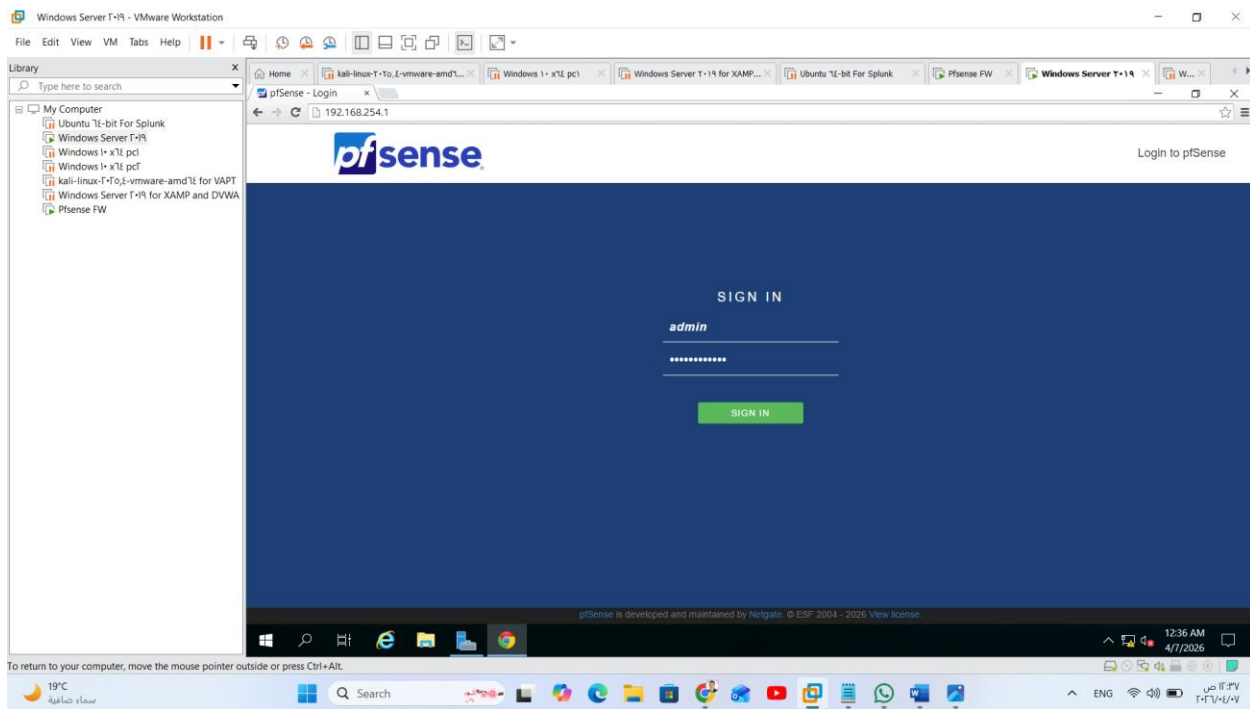

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x78 pci
- Windows 10 x78 pci
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

pfsense.soc.depi - 192.168.254.1

System Interfaces Firewall Services VPN Status Diagnostics Help

Status / Dashboard

System Information

Name	ptSense s
User	admin@19
System	VMware V Netgate Device ID: 14d51d02e1ff27b694a
BIOS	Vendor: Phoenix Technologies LTD Version: 6.00 Release Date: Thu Nov 12 2020
Version	2.7.2-RELEASE (amd64) built on Wed Dec 6 22:10:00 EET 2023 FreeBSD 14.0-CURRENT The system is on the latest version. Version information updated at Mon Apr 6 23:36:52 EET 2026
CPU Type	12th Gen Intel(R) Core(TM) i5-1235U 2 CPUs: 1 package(s) x 2 core(s) AES-NI CPU Crypto: Yes (inactive) QAT Crypto: No
Hardware crypto	Inactive
Kernel PTI	Disabled
MD5 Mitigation	Inactive
Uptime	01 Hour 58 Minutes 15 Seconds
Current datetime	Tue Apr 7 0:38:40 EET 2026

WAN_192_168_254_129_INTERNET

LAN_192_168_254_1_DATACENTER_MANAGE

OPT1

OPT2

OPT3

Netgate Services And Support

Contract type Community Support
Community Support Only

NETGATE AND pfsense COMMUNITY SUPPORT RESOURCES

If you purchased your pfsense gateway firewall appliance from Netgate and elected **Community Support** at the point of sale or installed pfsense on your own hardware, you have access to various community support resources. This includes the **NETGATE RESOURCE LIBRARY**.

You also may upgrade to a Netgate Global Technical Assistance Center (TAC) Support subscription. We're always on! Our team is staffed 24x7x365 and committed to delivering enterprise-class, worldwide support at a price point that is more than competitive when compared to others in our space.

- Upgrade Your Support
- Netgate Global Support FAQ
- Netgate Professional Services
- Community Support Resources
- Official pfsense Training by Netgate
- Visit Netgate.com

If you decide to purchase a Netgate Global TAC Support subscription, you **MUST** have your **Netgate Device ID (NDI)** from your firewall in order to validate support for this unit. Write down your NDI and store it in a safe place. You can purchase TAC supports here.

12:38 AM
4/7/2026

19°C
ساعة صافية

Search

ENG

19°C
ساعة صافية

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x78 pci
- Windows 10 x78 pci
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

pfsense.soc.depi - 192.168.254.1

System Interfaces Firewall Services VPN Status Diagnostics Help

Interfaces / DMZ_192_168_120_1 (em2)

General Configuration

Enable ☒ Enable interface

Description DMZ_192_168_120_1_Webavrv_Webapp
Enter a description (name) for the interface here.

IPv4 Configuration Type Static IPv4

IPv6 Configuration Type None

MAC Address xx:xx:xx:xx:xx:xx
This field can be used to modify ("spoof") the MAC address of this interface. Enter a MAC address in the following format: xx:xx:xx:xx:xx:xx or leave blank.

MTU
If this field is blank, the adapter's default MTU will be used. This is typically 1500 bytes but can vary in some circumstances.

MSS
If a value is entered in this field, then MSS clamping for TCP connections to the value entered above minus 40 for IPv4 (TCP/IPv4 header size) and minus 60 for IPv6 (TCP/IPv6 header size) will be in effect.

Speed and Duplex Default (no preference, typically autoselect)
Explicitly set speed and duplex mode for this interface.
WARNING: MUST be set to autoselect (automatically negotiate speed) unless the port this interface connects to has its speed and duplex forced.

Static IPv4 Configuration



1:37 AM
4/7/2026

19°C
ساعة صافية

Search

ENG

19°C
ساعة صافية

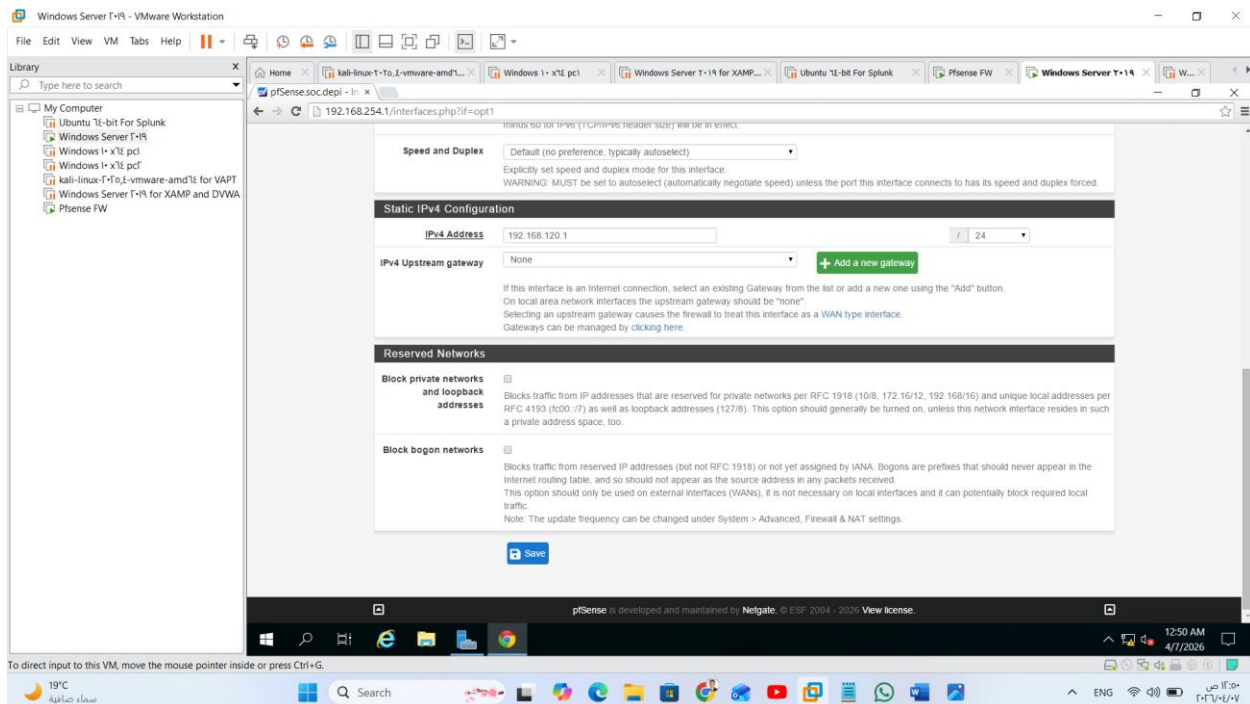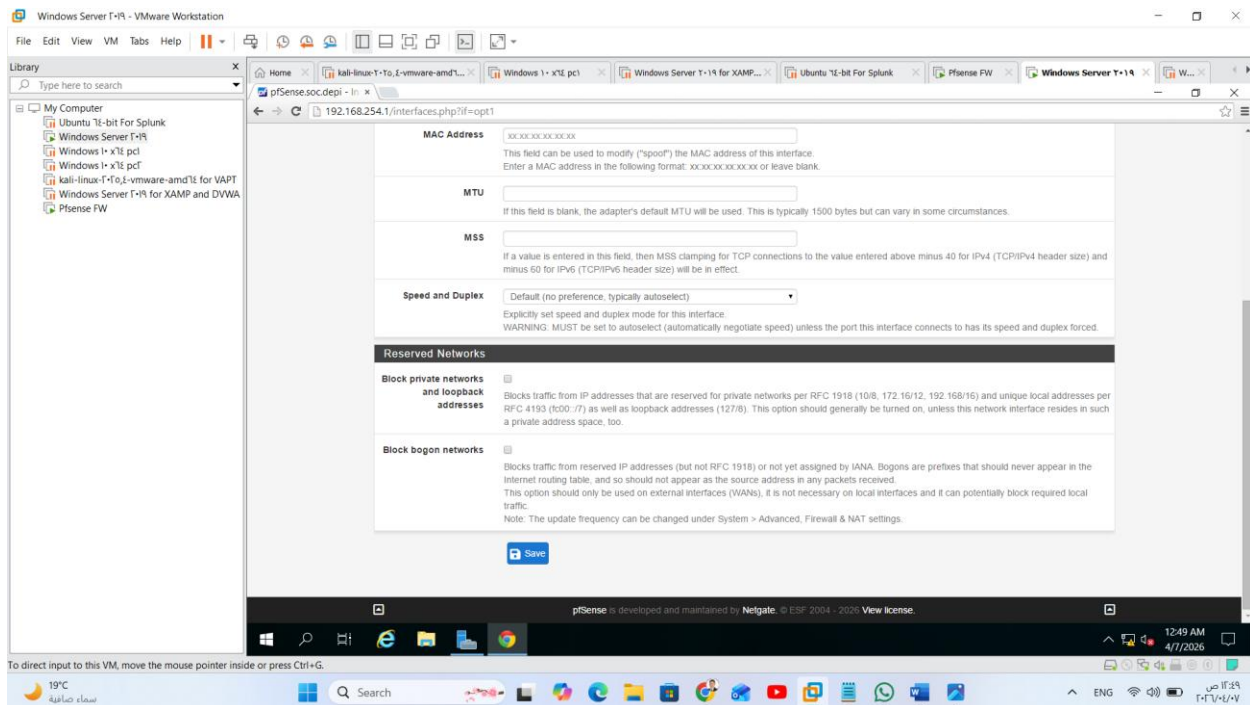

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x76 pc1
- Windows 10 x76 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.1/interfaces.php?if=opt1

System Interfaces Firewall Services VPN Status Diagnostics Help

Interfaces / DMZ_192_168_120_1_Websrv_Webapp (em2)

The changes have been applied successfully.

General Configuration

Enable	☒ Enable interface
Description	DMZ_192_168_120_1_Websrv_Webapp Enter a description (name) for the interface here.
IPv4 Configuration Type	Static IPv4
IPv6 Configuration Type	None
MAC Address	xx:xx:xx:xx:xx:xx This field can be used to modify ("spoof") the MAC address of this interface. Enter a MAC address in the following format: xx:xx:xx:xx:xx:xx or leave blank.
MTU	 If this field is blank, the adapter's default MTU will be used. This is typically 1500 bytes but can vary in some circumstances.
MSS	 If a value is entered in this field, then MSS clamping for TCP connections to the value entered above minus 40 for IPv4 (TCP/IPV4 header size) and minus 60 for IPv6 (TCP/IPV6 header size) will be in effect.
Speed and Duplex	Default (no preference, typically autoselect)

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

19°C
سواء صافية

Search

1:39 AM
4/7/2026

ENG

19°C
سواء صافية

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x76 pc1
- Windows 10 x76 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.1/interfaces.php?if=opt2

System Interfaces Firewall Services VPN Status Diagnostics Help

Interfaces / OPT2 (em3)

General Configuration

Enable	☒ Enable interface
Description	Windows_10_pc1_10_1_1_1_HR Enter a description (name) for the interface here.
IPv4 Configuration Type	Static IPv4
IPv6 Configuration Type	None
MAC Address	xx:xx:xx:xx:xx:xx This field can be used to modify ("spoof") the MAC address of this interface. Enter a MAC address in the following format: xx:xx:xx:xx:xx:xx or leave blank.
MTU	 If this field is blank, the adapter's default MTU will be used. This is typically 1500 bytes but can vary in some circumstances.
MSS	 If a value is entered in this field, then MSS clamping for TCP connections to the value entered above minus 40 for IPv4 (TCP/IPV4 header size) and minus 60 for IPv6 (TCP/IPV6 header size) will be in effect.
Speed and Duplex	Default (no preference, typically autoselect) Explicitly set speed and duplex mode for this interface. WARNING: MUST be set to autoselect (automatically negotiate speed) unless the port this interface connects to has its speed and duplex forced.

Reserved Networks

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.



19°C
سواء صافية



Search



1:06 AM
4/7/2026



ENG

19°C
سواء صافية

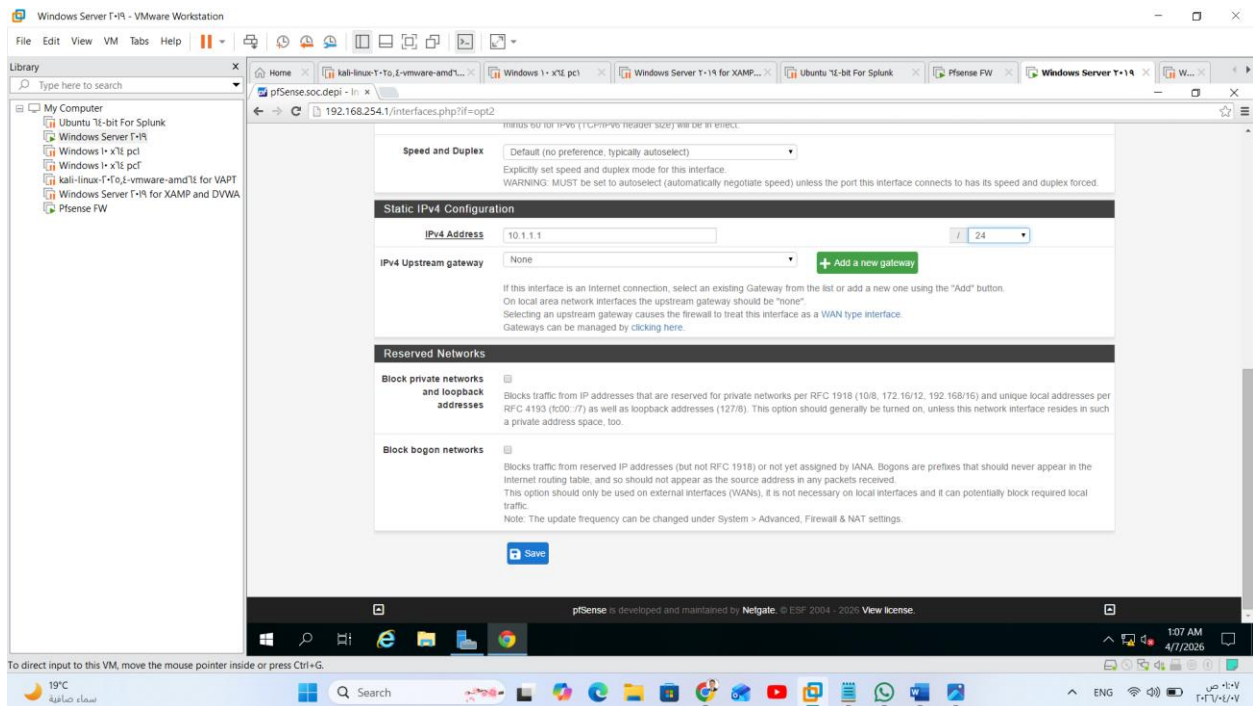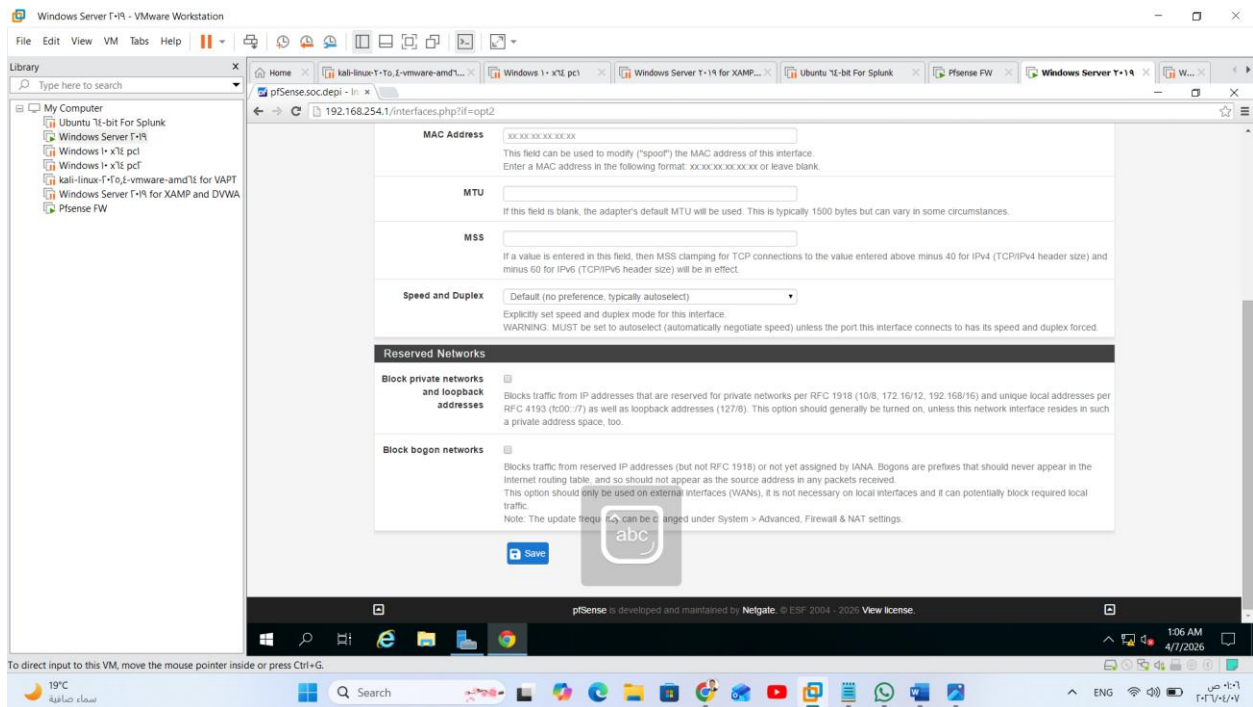

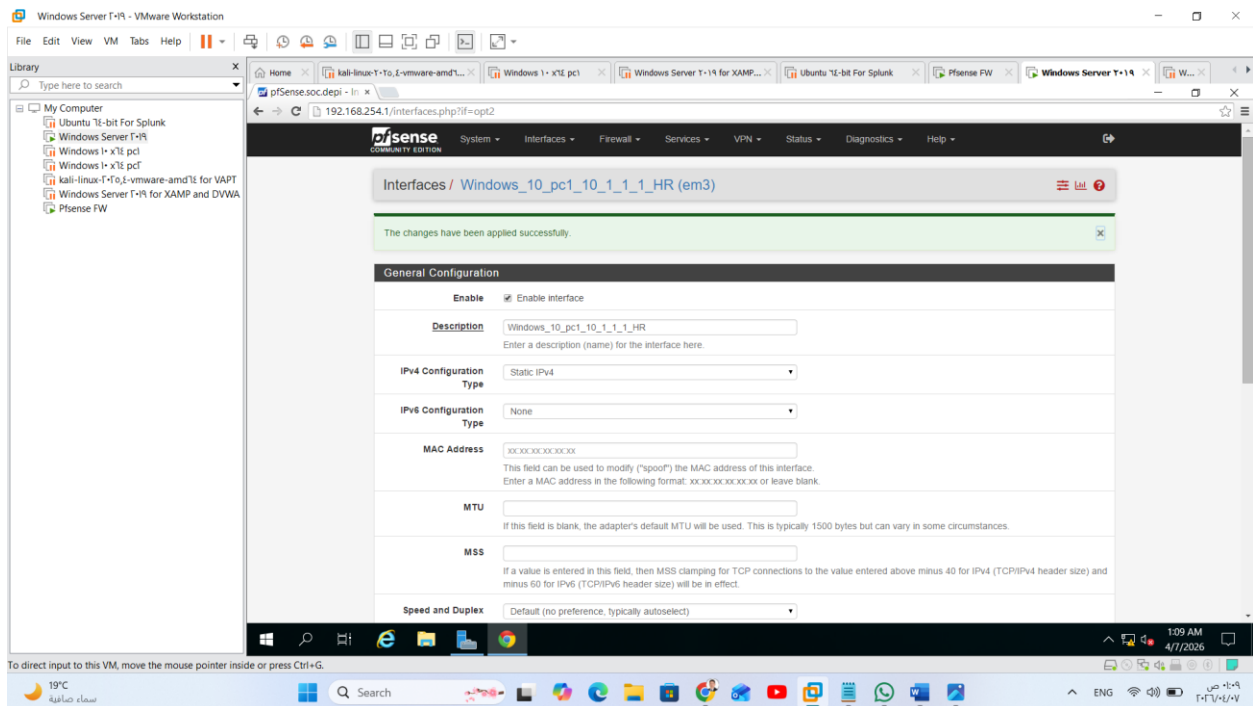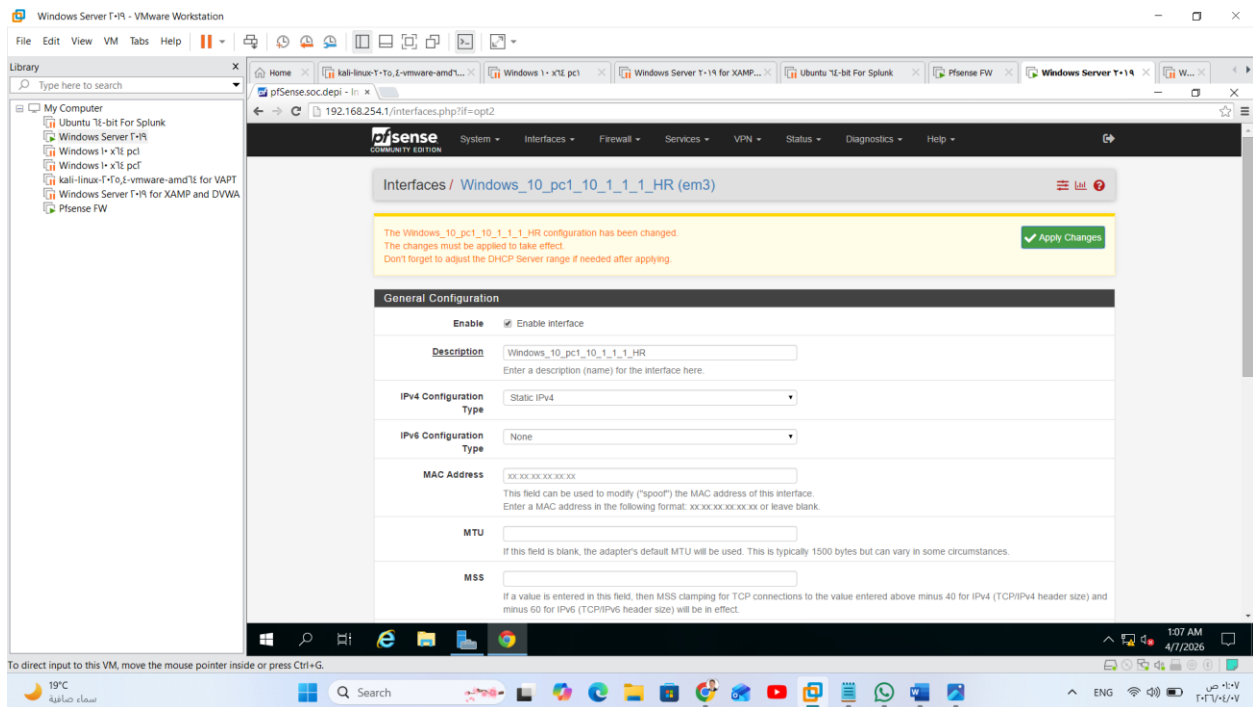

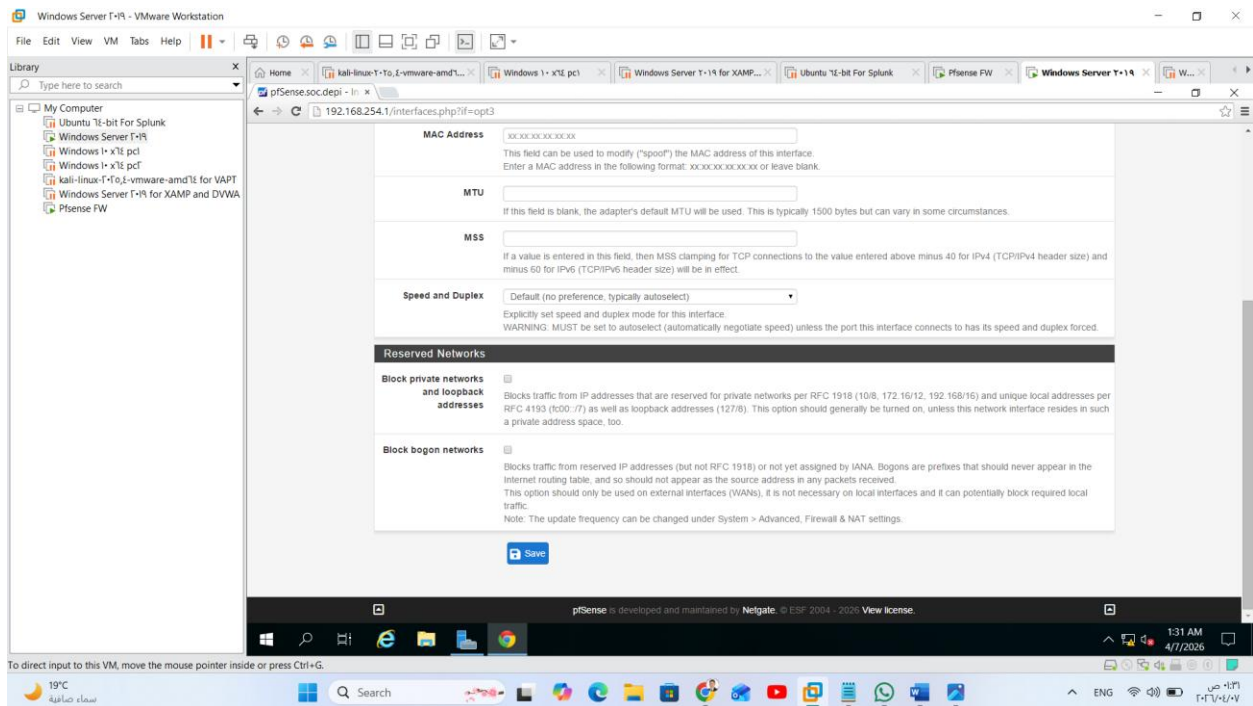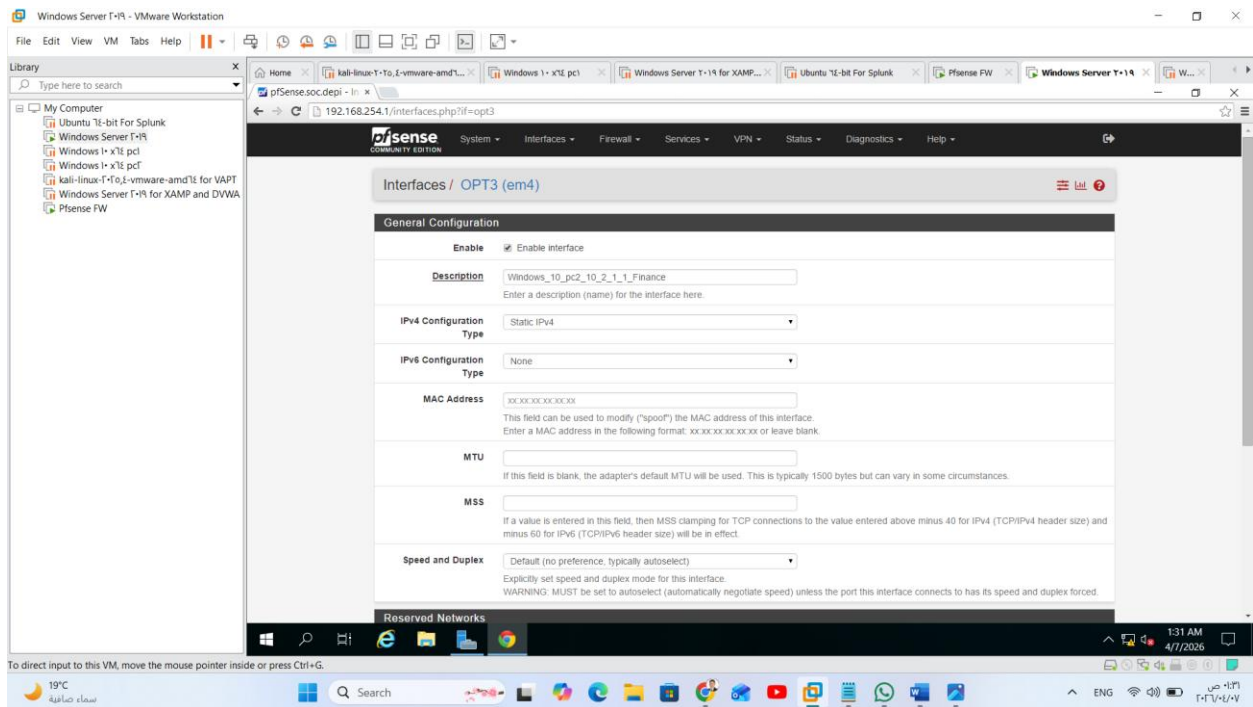

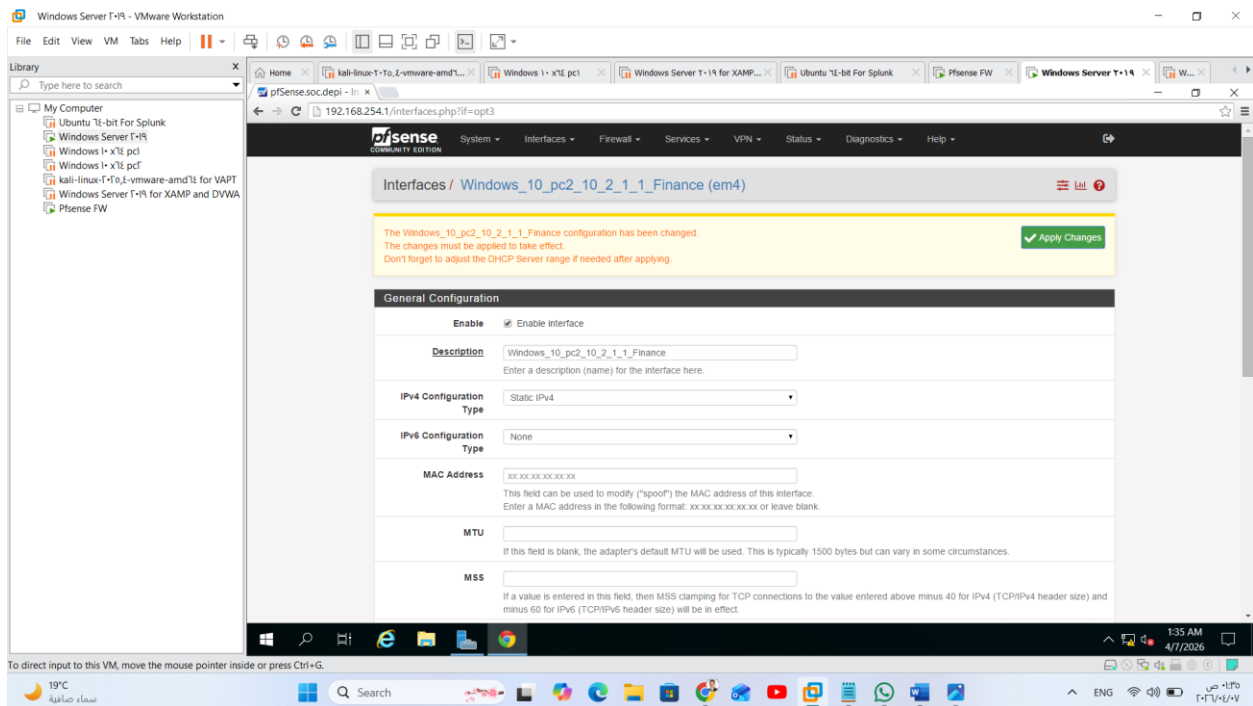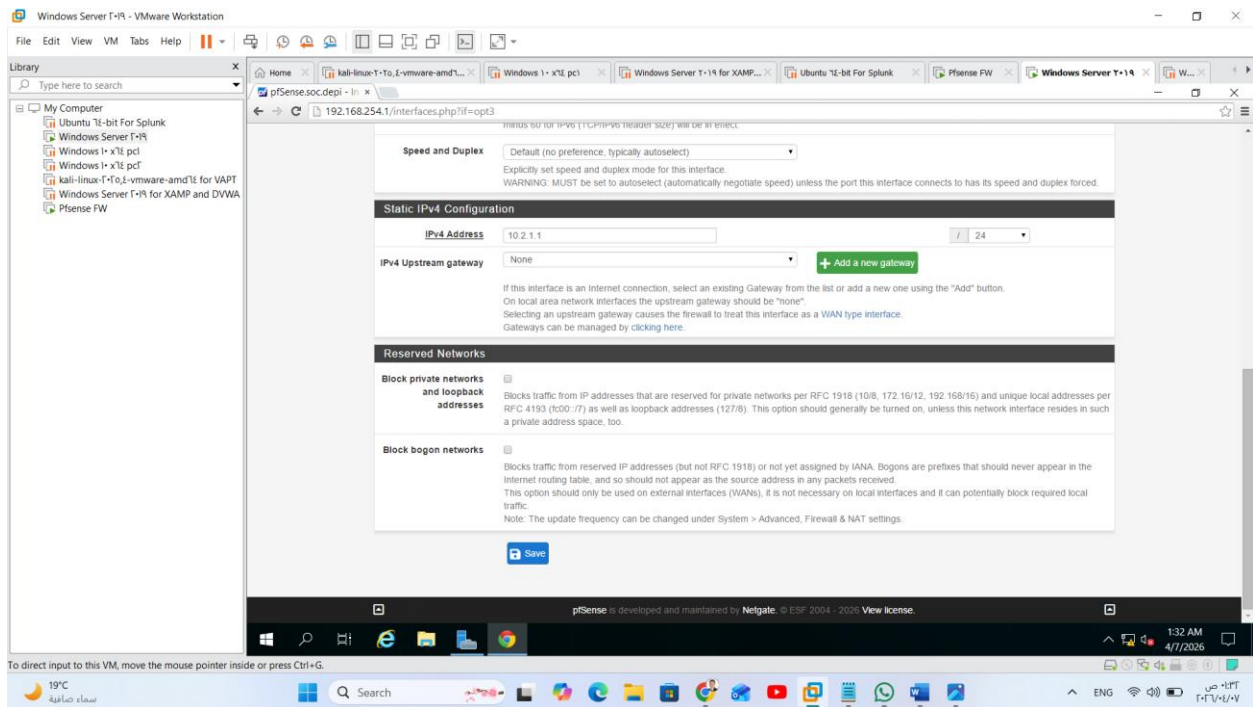

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19.1-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.1/interfaces.php?if=opt3

pfsense COMMUNITY EDITION

System Interfaces Firewall Services VPN Status Diagnostics Help

Interfaces / Windows_10_pc2_10_2_1_1_Finance (em4)

The changes have been applied successfully.

General Configuration

Enable	☒ Enable interface
Description	Windows_10_pc2_10_2_1_1_Finance Enter a description (name) for the interface here.
IPv4 Configuration Type	Static IPv4
IPv6 Configuration Type	None
MAC Address	xx:xx:xx:xx:xx:xx This field can be used to modify ("spoof") the MAC address of this interface. Enter a MAC address in the following format: xx:xx:xx:xx:xx:xx or leave blank.
MTU	 If this field is blank, the adapter's default MTU will be used. This is typically 1500 bytes but can vary in some circumstances.
MSS	 If a value is entered in this field, then MSS clamping for TCP connections to the value entered above minus 40 for IPv4 (TCP/IPV4 header size) and minus 60 for IPv6 (TCP/IPV6 header size) will be in effect.
Speed and Duplex	Default (no preference, typically autoselect)

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

19°C مساء صافية

Search

1:36 AM 4/7/2026

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19.1-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.1

pfsense COMMUNITY EDITION

System Interfaces Firewall Services VPN Status Diagnostics Help

Status / Dashboard

System Information	
Name	pfs
User	adm
System	VM
Netgate Device ID	14d511d02e1ff27b994a
BIOS	
Vendor	Phoenix Technologies LTD
Version	8.00
Release Date	Thu Nov 12 2020
Version	
2.7.3-RELEASE (amd64) built on Wed Dec 6 22:10:00 EET 2023 FreeBSD 14.0-CURRENT	
Obtaining update status	
CPU Type	
12th Gen Intel(R) Core(TM) i5-1235U 2 CPUs: 1 package(s) x 2 core(s) AES-NI CPU Crypto: Yes (inactive) QAT Crypto: No	
Hardware crypto	
Inactive	
Kernel PTI	
Disabled	
MDS Mitigation	
Inactive	
Uptime	
03 Hours 01 Minute 03 Seconds	
Current date/time	
Tue Apr 7 1:41:28 EET 2026	
DNS server(s)	
127.0.0.1	

Assignments

- WAN_192_168_254_129_INTERNET
- LAN_192_168_254_1_DATACENTER_MANAGE
- DMZ_192_168_120_1_WEBSRV_WEBAPP
- WINDOWS_10_PC1_10_1_1_HR
- WINDOWS_10_PC2_10_2_1_1_FINANCE

Netgate Services And Support

Contract type: [Community Support](#)
[Community Support Only](#)

NETGATE AND pfsense COMMUNITY SUPPORT RESOURCES

If you purchased your pfsense gateway firewall appliance from Netgate and elected **Community Support** at the point of sale or installed pfsense on your own hardware, you have access to various community support resources. This includes the **NETGATE RESOURCE LIBRARY**.

You also may upgrade to a Netgate Global Technical Assistance Center (TAC) Support subscription. We're always on! Our team is staffed 24x7x365 and committed to delivering enterprise-class, worldwide support at a price point that is more than competitive when compared to others in our space.

- [Upgrade Your Support](#)
- [Community Support Resources](#)
- [Netgate Global Support FAQ](#)
- [Official pfsense Training by Netgate](#)
- [Netgate Professional Services](#)
- [Visit Netgate.com](#)



If you decide to purchase a Netgate Global TAC Support subscription, you **MUST** have your **Netgate Device ID (NDI)** from your firewall in order to validate support for this unit. Write down your NDI and store it in a safe place. You can purchase TAC supports [here](#).



To direct input to this VM, move the mouse pointer inside or press Ctrl+G.



19°C مساء صافية

Search

1:41 AM 4/7/2026

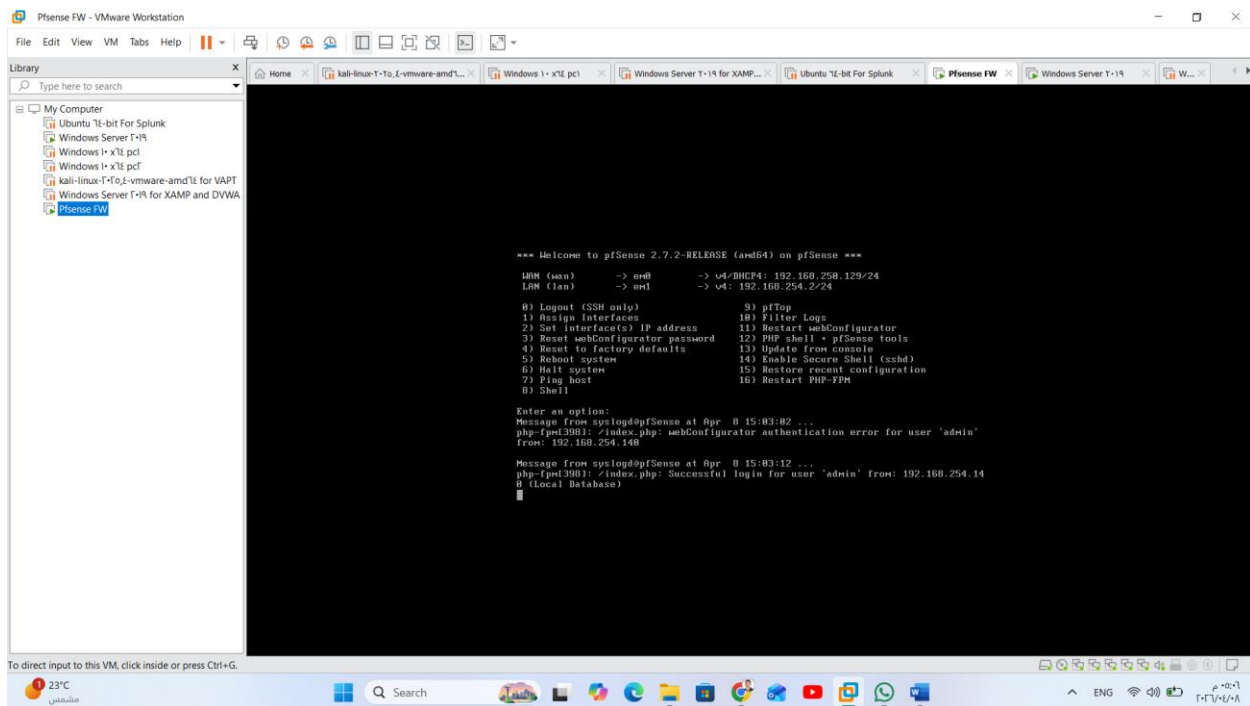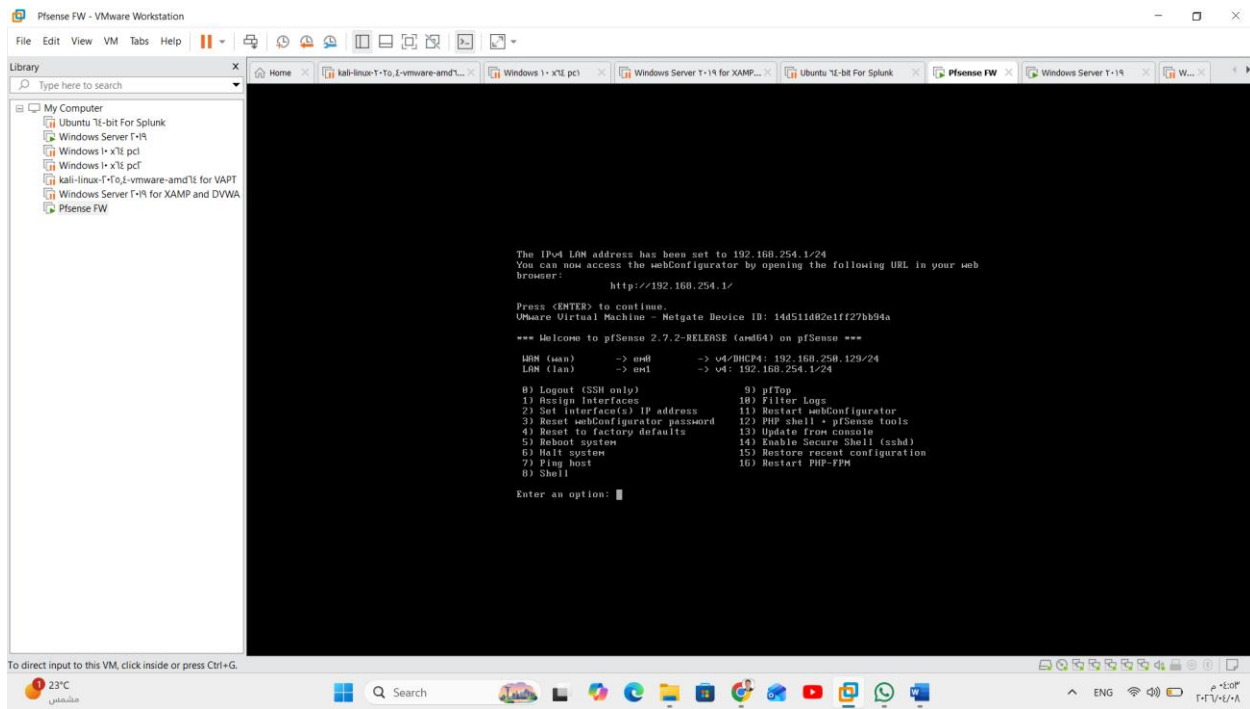

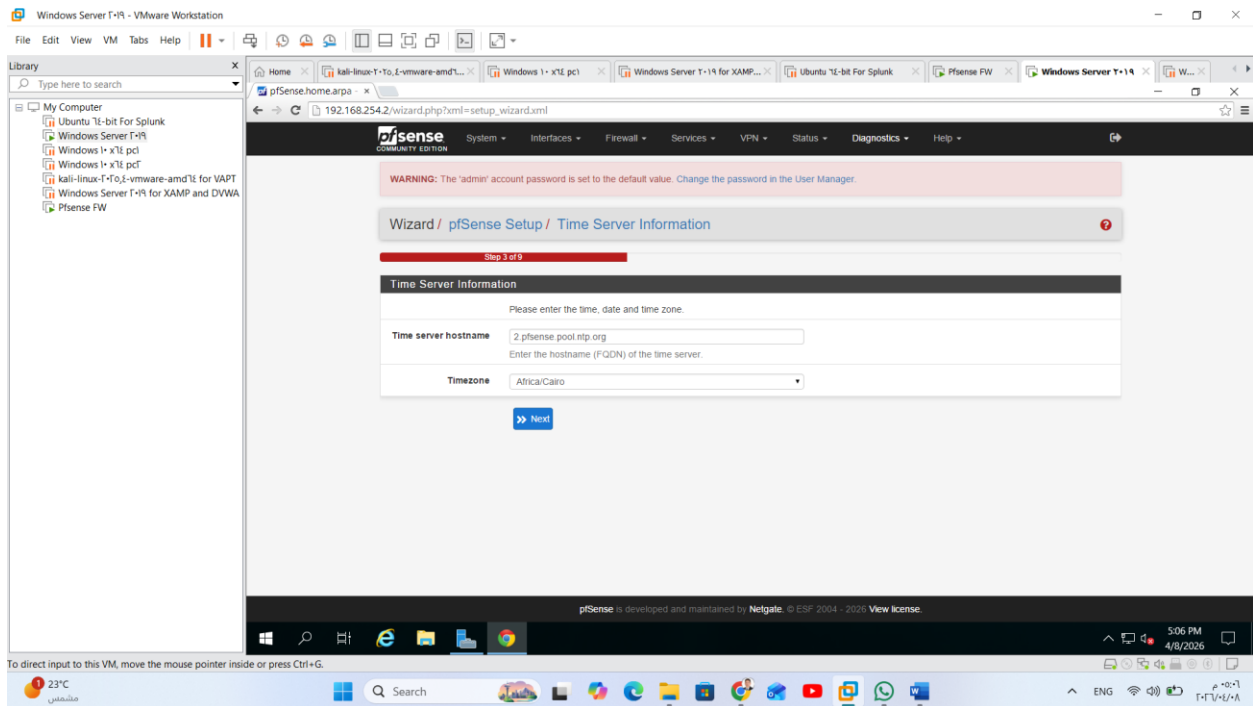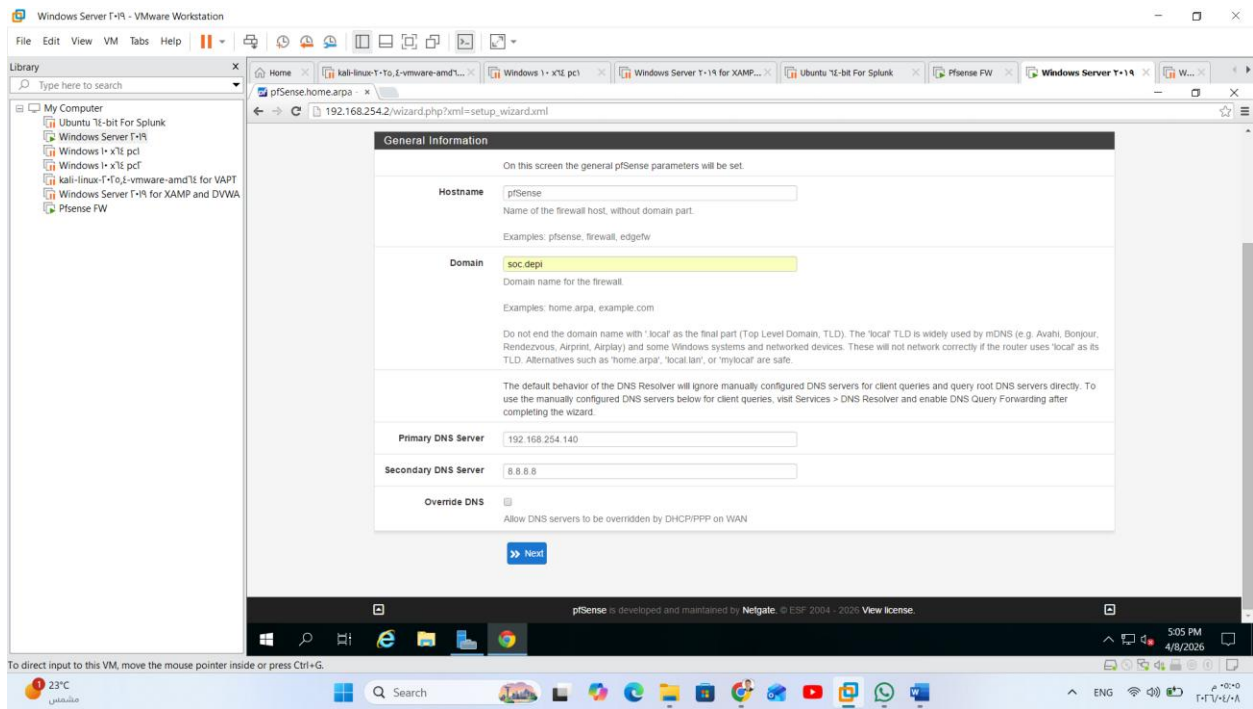

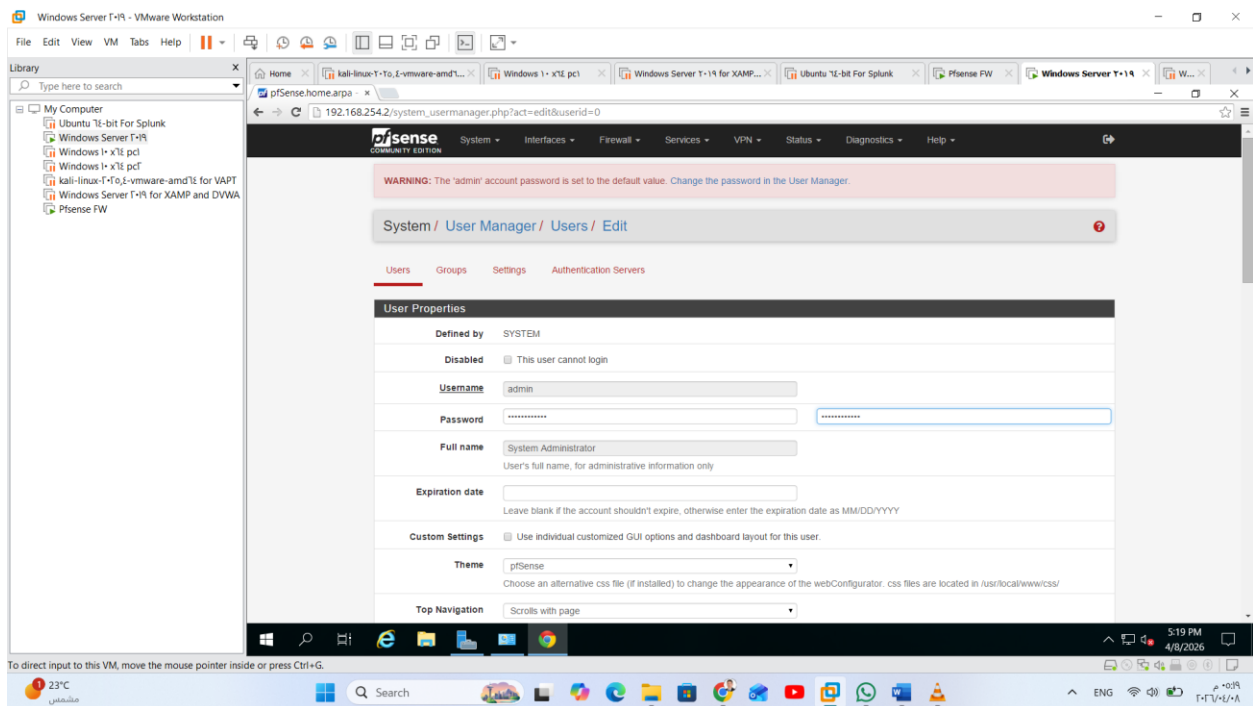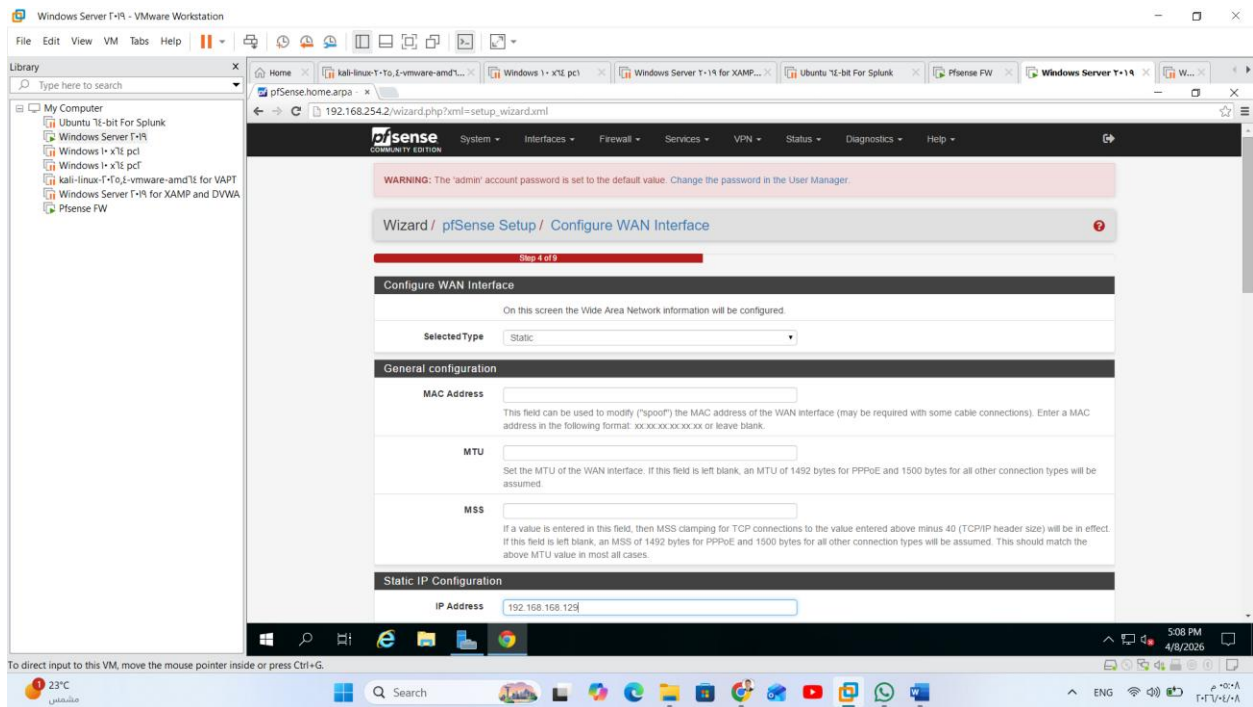

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.2/system_usermanager.php

System / User Manager / Users

Users Groups Settings Authentication Servers

Username	Full name	Status	Groups	Actions
admin	System Administrator	✓	admins	Edit

[+ Add](#) [Delete](#)

Additional users can be added here. User permissions for accessing the webConfigurator can be assigned directly or inherited from group memberships. Some system object properties can be modified but they cannot be deleted.

Accounts added here are also used for other parts of the system such as OpenVPN, IPSec, and Captive Portal.

pfsense is developed and maintained by Netgate. © 2004 - 2020 View license.

5:19 PM 4/8/2026

23°C

Search

ENG

23°C

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.2/interfaces.php?if=wlan

System / Interfaces / WAN (em0)

General Configuration

Enable ☒ Enable interface

Description WAN

IPv4 Configuration Type DHCP

IPv6 Configuration Type DHCP6

MAC Address XX:XX:XX:XX:XX:XX

MTU

MSS

Speed and Duplex Default (no preference, typically autoselect)

DHCP Client Configuration

5:21 PM 4/8/2026

23°C

Search

ENG

23°C

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- kali-linux-10.10.1-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.2/interfaces.php?if=wan

DHCP Client Configuration

☐ Options ☐ Advanced Configuration ☐ Configuration Override

Use advanced DHCP configuration options. Override the configuration from this file.

Hostname

The value in this field is sent as the DHCP client identifier and hostname when requesting a DHCP lease. Some ISPs may require this (for client identification).

Alias IPv4 address

The value in this field is used as a fixed alias IPv4 address by the DHCP client.

Reject leases from

To have the DHCP client reject offers from specific DHCP servers, enter their IP addresses here (separate multiple entries with a comma). This is useful for rejecting leases from cable modems that offer private IP addresses when they lose upstream sync.

Configuration File Override

The value in this field is the full absolute path to a DHCP client configuration file. [/{dirname}/filename.ext]

Value Substitutions in Config File: (interface), (hostname), (mac_addr_asciiCD), (mac_addr_hexCD)

Where C is Uppercase or Lowercase, and D is "-" Delimiter (space, colon, hyphen, or period) (omitted for none).

Some ISPs may require certain options be or not be sent.

DHCPv6 Client Configuration

☐ Options ☐ Advanced Configuration ☐ Configuration Override

Use advanced DHCPv6 configuration options. Override the configuration from this file.

Use IPv4 connectivity as parent interface

☐ Request a IPv6 prefix/information through the IPv4 connectivity link

Request only an IPv6 prefix

☐ Only request an IPv6 prefix, do not request an IPv6 address

DHCPv6 Prefix Delegation size

64

The value in this field is the delegated prefix length provided by the DHCPv6 server. Normally specified by the ISP.

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

23°C

Search

5:21 PM 4/8/2026

ENG

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- kali-linux-10.10.1-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

192.168.254.2/interfaces.php?if=wan

Request only an IPv6 prefix

☐ Only request an IPv6 prefix, do not request an IPv6 address

DHCPv6 Prefix Delegation size

64

The value in this field is the delegated prefix length provided by the DHCPv6 server. Normally specified by the ISP.

Send IPv6 prefix hint

☐ Send an IPv6 prefix hint to indicate the desired prefix size for delegation

Do not wait for a RA

☐ Required by some ISPs, especially those not using PPPoE

Configuration File Override

The value in this field is the full absolute path to a DHCP client configuration file. [/{dirname}/filename.ext]

Value Substitutions in Config File: (interface), (hostname), (mac_addr_asciiCD), (mac_addr_hexCD)

Where C is Uppercase or Lowercase, and D is "-" Delimiter (space, colon, hyphen, or period) (omitted for none).

Some ISPs may require certain options be or not be sent.

Reserved Networks

Block private networks and loopback addresses

☒ Blocks traffic from IP addresses that are reserved for private networks per RFC 1918 (10/8, 172.16/12, 192.168/16) and unique local addresses per RFC 4193 (fc00::/7) as well as loopback addresses (127/8). This option should generally be turned on, unless this network interface resides in such a private address space, too.

Block bogon networks

☒ Blocks traffic from reserved IP addresses (but not RFC 1918) or not yet assigned by IANA. Bogons are prefixes that should never appear in the Internet routing table, and so should not appear as the source address in any packets received. This option should only be used on external interfaces (WANs), it is not necessary on local interfaces and it can potentially block required local traffic.

Note: The update frequency can be changed under System > Advanced, Firewall & NAT settings.

Save

pfsense is developed and maintained by Netgate. © ESP 2004 - 2020. View license.



To direct input to this VM, move the mouse pointer inside or press Ctrl+G.



23°C

Search

5:21 PM 4/8/2026

ENG

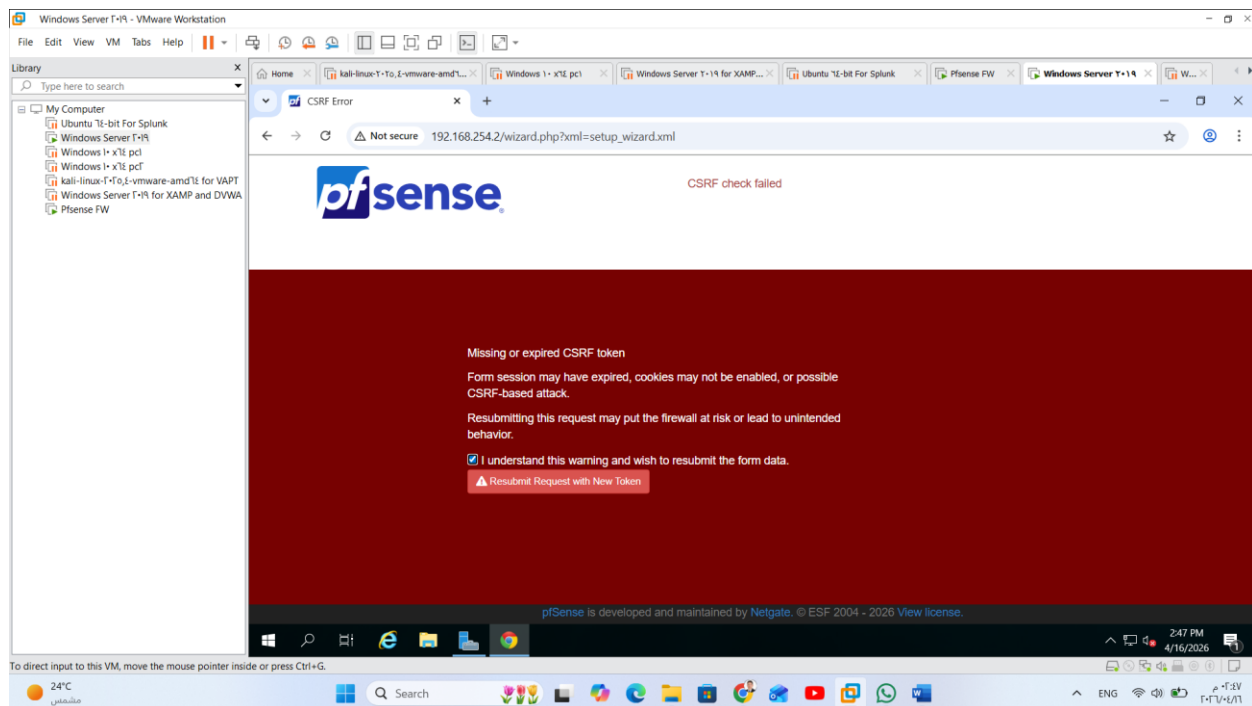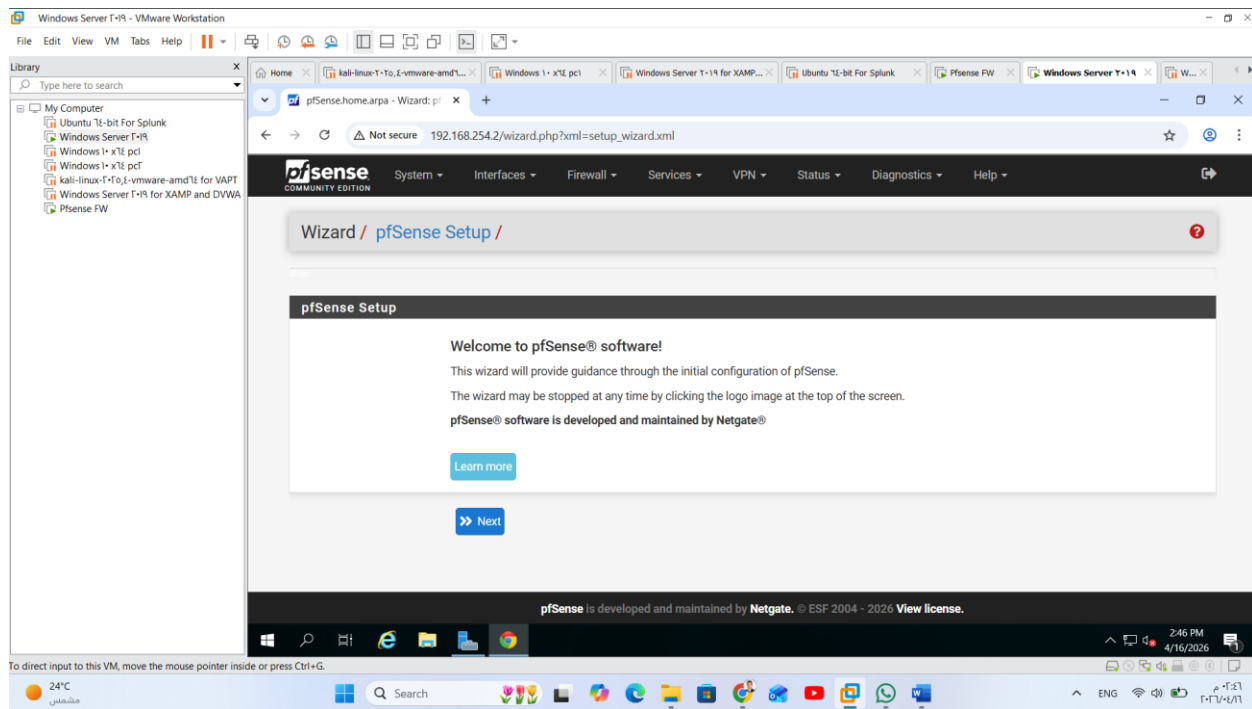

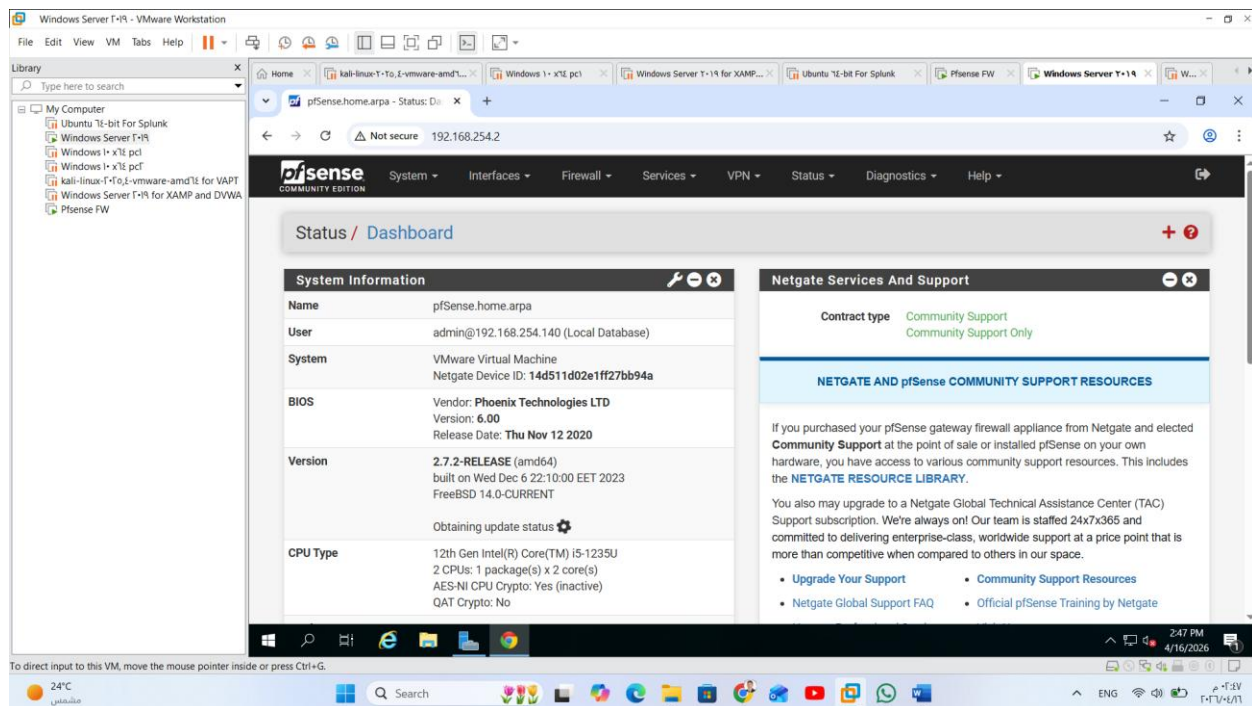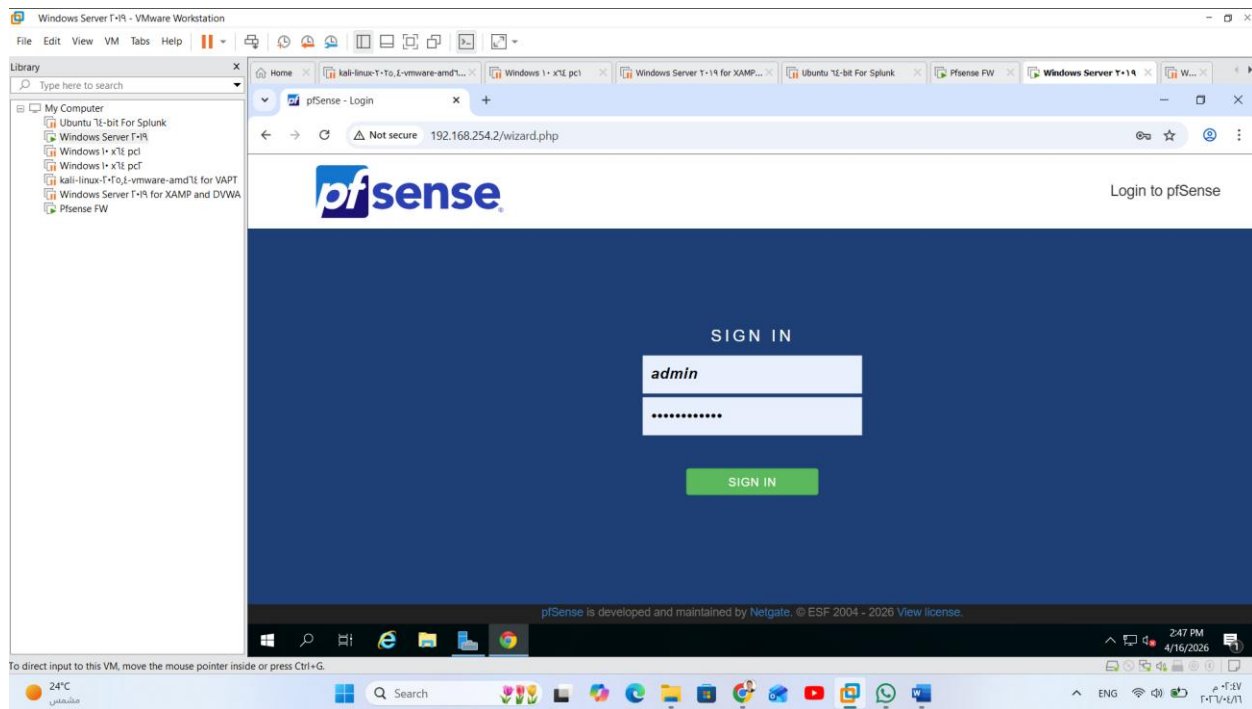

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu T1-bit For Splunk
- Windows Server T-19
- Windows 10 x78 pct
- Windows 10 x78 pct
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

Home

pfSense.home.arpa - Status: Di

Not secure 192.168.254.2

CPU Type: 12th Gen Intel(R) Core(TM) i5-1235U
2 CPUs: 1 package(s) x 2 core(s)
AES-NI CPU Crypto: Yes (inactive)
QAT Crypto: No

Hardware crypto: Inactive

Kernel PTI: Disabled

MDS Mitigation: Inactive

Uptime: 00 Hour 05 Minutes 29 Seconds

Current date/time: Thu Apr 16 14:48:19 EET 2026

DNS server(s):

- 127.0.0.1
- 192.168.254.140
- 8.8.8.8

Last config change: Wed Apr 8 18:16:19 EET 2026

State table size: 0% (40/198000) [Show states](#)

MBUF Usage: 1% (6350/1000000)

Load average: 0.21, 0.27, 0.14

CPU usage: 3%

Memory usage:

Upgrade Your Support

- Netgate Global Support FAQ
- Netgate Professional Services

Community Support Resources

- Official pfSense Training by Netgate
- Visit Netgate.com

If you decide to purchase a Netgate Global TAC Support subscription, you **MUST** have your **Netgate Device ID (NDI)** from your firewall in order to validate support for this unit. Write down your NDI and store it in a safe place. You can purchase TAC supports [here](#).

Interfaces

Interface	Speed	MAC
WAN_192_168_250_129_INTERNET	1000baseT <full-duplex>	192.168.250.129
LAN_1921682542_DATACENTER_MANAGE	1000baseT <full-duplex>	192.168.254.2
DMZ_1921681201_WEBSRV_WEBAPP	1000baseT <full-duplex>	192.168.120.1
WINDOWS10_PC1_10_1_1_HR	1000baseT <full-duplex>	10.1.1.1
WINDOWS10_PC2_10_2_1_1_FINANCE	1000baseT <full-duplex>	10.2.1.1

24°C

248 PM 4/16/2026

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu T1-bit For Splunk
- Windows Server T-19
- Windows 10 x78 pct
- Windows 10 x78 pct
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

Home

pfSense.home.arpa - Status: Di

Not secure 192.168.254.2

DNS server(s):

- 192.168.254.140
- 8.8.8.8

Last config change: Wed Apr 8 18:16:19 EET 2026

State table size: 0% (26/198000) [Show states](#)

MBUF Usage: 1% (6350/1000000)

Load average: 0.31, 0.28, 0.15

CPU usage: 4%

Memory usage: 18% of 1985 MiB

SWAP usage: 0% of 1024 MiB

Disks



Mount	Used	Size	Usage
/	817M	34G	2% of 34G (zfs)



pfSense is developed and maintained by Netgate. © ESF 2004 - 2026 [View license](#).



24°C



248 PM 4/16/2026



To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

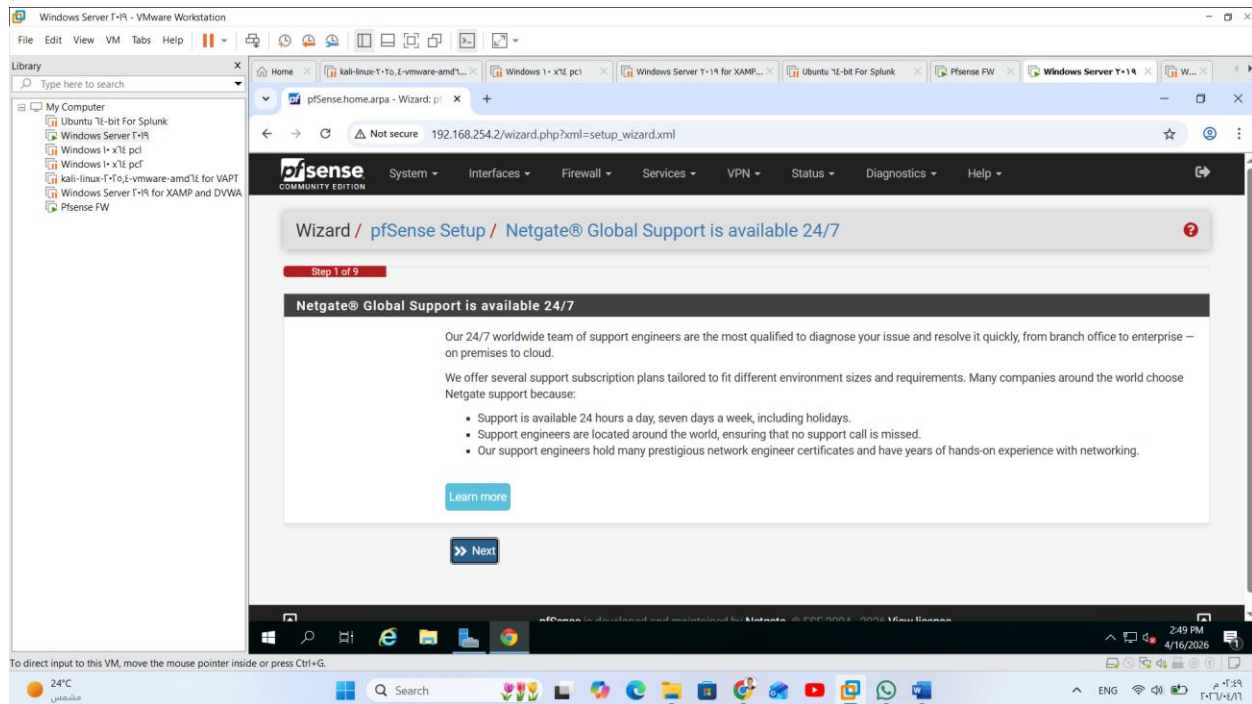
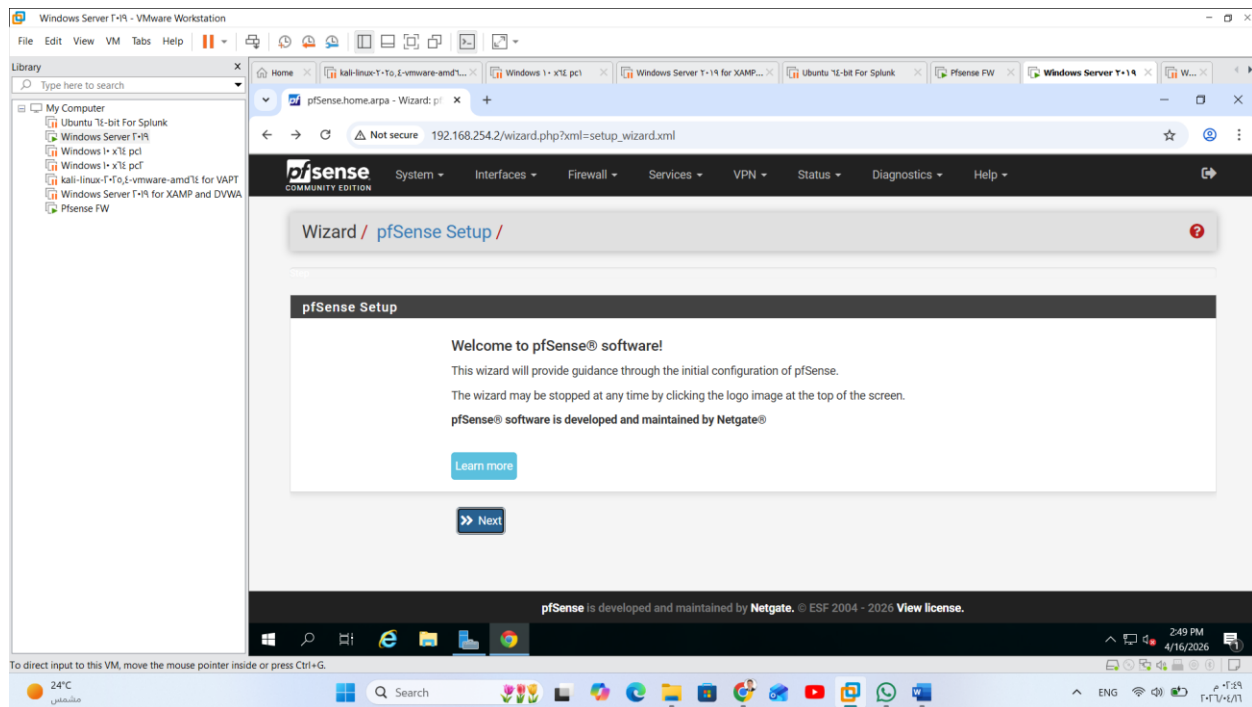


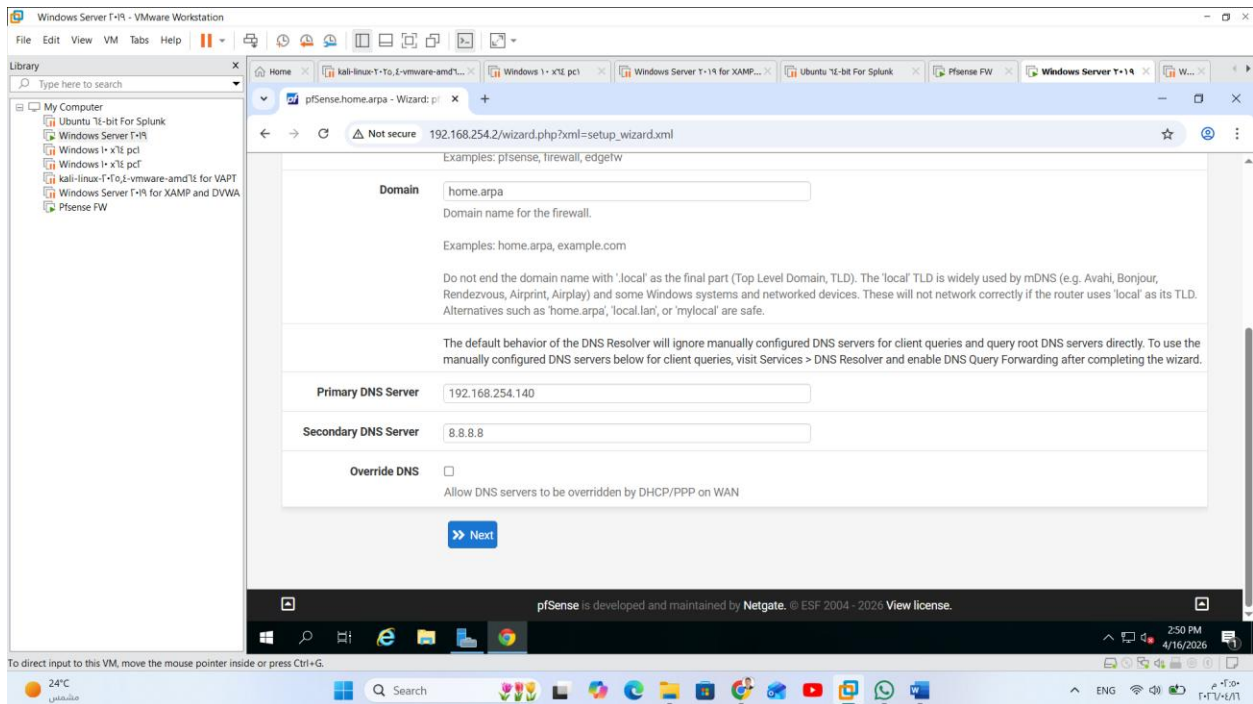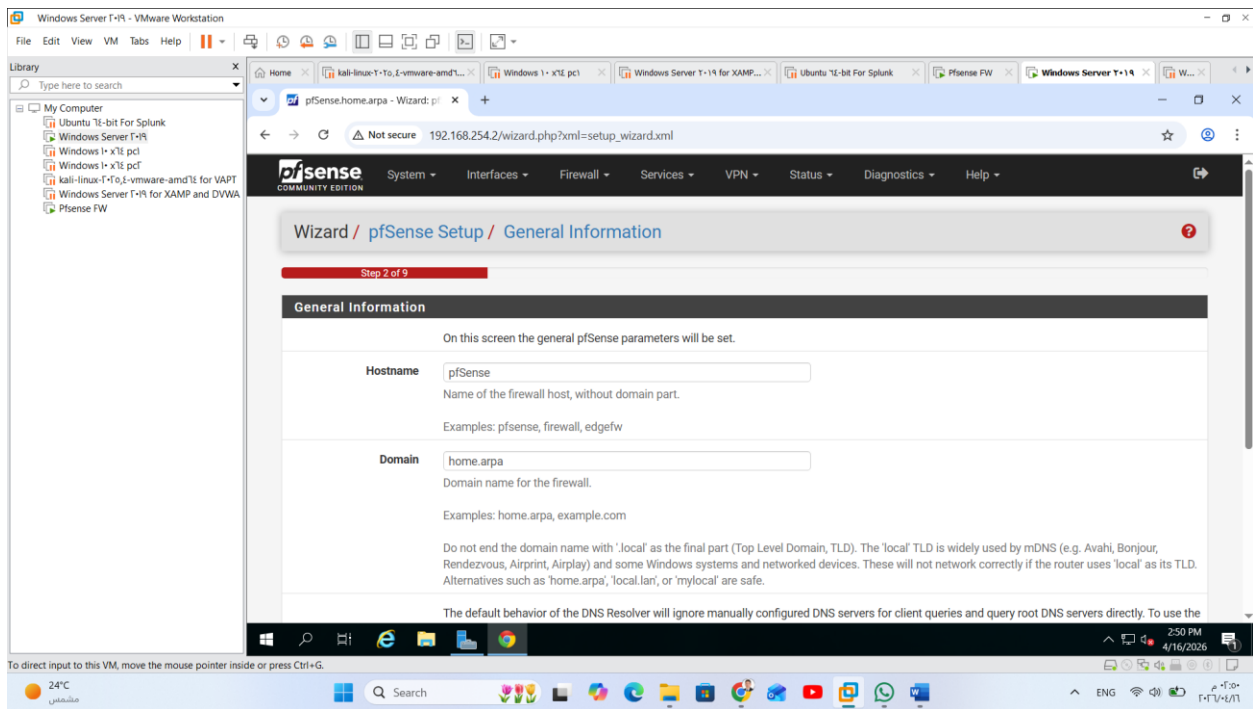

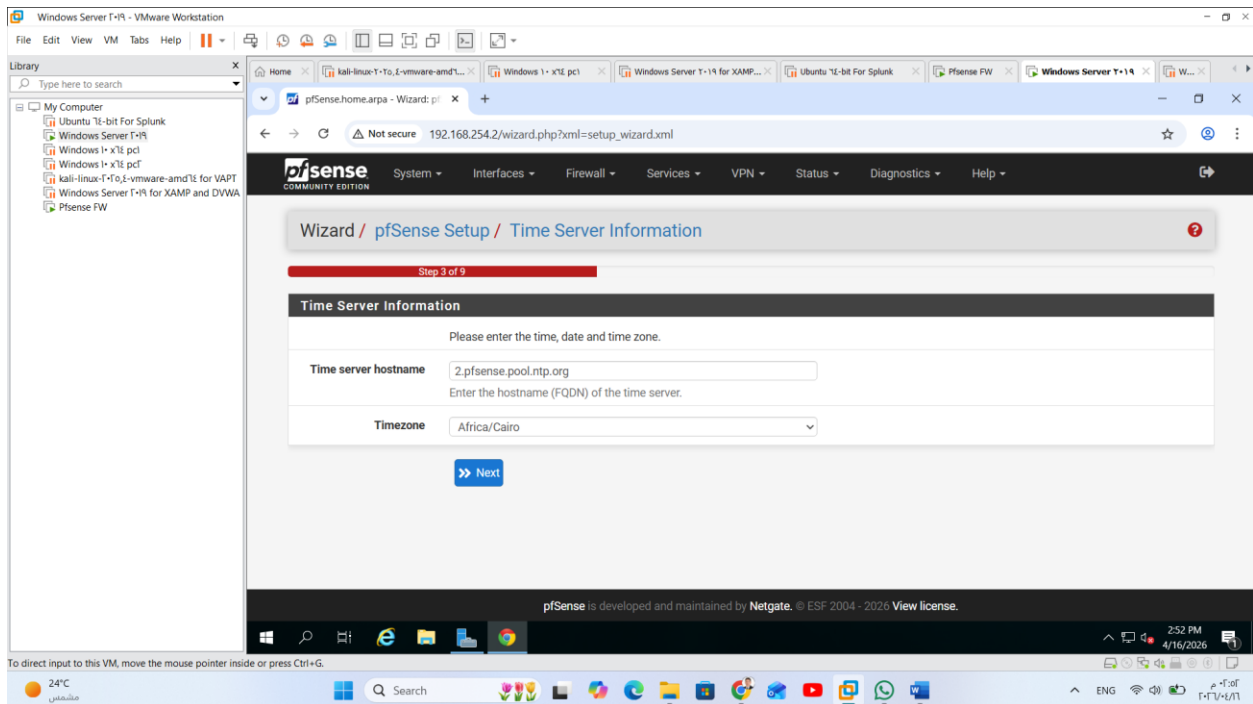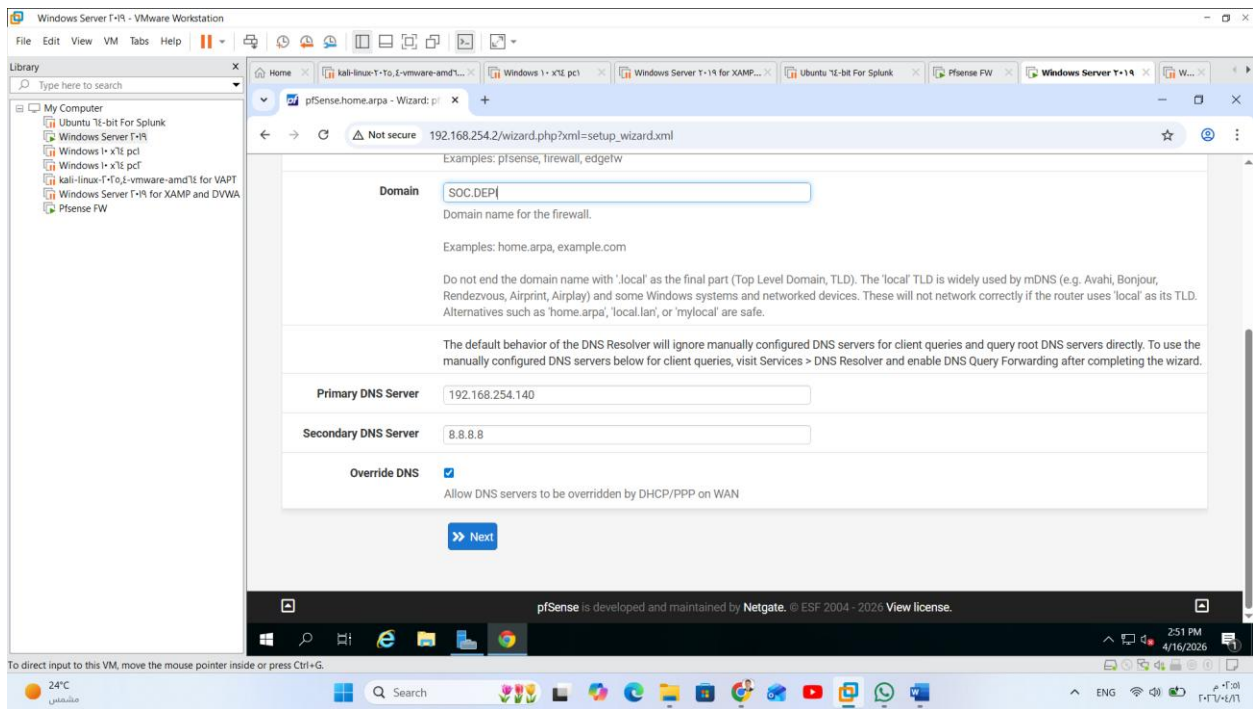

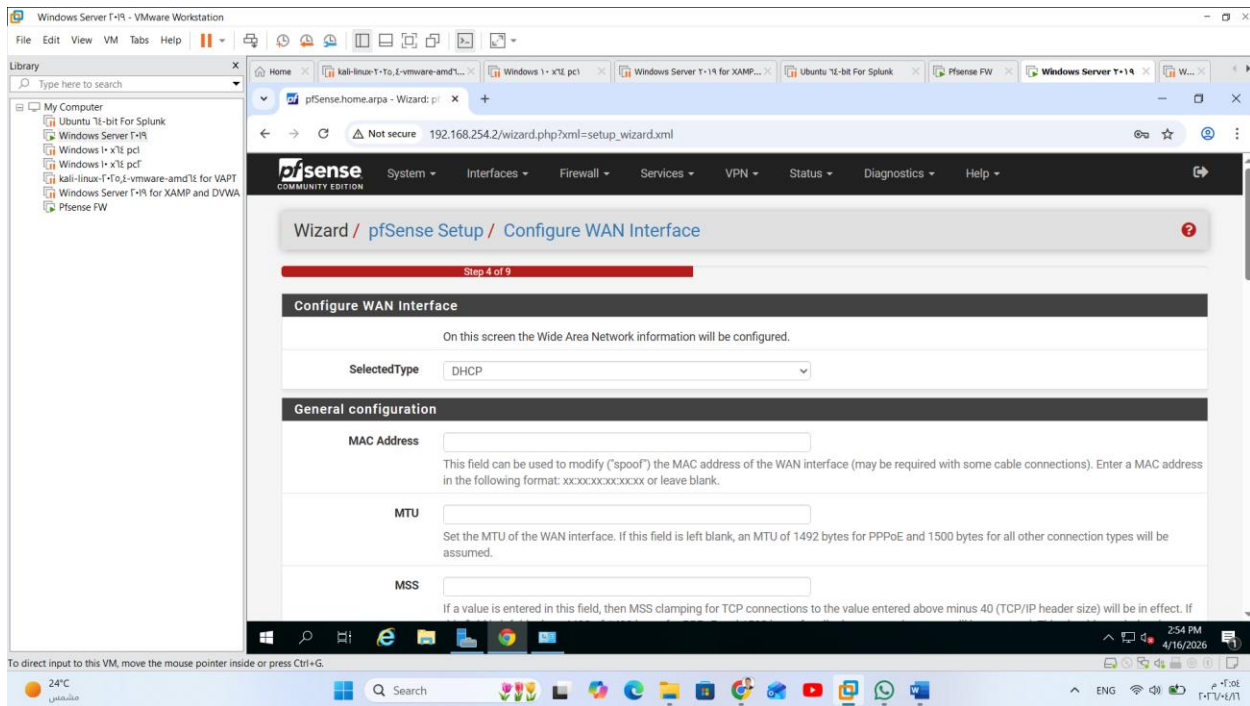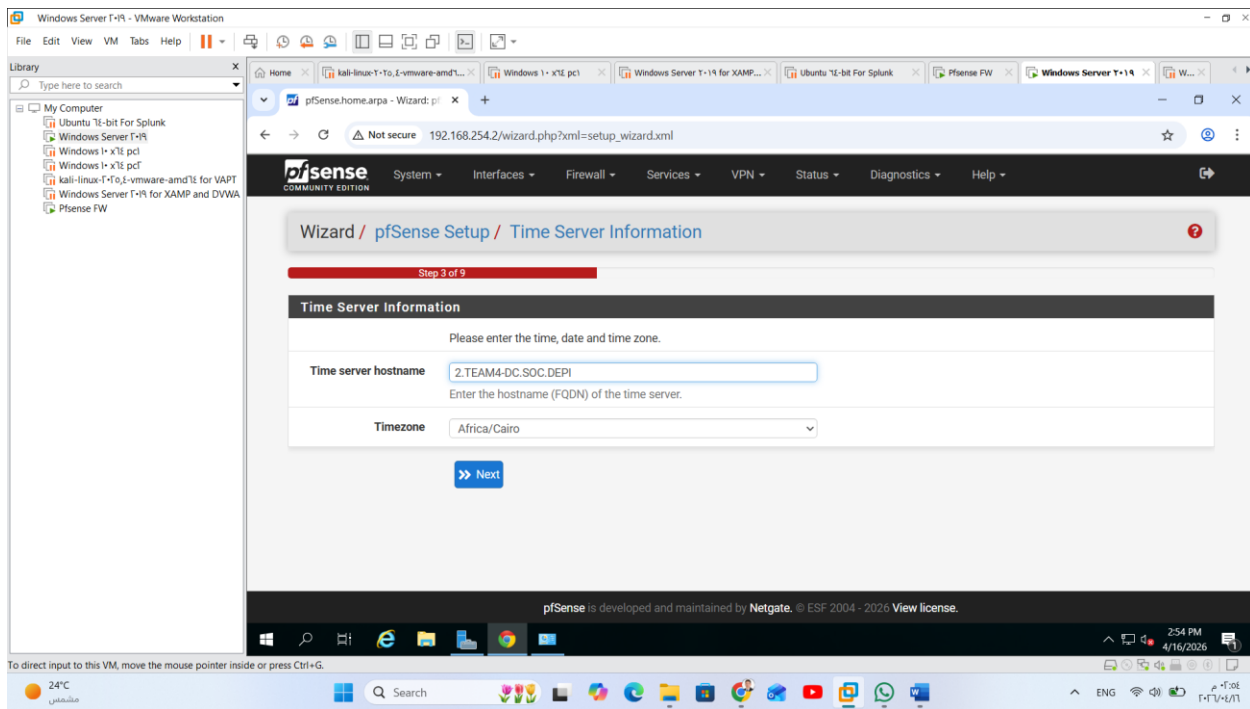

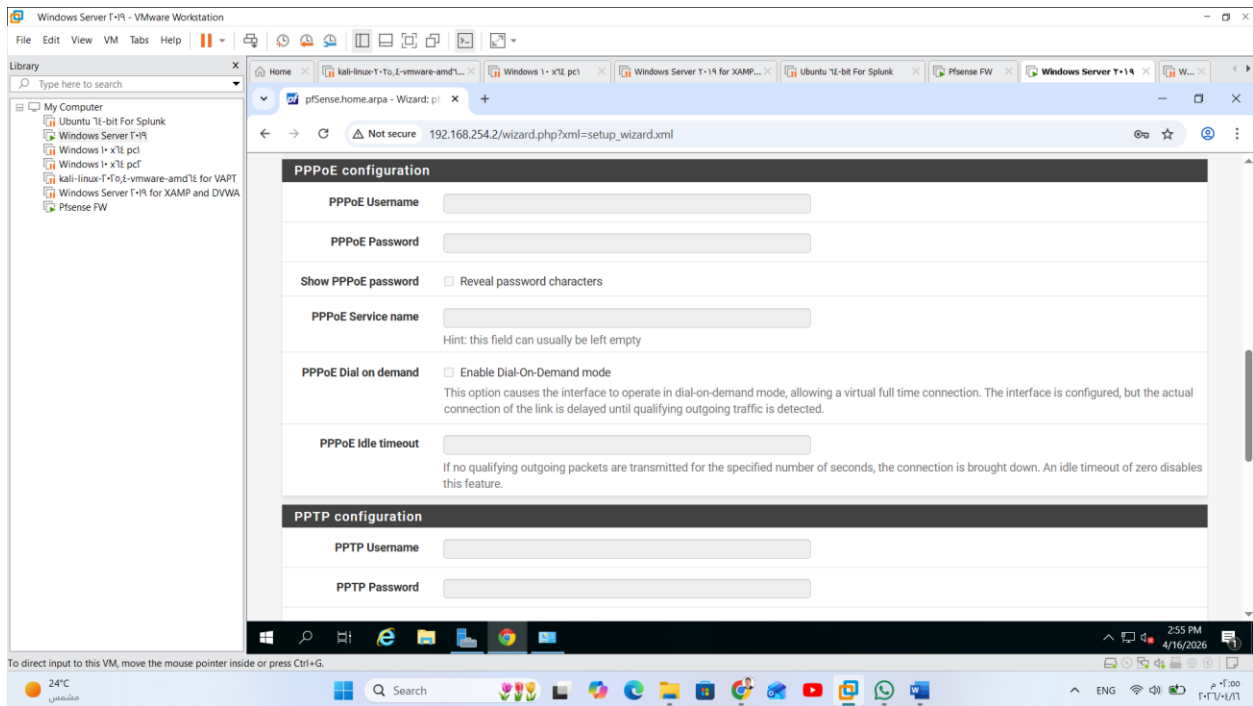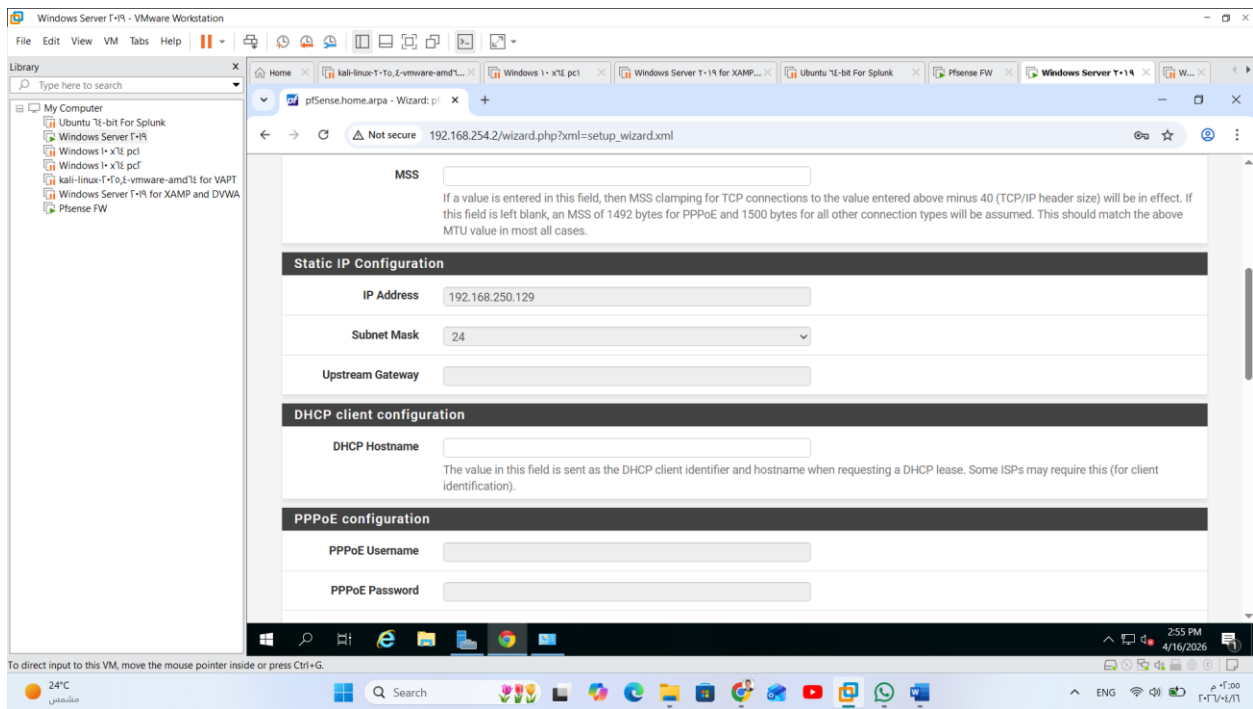

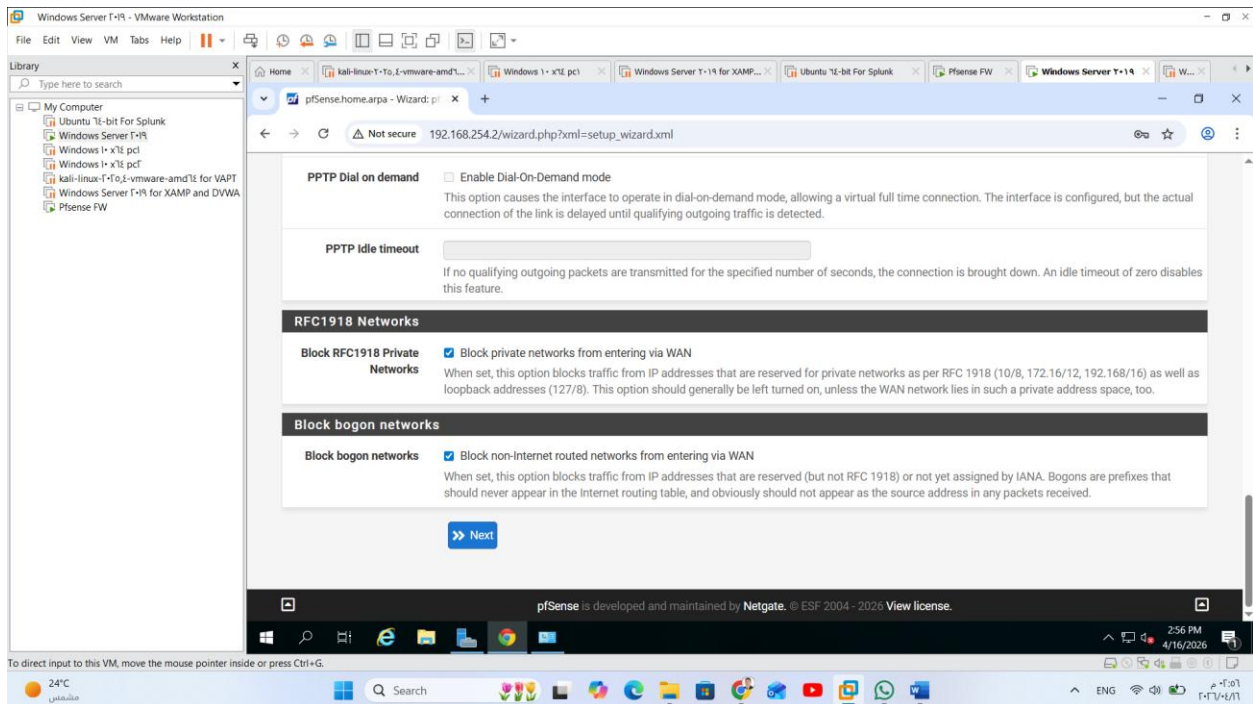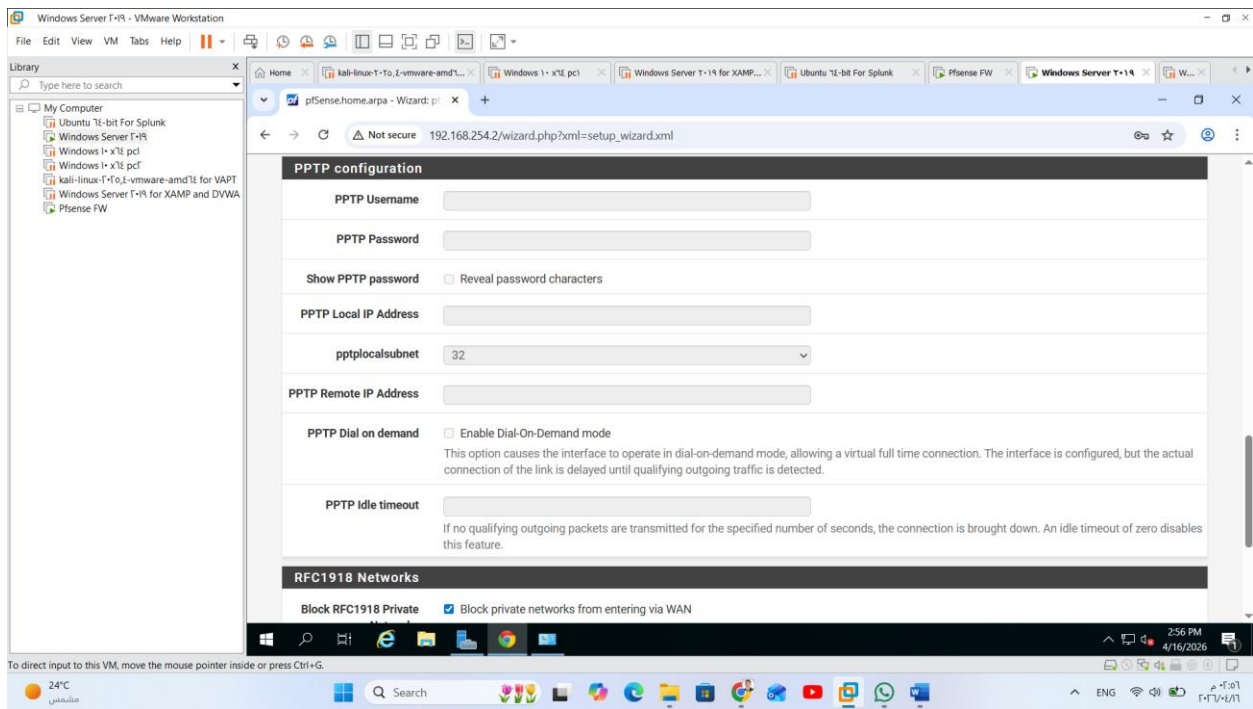

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

pfSense.home.arpa - Wizard: pf

192.168.254.2/wizard.php?xml=setup_wizard.xml

pfSense COMMUNITY EDITION

System Interfaces Firewall Services VPN Status Diagnostics Help

Wizard / pfSense Setup / Configure LAN Interface

Step 5 of 9

Configure LAN Interface

On this screen the Local Area Network information will be configured.

LAN IP Address 192.168.254.2

Type dhcp if this interface uses DHCP to obtain its IP address.

Subnet Mask 24

>> Next

pfSense is developed and maintained by Netgate. © ESF 2004 - 2026 View license.

2:57 PM 4/16/2026

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

24°C مشغول

Search

ENG

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

pfSense.home.arpa - Wizard: pf

192.168.254.2/wizard.php?xml=setup_wizard.xml

pfSense COMMUNITY EDITION

System Interfaces Firewall Services VPN Status Diagnostics Help

Wizard / pfSense Setup / Set Admin WebGUI Password

Step 6 of 9

Set Admin WebGUI Password

On this screen the admin password will be set, which is used to access the WebGUI and also SSH services if enabled.

Admin Password

Admin Password AGAIN

>> Next

pfSense is developed and maintained by Netgate. © ESF 2004 - 2026 View license.



2:57 PM 4/16/2026

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

24°C مشغول

Search

ENG

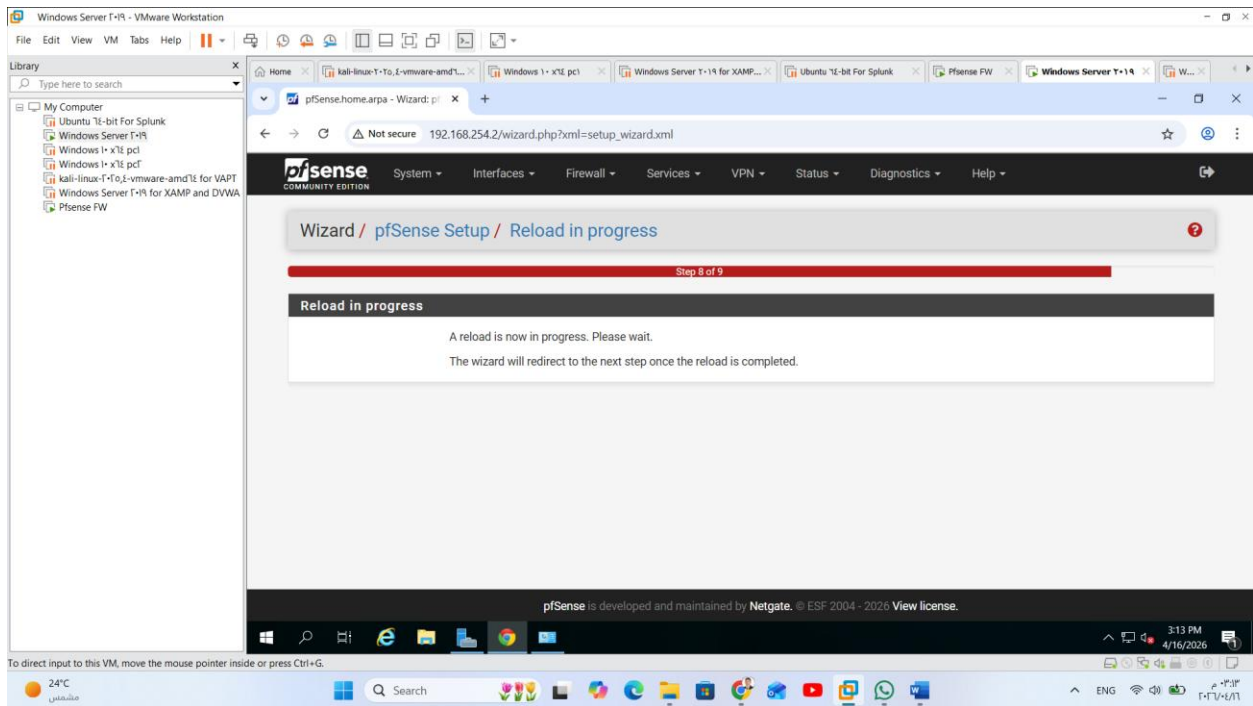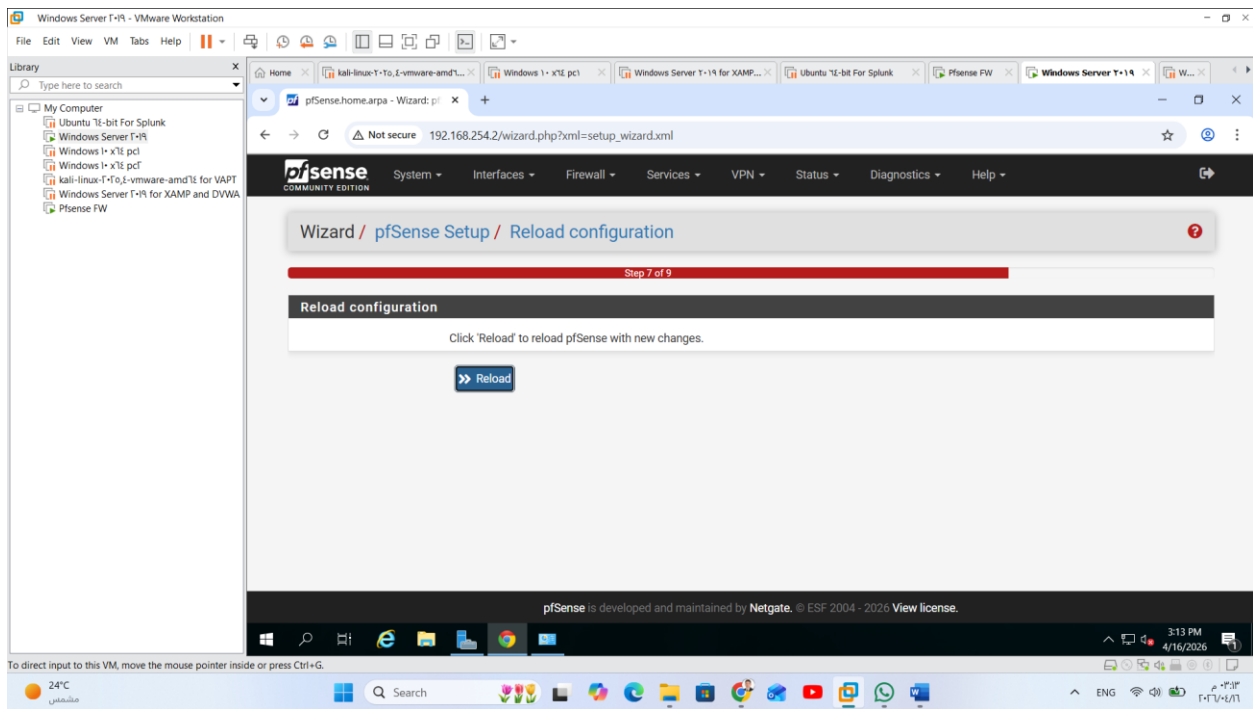

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

pfSense.SOC.DEPI - Wizard: pfSense

192.168.254.2/wizard.php?xml=setup_wizard.xml&stepid=9

pfSense COMMUNITY EDITION

System Interfaces Firewall Services VPN Status Diagnostics Help

Wizard / pfSense Setup / Wizard completed.

Step 9 of 9

Wizard completed.

Congratulations! pfSense is now configured.

We recommend that you check to see if there are any software updates available. Keeping your software up to date is one of the most important things you can do to maintain the security of your network.

[Check for updates](#)

Remember, we're here to help.

[Click here](#) to learn about Netgate 24/7/365 support services.

User survey

Please help all the people involved in improving and expanding pfSense software by taking a moment to answer this short survey (all answers are anonymous)

[Anonymous User Survey](#)

24°C مشمس

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

Windows Server T-19 - VMware Workstation

File Edit View VM Tabs Help

Library

Type here to search

My Computer

- Ubuntu 16-bit For Splunk
- Windows Server T-19
- Windows 10 x86 pc1
- Windows 10 x86 pc2
- kali-linux-T-19-vmware-amd64 for VAPT
- Windows Server T-19 for XAMP and DVWA
- Pfsense FW

pfSense.SOC.DEPI - System: Up

192.168.254.2/pkg_mgr_install.php?id=firmware

pfSense COMMUNITY EDITION

System Interfaces Firewall Services VPN Status Diagnostics Help

System / Update / System Update

System Update Update Settings

Confirmation Required to update pfSense system.

Branch Previous Stable Version (2.7.2)

Please select the branch from which to update the system firmware. Use of the development version is at your own risk!

Current Base System 2.7.2

Latest Base System 2.7.2

Status Up to date.

pfSense is developed and maintained by Netgate. © ESF 2004 - 2026 View license.

24°C مشمس

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.