


ESP32-S3-DevKitC-1

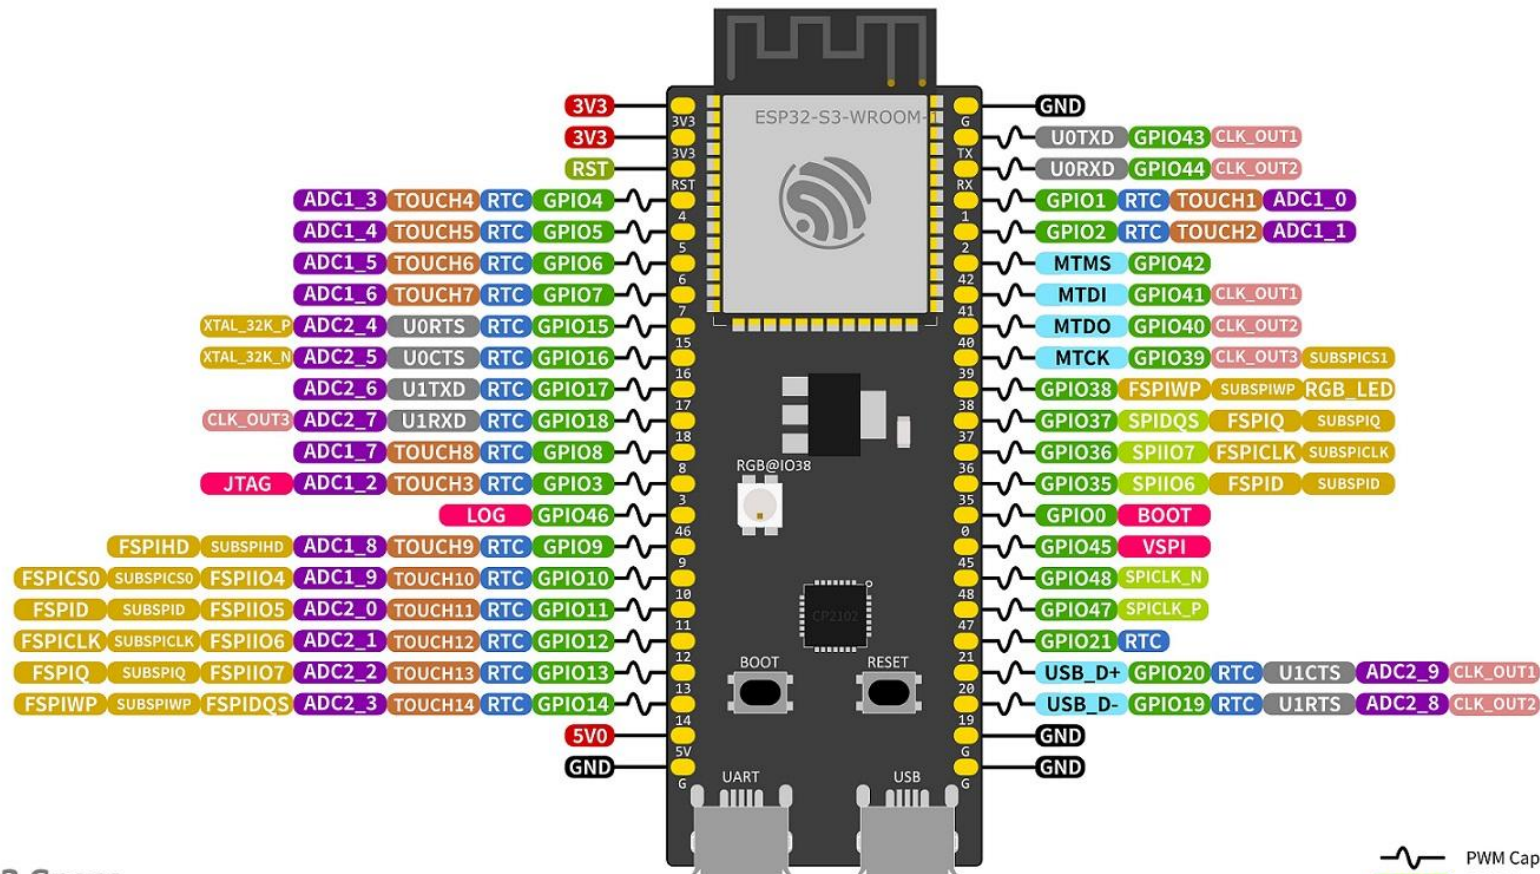

ESP32-S3 Specs

32-bit Xtensa® dual-core @240MHz
 Wi-Fi IEEE 802.11 b/g/n 2.4GHz + BLE 5 Mesh
 512 KB SRAM (16 KB SRAM in RTC)
 384 KB ROM
 45 GPIOs, 4x SPI, 3x UART, 2x I2C,
 14x Touch, 2x I2S, RMT, LED PWM, USB-OTG,
 TWAI®, 2x 12-bit ADC, 1x LCD interface, DVP

- PWM Capable Pin
- GPIO Input and Output
- JTAG for Debugging and USB
- Analog-to-Digital Converter
- Touch Sensor Input Channel
- Other Related Functions
- Serial for Debug/Programming
- Strapping Pin Functions
- RTC Power Domain (VDD3P3_RTC)
- Ground
- Power Rails (3V3 and 5V)
- Miscellaneous/SPI functions
- Clock Output