


Planar solid-wall correction: native coupled trial

Ordinary native continuation from the identical 46 s state; amplitudes measured only in 48–58 s

Curves retain physical accepted times. Candidate writes forces only; production also writes FVM/VPM profiles and surfaces.

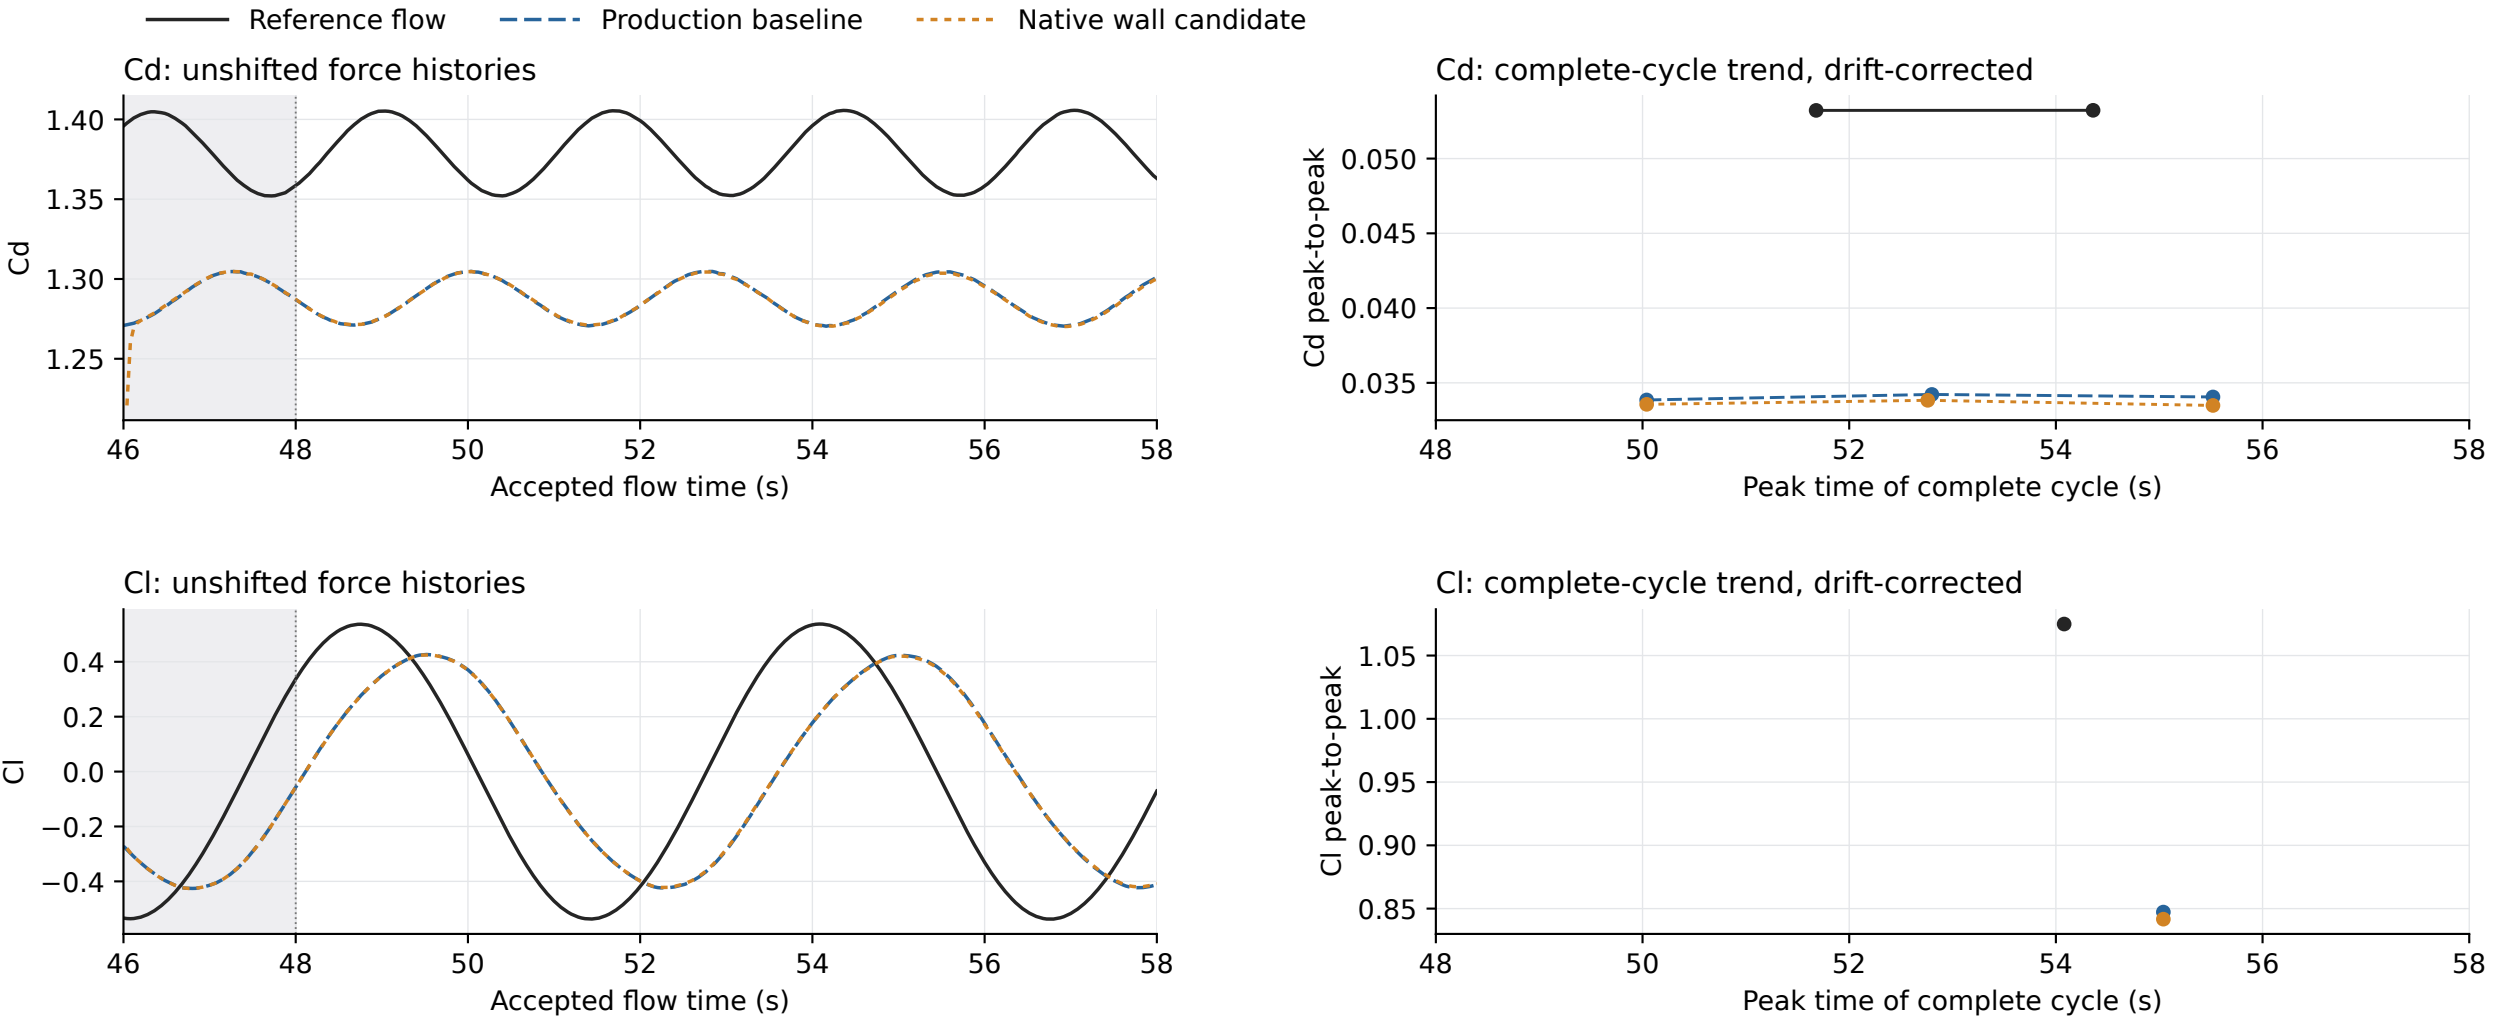

Complete-cycle medians and ratios · identical 48-58 s window

Case	Cd raw	Cd drift-corrected	Cl raw	Cl drift-corrected	Cd / Cl cycles
Reference flow	0.053327	0.053226	1.075184	1.074905	2 / 1
Production baseline	0.034104	0.034055	0.847504	0.847250	3 / 1
Native wall candidate	0.033720	0.033561	0.842961	0.841656	3 / 1
Production baseline / reference	64.0%	64.0%	78.8%	78.8%	—
Native wall candidate / reference	63.2%	63.1%	78.4%	78.3%	—

Gray interval 46–48 s is excluded from all amplitude and timing statistics. Each cycle must be entirely contained in 48–58 s.

Raw = actual min–max of a complete cycle; drift correction subtracts the interpolated trough baseline. No phase shift is used.

Timing groups retain actual interface sweeps and sampling scope. A finite continuation window does not establish saturation.