

Wireless Magnetic Opening Detector

Magnetic contact sensor for doors and windows — Smart mode (open/close) and Violation mode — 433.92 MHz RF transmitter with EETX433A

Application guide for wireless opening sensors in alarm systems, using the EETX433A multifunction transmitter in magnetic sensor mode: Smart mode reports opening and closing; violation modes signal intrusion.

FREQUENCY**433.92 MHz****RF POWER****13 dBm****MODES****Smart · Violation****SENSOR****TMR / Reed****VERSION****v1.1****BASED ON IC****EETX433A****DEVELOPED BY****Engeletron Engenharia****DATE****2026-07-04**

• Introduction

This application note describes how to build a **wireless opening detector** for doors and windows — a magnetic alarm contact — using the **EETX433A** multifunction transmitter in magnetic sensor mode. The EETX433A integrates a 433.92 MHz PLL oscillator, OOK/ASK modulator, power amplifier and the encoding and power-management logic in a single SOP-8 package, enabling a compact, ultra-low-power battery-powered product.

The detector consists of a **magnet** fixed to the moving part (door or window leaf) and a board carrying the **EETX433A and a magnetic sensor** fixed to the frame. With the door closed, the magnet keeps the sensor in one state; on opening, the magnet moves away, the sensor switches and the IC transmits an RF event. The behavior is selected by the CFG pins at power-up, including a **Smart mode** that reports both opening and closing.

The IC electrical details (pinout, absolute ratings, operating conditions, RF frame format and code mapping) are given in the EETX433A datasheet and referenced throughout this document. The per-mode pin configuration is in the "Configuration Modes (CFG Pins)" table of the datasheet (page 5).

• Operating Principle

Opening detection uses a **magnet + magnetic sensor** pair. The magnet is mounted on the moving leaf and the EETX433A board (with the sensor) on the fixed frame, aligned and coplanar. With the door closed the magnet sits near the sensor; on opening, the magnet **moves away**, the sensor output switches and generates a rising edge (0→1) on the **SENIN** pin, which triggers the RF transmission.

The magnetic sensor can be a **TMR** (magnetoresistive) device with digital ON/OFF output or a **reed switch**. TMR offers good gap tolerance and repeatability; reed is passive and simplest. Both deliver a digital signal to the SENIN pin, which the EETX433A monitors in sensor modes — but the way they are wired differs (see Wiring Schemes).


Unlike the PIR sensor, the magnetic sensor has **no stabilization time and no test mode**: it is always ready immediately after initialization. Any opening is detected instantly.

• Wiring Schemes

The EETX433A accepts both types of magnetic sensor. The difference is the electrical interface to the SENIN pin — one is active, the other needs a pull resistor.


TMR sensor (active, 3 terminals)

The TMR sensor (U2) is powered from VDD/GND and delivers an already-conditioned logic level on the **VOUT** pin, wired **directly to SENIN** of the EETX433A. A decoupling capacitor (C5, 100 nF) next to the sensor stabilizes the supply. No pull resistor is needed since the output is active (push-pull). TMR offers good gap tolerance and repeatability, at the cost of a small quiescent current (a few μA).

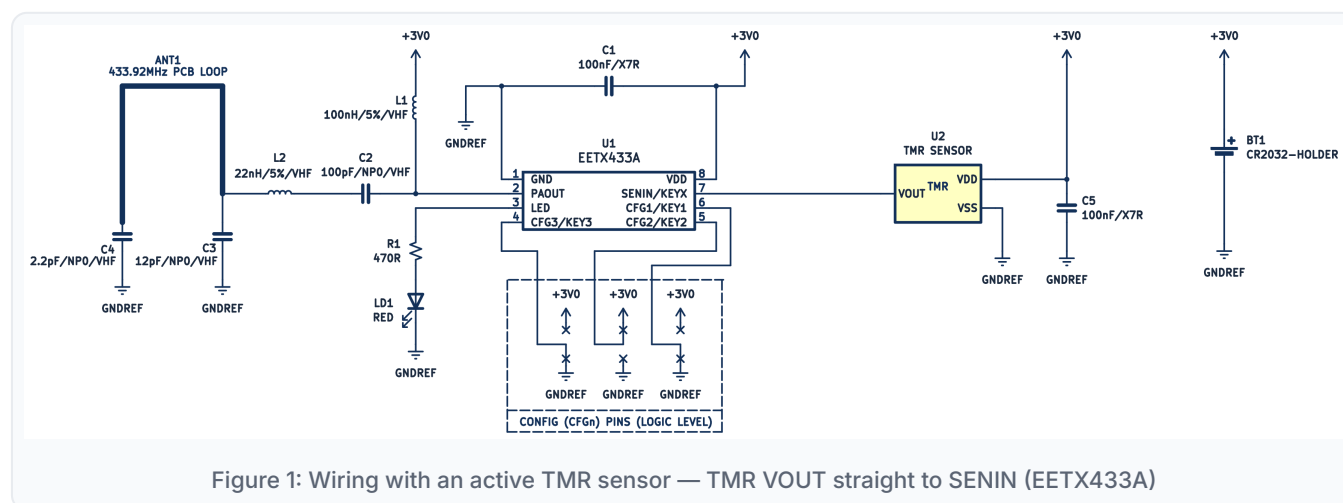

Reed switch (passive, 2 terminals)

The reed switch (SW1) is a dry, 2-terminal contact with no power. It is wired between SENIN and GND, and a **pull-up resistor (R2, 2.2 M Ω)** pulls SENIN to VDD. With the magnet near (door closed) the reed conducts and holds SENIN low; on moving the magnet away (opening), the reed opens and the resistor drives SENIN high, generating the **0→1** edge that triggers transmission. It is the simplest, near-zero-power solution, but requires the pull resistor and has a mechanical contact.

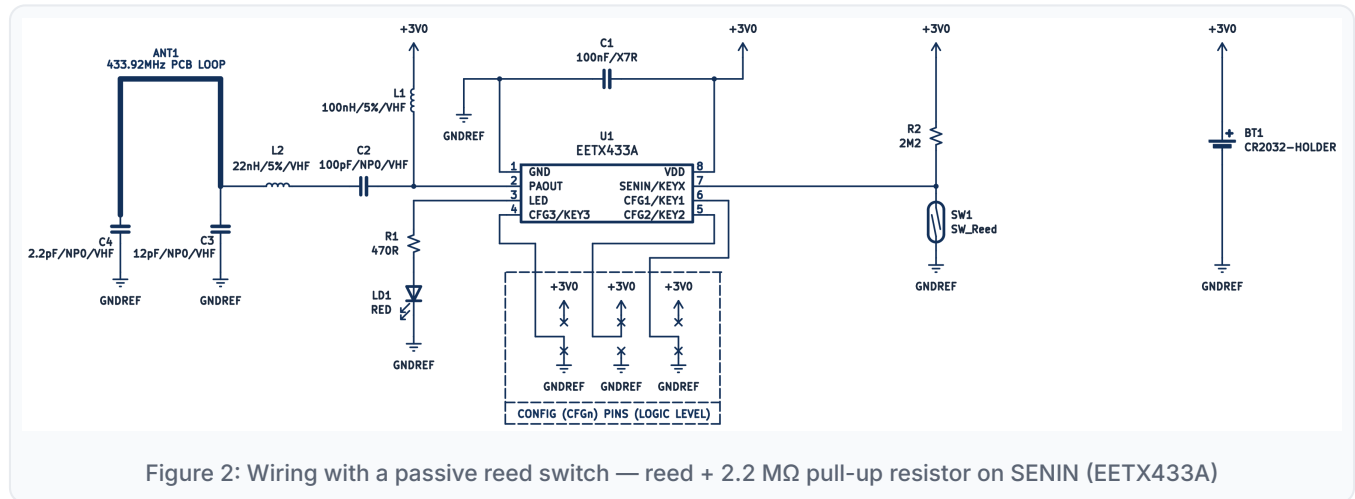

• Operating Modes

The mode is selected by tying pins CFG1, CFG2 and CFG3 to GND (level 0) or VDD (level 1) — sampled **ONLY** at power-up. Of the EETX433A's 8 modes, four are magnetic. The table below reproduces the pin configuration (datasheet, page 5):

MODE	FUNCTION	CFG3	CFG2	CFG1	SENIN
1	Violation	0	0	1	Input
2	Violation	0	1	0	Input
3	Smart (Open/Close)	0	1	1	Input
6	Violation	1	1	0	Input

The CFG pins are sampled only at power-up; changes during operation are ignored. To enter the desired mode, tie each pin to VDD (1) or GND (0) per the table before powering the device.

Smart Mode (Mode 3) — recommended for supervision

In Smart mode the transmitter sends distinct codes for **opening** and **closing**, letting the alarm panel know the real state of the door/window. On **opening** (magnet moves away, SENIN 0→1) the **Open (A) = code 4** event is sent; on **closing** (magnet approaches, SENIN 1→0) the **Close (F) = code 5** event is sent. Low battery is signaled with **code 3**. Ideal for supervised panels that display "open/closed" per zone.

Violation Modes (Modes 1, 2 and 6)

In these modes the transmitter sends only the **Violation (V)** event — the opening, i.e. the magnet moving away — and **Low battery (B)**; closing is not reported. The violation code differs between modes (Mode 1 → 1; Mode 2 → 3; Mode 6 → 2), as does the battery code, so a single receiver can distinguish sensors/zones by code in addition to the unique 20-bit address. Suited to simple intrusion alarms where only the opening matters.

• Transmitted Events and Codes

The 4-bit data field (D3D2D1D0) carries the event. The value depends on the configured mode — the same number means different events in different modes:

MODE	FUNCTION	Open (magnet away)	Close (magnet near)	Low battery
1	Violation	V = 0001 (1)	—	B = 0011 (3)
2	Violation	V = 0011 (3)	—	B = 0001 (1)
3	Smart	A = 0100 (4)	F = 0101 (5)	B = 0011 (3)
6	Violation	V = 0010 (2)	—	B = 0001 (1)

Legend: V = Violation (opening) · A = Open · F = Close · B = Low battery. The number in parentheses is the decimal value of the 4 transmitted bits. Since the frame does not carry the mode number, the meaning of the 4 bits depends on the unit's configured mode; the unique 20-bit address identifies the unit at the receiver.

• Operating Sequence

After the battery is inserted, a brief initialization occurs and the sensor is immediately ready — there is no stabilization time or test mode. From then on, each opening (and, in Smart mode, each closing) generates a transmission. The LED visually indicates each stage.

Phase / Event	Condition	Transmits	LED
Initialization	Battery insertion	— (no transmission)	On ~2 s
Ready	Immediately after initialization	— (waiting for event)	Off
Opening	Magnet away · SENIN 0→1	Violation/open code · 24 packets (1,296 ms)	Blinks on transmit
Closing	Magnet near · SENIN 1→0 (Mode 3 Smart only)	Close code (F = 5)	Blinks on transmit
Low battery	VDD < ≈ 2.2 V confirmed	Battery code after the event	3 fast blinks

READY FOR IMMEDIATE USE

The magnetic sensor requires no stabilization time and no test mode (unlike the PIR sensor). After the ~2 s initialization, it is ready to detect any opening instantly. Transmission is fixed at 1,296 ms (24 packets), regardless of whether the sensor state changes again after the trigger.

• Low-Battery Detection

The EETX433A continuously monitors the supply voltage in sensor mode. The nominal low-battery threshold is **2.20 V**, with $\pm 5\%$ (± 0.10 V) tolerance — in practice the signaling may occur between 2.30 V and 2.10 V depending on component variation.

To avoid false warnings from momentary voltage dips, the condition must be confirmed on **two consecutive trigger events** with low voltage; only from the second event does the sensor signal low battery.

Once low battery is confirmed, on each detected event the LED blinks **3 times quickly**, waits **1 s** and transmits the **event code** (violation/opening or, in Smart mode, open/close); it then waits another **1 s** and transmits the **low-battery code** (3 in modes 1 and 3; 1 in modes 2 and 6). The receiver can then alert the user to replace the battery.

• Transmitted RF Signal

Transmission follows the EETX433A packet format: pulse-width OOK encoding at 433.92 MHz, with a basic time unit $\lambda = 500 \mu\text{s}$ (each bit takes $3\lambda = 1.5$ ms). Each packet contains pilot, start, 20 bits of programmable address (factory-unique), 4 bits of data and 4 bits of fixed anti-code, totaling $108\lambda \approx 54$ ms. Each event sends 24 packets (1,296 ms).

In magnetic sensor mode, the 4-bit data field carries the event code according to the configured mode (see the Events and Codes table): violation or open/close, and low battery. Since the frame does not carry the mode number, the meaning of the 4 bits depends on the unit's mode; the 20-bit address uniquely identifies the sensor at the receiver. See the EETX433A datasheet for the full frame structure and code mapping.

• Technical Characteristics

Values for the complete magnetic-contact system (EETX433A IC + magnetic sensor + battery). The RF, voltage and data-format characteristics are the same as the EETX433A.

Parameter	Value
Operating frequency	433.92 MHz
Channels	1
Modulation	OOK / ASK
RF power (typ.)	13 dBm
Supply voltage	3.0 V nom. (2.0–3.6 V)
Battery options	1× CR2032 / 1× CR123 / 2× AA(AAA)
Transmit current	12 mA
Rest current (IC standby)	800 nA
Sensor type	Digital ON/OFF TMR or reed switch
Available magnetic modes	1, 2, 3 (Smart), 6
Transmission duration per event	1,296 ms (24 packets)
Low-battery threshold	2.20 V $\pm 5\%$
IC package	SOP-8

IC RF and standby per the EETX433A datasheet (13 dBm; 800 nA standby). Total rest current depends on the chosen sensor: a reed switch is passive ($\approx$ IC standby); an active TMR sensor adds typically a few μ A.

• Application Guidelines

- **Magnet-sensor alignment:** mount the magnet on the moving leaf and the board (with the sensor) on the fixed frame, aligned and coplanar, with the smallest possible gap in the closed position. Respect the sensor's sensitive axis / polarity marking.
- **Operating gap:** check the switching distances (pull-in / drop-out) of the chosen sensor and keep margin — opening must move the magnet beyond drop-out, and closing must bring it back within pull-in.
- **Metal surfaces:** avoid mounting the assembly on ferromagnetic materials (steel) that divert the field; if unavoidable, use non-magnetic spacers and re-validate the gap.
- **Sensor choice:** **TMR** tolerates larger gaps and is more repeatable (costs a few μA); **reed** is passive ($\sim$ zero power) but needs the pull-up resistor and has a mechanical contact.
- **Mode selection:** use **Mode 3 (Smart)** when the panel needs to know open/closed (supervision); use violation modes (1, 2, 6) for simple intrusion alarms. Set the CFG pins per the modes table at power-up only.
- **Antenna:** use the printed 433.92 MHz loop antenna per the reference schematic and the EETX433A datasheet; avoid routing ground plane or nearby metal around the antenna.

• Soldering and Reflow

Excess temperature can damage the EETX433A, causing thermal deformation of the package and a shift of the 433.92 MHz frequency. The reflow limit is **≤ 210 °C for ≤ 10 s** — the component's own maximum rating, more restrictive than the standard J-STD-020 reflow classifications (220–235 °C for Sn-Pb).


Alloy: **Sn63Pb37** (eutectic, 183 °C liquidus — the market standard), whose reflow peaks typically at **205–220 °C**; for the EETX433A the peak stays at the low end: board peak **205–210 °C** (target ~205 °C, never above 210 °C), compensated by a **TAL of 60–75 s**. Because the peak is modest, the time above liquidus is extended — and it is this combination that forms the intermetallic without exceeding the component limit.

To avoid **cold joints**: keep the soak of ~60 s between 150–160 °C (activates the flux and evens the board) and the **TAL of ~64 s above 183 °C** (ensures full melt and good wetting). Ramp-up ≤ 2.5 °C/s and cooling ≤ 4 °C/s. A high, short peak is not needed: a low peak plus an adequate TAL produces the same joint, safely for the IC.

NARROW WINDOW — MEASUREMENT IS MANDATORY

The Sn63Pb37 window here is only ~5 °C wide: **below 205 °C** there is a risk of cold joints; **above 210 °C** the IC is damaged (SOP-8 deformation and frequency drift). The profile **must be measured with a thermocouple on the board**, at least once per line. NEVER exceed 210 °C.

• Soldering and Reflow

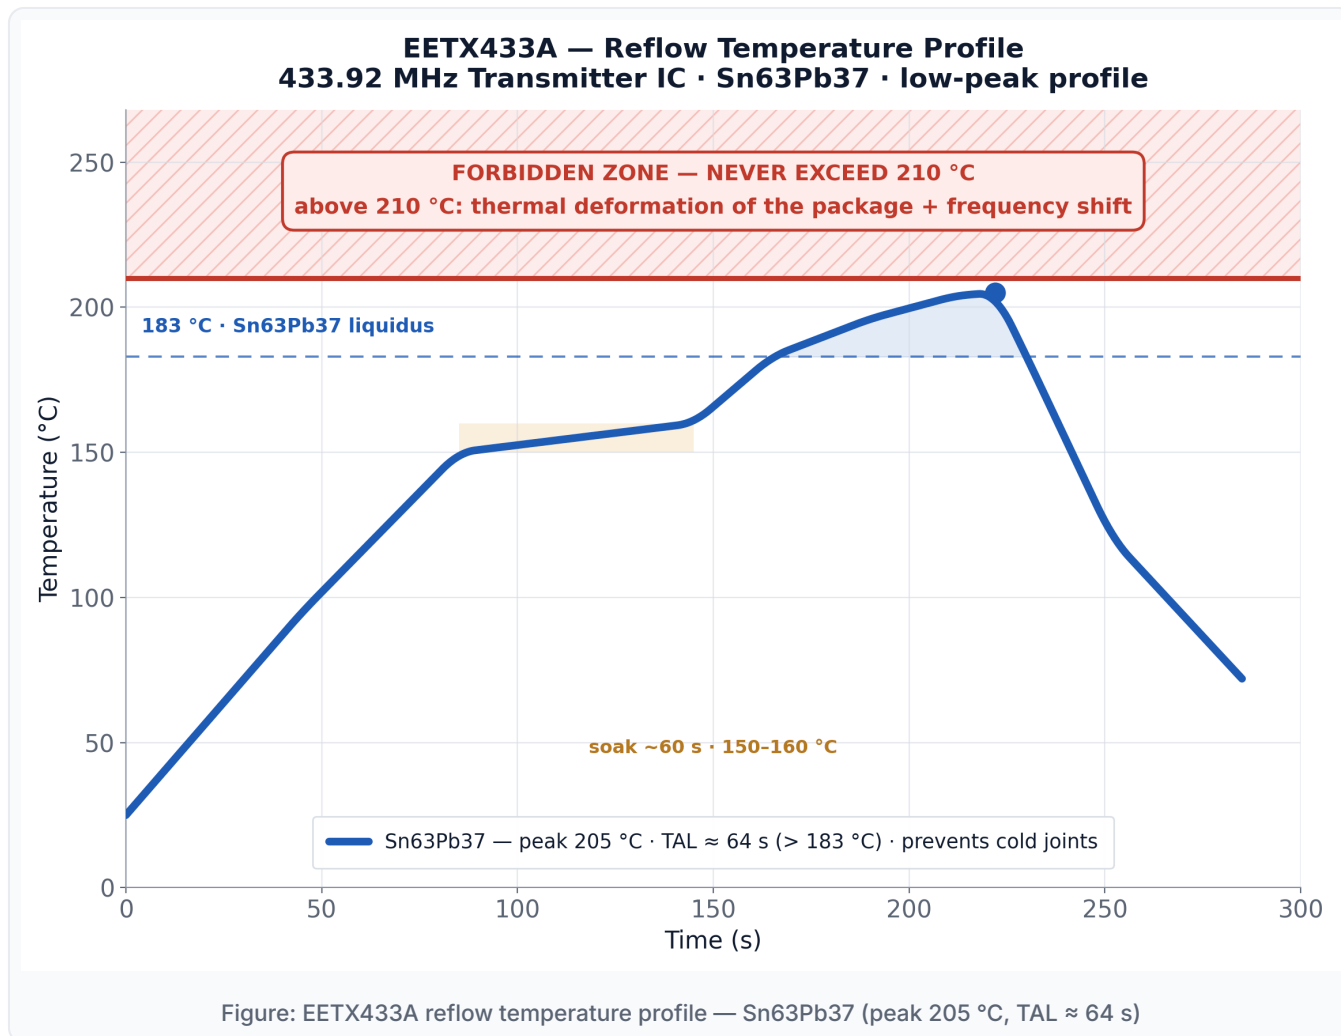

Phase	Time (s)	Temperature (°C)
Ramp-up	0–85	25 → 150
Preheat (soak)	85–145	150 → 160
Ramp to peak	145–212	160 → 204
Peak (reflow)	212–228	205 (max. 210)
TAL — time above liquidus	≈ 64	> 183
Cooling	228–285	205 → 72


Sn63Pb37 (eutectic, 183 °C liquidus) — market standard. Low-peak profile: peak 205–210 °C (never above 210 °C), compensated by a TAL of 60–75 s. A ~60 s soak at 150–160 °C and a ~64 s TAL prevent cold joints; ramp-up ~1–2.5 °C/s · cooling ≤ 4 °C/s · max. 2 reflow cycles. Hand soldering (samples): tip ≤ 300 °C, contact ≤ 5 s.

• Practical oven setup — zone profile

The chart below shows the reference setup for a tunnel oven: the **air setpoint per zone** (solid line — 150 · 170 · 175 · 180 · 200 · 208 °C) and the resulting **board temperature** (dashed). Air setpoints are a starting point — tune by profiling with a thermocouple on the board. What matters is the board result: **peak ~205 °C and TAL ~64 s**, never above 210 °C.

NARROW WINDOW — MEASUREMENT IS MANDATORY

The Sn63Pb37 window here is only ~5 °C wide: **below 205 °C** there is a risk of cold joints; **above 210 °C** the IC is damaged (SOP-8 deformation and frequency drift). The profile **must be measured with a thermocouple on the board**, at least once per line. NEVER exceed 210 °C.

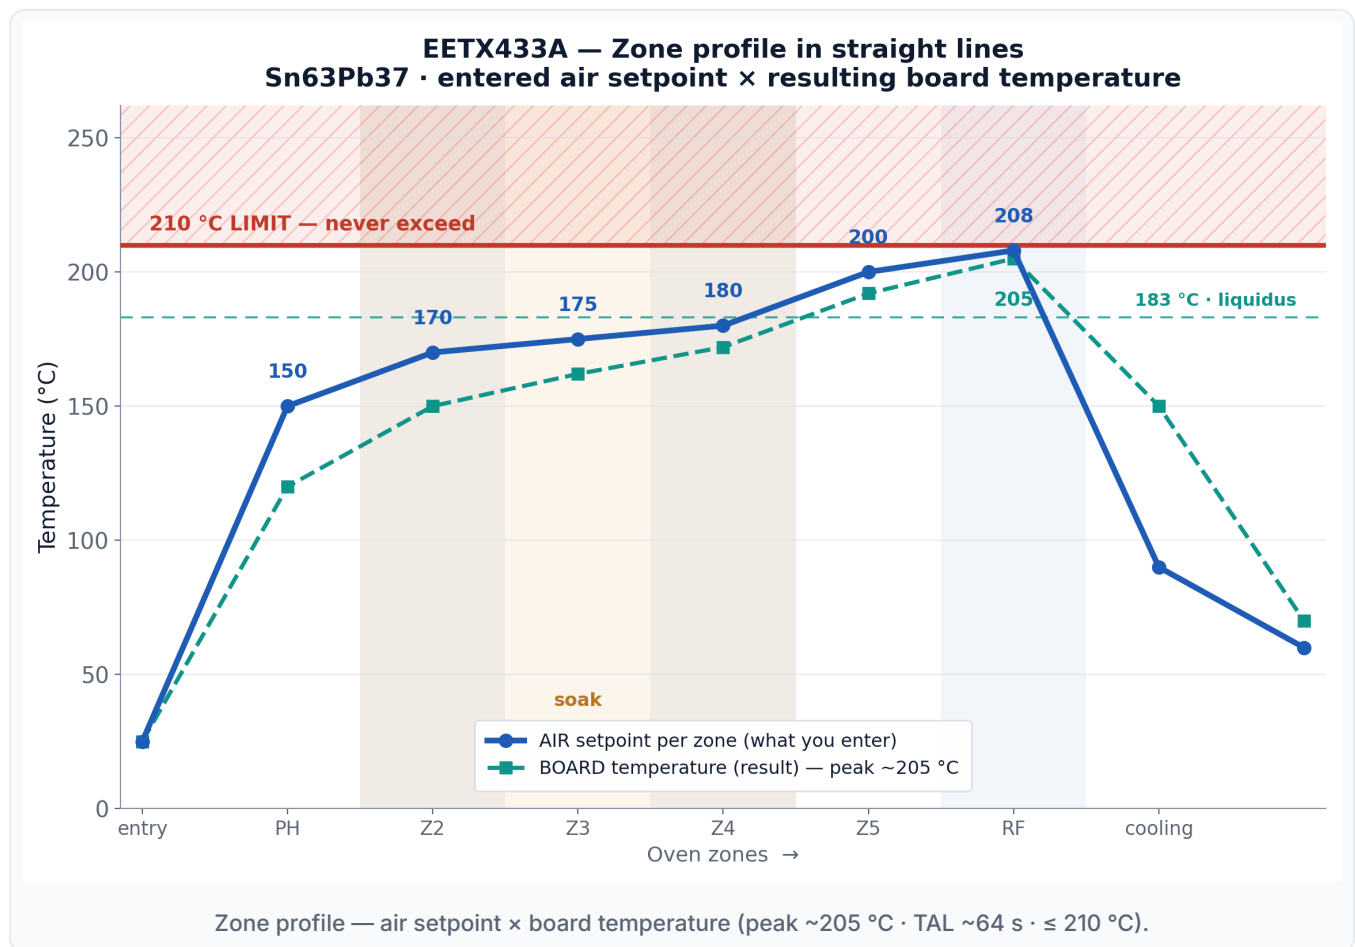

To learn more about the EETX433A and obtain the full datasheet, visit: engeletron.com.br

Legal Notice

The information in this application note is provided in good faith and believed to be accurate at the time of publication. Engeltron Engenharia reserves the right to modify specifications without notice. The circuits and values shown are reference examples; it is the integrator's responsibility to validate performance in the final application. We accept no liability for consequences arising from the use of this information.