MODEL TL-5101

International size reference: 1/2AA, ER14252

TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)

Nominal capacity @ 0.5 mA, to 2VRated voltage3.6 V


■ Weight 9.2g (0.324 oz)


■ Volume 4.3 cc

Operating temperature range -55°C to +85°C

U.L. Component Recognition, MH 12193





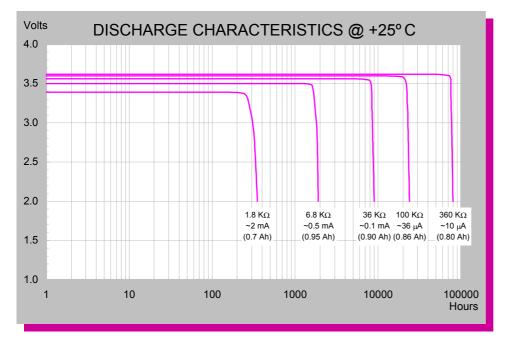

AVAILABLE TERMINATIONS

 SUFFIX- /S STANDARD
 15-5101-21000


 SUFFIX- /T SOLDER TABS
 15-5101-31000


 SUFFIX- /P AXIAL PINS
 15-5101-41000

 SUFFIX- /PT2 RADIAL PINS
 15-5101-36000

 SUFFIX- /TP POLARIZED TABS
 15-5101-52000

 SUFFIX- /PT POLARIZED TABS
 15-5101-53000

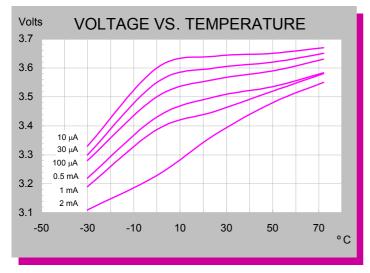

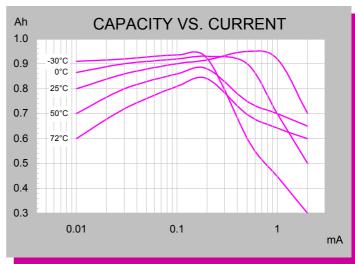

MEMORY BACKUP

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

Rev. B 03/03