

SEDS/SSPI 2018 Design Competition
Space Tug



Students for the Exploration and Development of Space
University of California San Diego

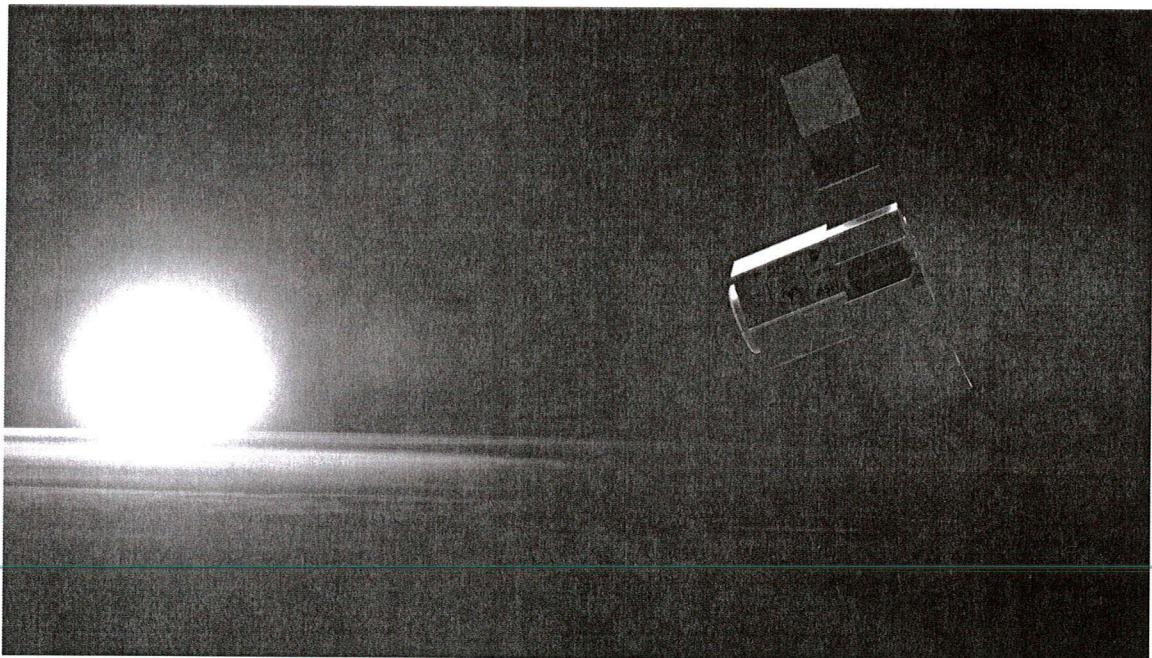


Table of Contents

Concept Art	2
Systems	3
Business	7
Structures	12
Electronics	20
Power	25
Propulsion	27
Orbital Mechanics Approximation	33
Propellant Feed	35
Future	41
Sources	42

I recommend adding at least a mass, power, and thermal budget here.

Concept Art



Add page #'s



Is GEO market? Lots of satellites go to GEO. Implies larger market.

Systems

Mission Statement:

To provide safe, reliable, consistent, and cost effective transportation of cargo from Low Earth Orbit to any cis-lunar or low-lunar orbits. Cargo missions may range from satellite deployment or delivering of cargo to base in lunar orbit.

timely? are you trying to say the service will be available on-demand?

Overall System Requirements

Argo is a space-tug designed for multiple trips between lunar orbit and LEO while carrying an upwards of 34 metric tons of cargo. It is also designed to be capable of delivering satellites to GEO or lunar orbits. The structure, electronics, and data acquisition systems must support the load and provide control over a multiple mission lifespan. The estimated mission time is anywhere from 45 days to 95 days, dependent on the mass of the cargo Argo is transporting. The ideal lifespan from launch is 7 years of continuous operation. Argo will be retrofitted in the event that future technology facilitates either full recovery of the vehicle or continuous maintenance. When the operational lifespan of Argo has been exceeded, and reliability can no longer be guaranteed to our potential contracts, the craft will be transitioned to a heliocentric graveyard orbit; therefore ensuring the craft does not orbitally decay into Earth's upper atmosphere, which would cause a disassembly of the craft and its reactors, and a subsequent spread of radioactive material across the Earth.

LEO and Lunar

2 cases:
Design life: how long is the vehicle designed to last

Business case: it is designed to serve 30 clients in 7 years

It's okay to pick a design case and run with it!

Design Objectives

strictly speaking, requirements are precise "shall" statements that drive verification

Individual Subsystem Requirements

Electronics:

- Provide positioning control based off of telemetry data
- Control maneuvers between target orbits
- Be properly insulated and protected
- Give navigational feedback for correct routing during orbit transfers

Propellant Feed:

- Deliver xenon from the main storage tank to the thruster head.
- Maintain a low leakage rate and robustness
- Piping should be strong enough to hold high pressure xenon
- Provide a range of mass flow rates, making the thrusters throttleable
- Receive and Transmit accurate pressure readings at multiple locations within the system

Propulsion:

- Provide reliable thrust, enabling Argo to reach its destination
- Have a tenacious operational lifetime, as it is the most expensive system on the craft
- Thrusters need to provide range of thrust - Why?
- Attitude control system (ACS) must provide alignment during rendezvous maneuvers

Sometimes expensive is okay, if you get a good ROI. You might want to say it maximizes profits

Structures:

- ↳ Probably merits its own subsystem -
- Structure must be load bearing while on the ground, and provide structure during orbit and launch.
 - Withstand the launch load and vibrations without deformation
 - Radiators must dispel heat, making the performance of the spacecraft nominal.
 ○ Other forms of heat reduction may need to be added.
 - Modularity must be incorporated to the extent of facilitating specific part replacement as needed. This is currently designed as replaceable engine and reactor buses (cores) that developing satellites can remove with future infrastructure improvements
- As enabled by the business case,
- Star
Orbit raising? trackers
orbital maneuvers, etc. are usually not
subject to change
in detailed design
Prop equipment
- Servicing

Power:

- The three reactors should be able to support all electronics and telemetry systems, as well as the propellant feed system and thrusters
- Withstand the potential differences within the system.
- Provide sufficient current for all systems
- Insulated from the reactors to prevent damage to subsystems.

are these different?

} "Power regulation" is usually used to imply some of these

Shielding:

- what is insulate?
- Provide protection against micro-meteorites, and radiation emitted from the sun
 - The craft needs to be properly insulated from the extreme temperature range in space
 - Insulation of parts throughout craft, preventing thermal damage resulting from, and occurring between, the parts themselves
 - Maintain the operational constraints of temperature and pressure of all parts

Concept of Operations

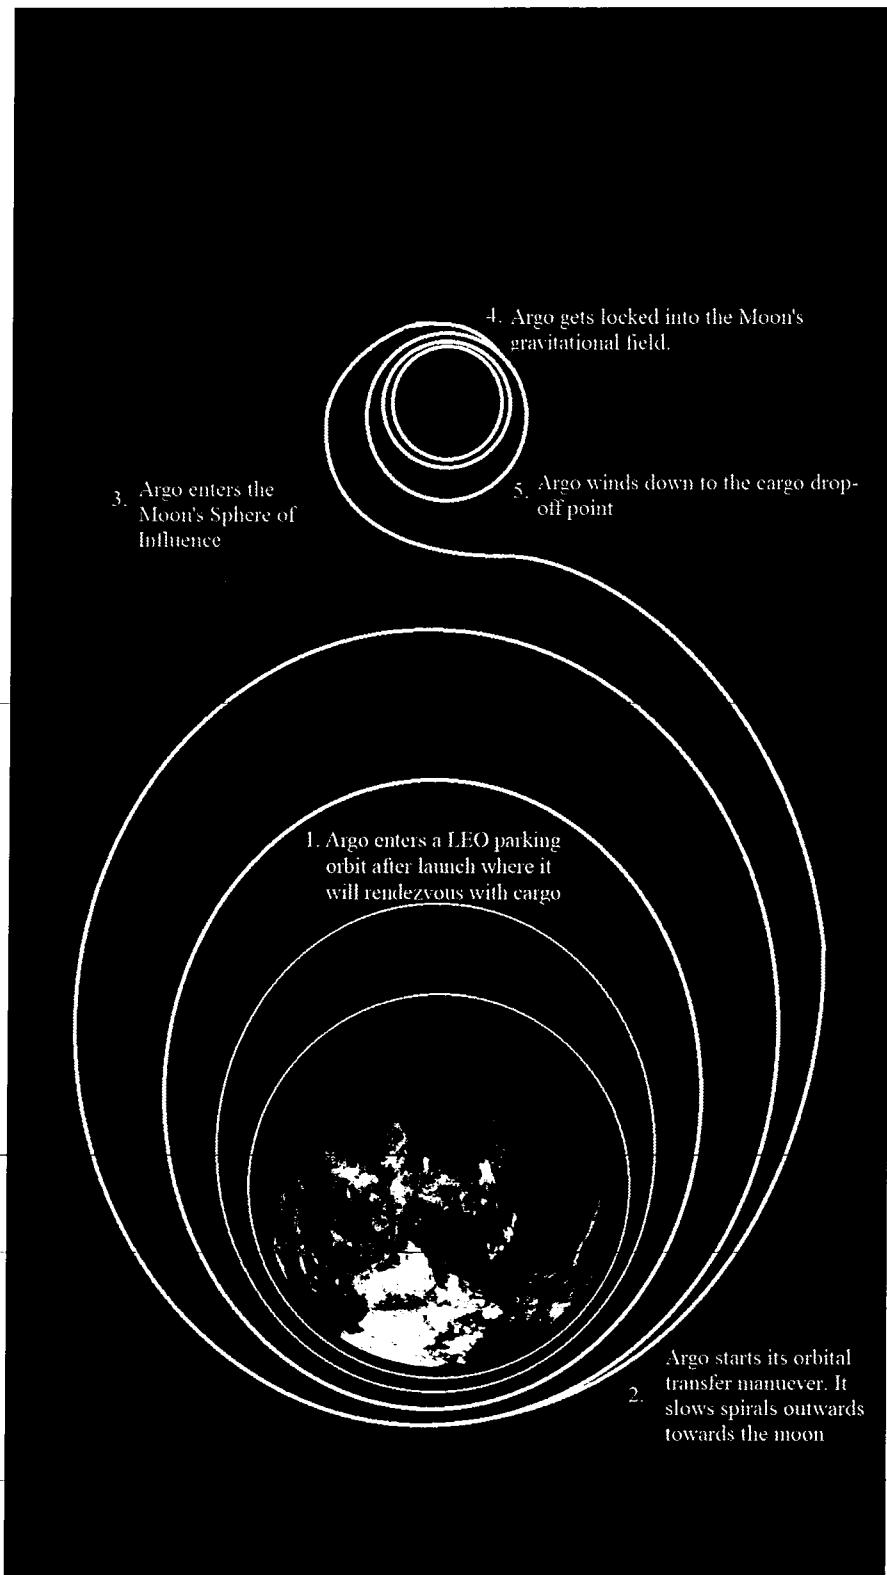


Figure 1: Concept of Operations

Risks can be addressed as

Safety Plan and Risk Management

Overview

Argo is a large spacecraft with radioactive and other hazardous materials on board.

Many precautions are required before, during, and after launch to prevent adverse environmental damage. The nuclear reactors are the greatest concern, requiring the implementation of proper techniques for safe operation and disposal.

Vehicle Retirement

↳ Seems a bit backwards chronologically -
might start with ground ops / launch safety

If the vehicle is no longer capable of powering itself within LEO, then the reactors present major health and environmental problems. The equipment and system on Argo are limited to the operational lifespan of the thruster heads. The thruster heads have the shortest lifespan of all the components on Argo and ceasing thruster operation results in the loss of the ability to accelerate, regardless of the performance of the other subsystems. This can potentially be extremely dangerous given that, if we have an engine failure, we cannot control Argo and it may result in the craft entering the atmosphere. After the completion of approximately 10 missions (more or less depending on mission length and the mass carried), or if it is determined the thruster heads are too worn to risk another mission, the craft will be sent into a heliocentric graveyard orbit. This type of orbit will provide the minimum possibility of it crashing into Earth and will prevent adding clutter to usable cis-lunar orbits. The Argo reactor and engine cores are modular so that a refitting craft in the future could remove the spent systems and place new cores to upgrade and increase the life-span of Argo.

Redundancy/Strength

Systems within Argo are made redundant where possible so that if a single part within a system fails, then the whole system is not jeopardized. Dual propellant feed systems, excluding the main tank, exist to sustain the extended life cycle. The main tank's lack of physical redundancy will be compensated for through a high safety-factor in its manufacturing. The structure of the spacecraft is being constructed out of high strength titanium and aluminum alloys so that the structure is able to bear the 720kN of launch force that it will experience if the vehicle is sent up loaded with one round-trip worth of fuel.

Guidance/Correction

The thrusters can be throttled or shut off to make trajectory corrections. The ACS system also allows rotation and translational movement for rendezvous maneuvers and the

Hazard
Thruster failure
results in Earth
deorbit

Control
Redundant thruster

also personnel

safety

Argo is a large spacecraft with radioactive and other hazardous materials on board.

Many precautions are required before, during, and after launch to prevent adverse environmental damage. The nuclear reactors are the greatest concern, requiring the implementation of proper techniques for safe operation and disposal.

Vehicle Retirement

↳ Seems a bit backwards chronologically -
might start with ground ops / launch safety

If the vehicle is no longer capable of powering itself within LEO, then the reactors present major health and environmental problems. The equipment and system on Argo are limited to the operational lifespan of the thruster heads. The thruster heads have the shortest lifespan of all the components on Argo and ceasing thruster operation results in the loss of the ability to accelerate, regardless of the performance of the other subsystems. This can potentially be extremely dangerous given that, if we have an engine failure, we cannot control Argo and it may result in the craft entering the atmosphere. After the completion of approximately 10 missions (more or less depending on mission length and the mass carried), or if it is determined the thruster heads are too worn to risk another mission, the craft will be sent into a heliocentric graveyard orbit. This type of orbit will provide the minimum possibility of it crashing into Earth and will prevent adding clutter to usable cis-lunar orbits. The Argo reactor and engine cores are modular so that a refitting craft in the future could remove the spent systems and place new cores to upgrade and increase the life-span of Argo.

Redundancy/Strength

Systems within Argo are made redundant where possible so that if a single part within a system fails, then the whole system is not jeopardized. Dual propellant feed systems, excluding the main tank, exist to sustain the extended life cycle. The main tank's lack of physical redundancy will be compensated for through a high safety-factor in its manufacturing. The structure of the spacecraft is being constructed out of high strength titanium and aluminum alloys so that the structure is able to bear the 720kN of launch force that it will experience if the vehicle is sent up loaded with one round-trip worth of fuel.

Guidance/Correction

The thrusters can be throttled or shut off to make trajectory corrections. The ACS system also allows rotation and translational movement for rendezvous maneuvers and the

typically we don't allow
single point failures for
"active" units -
only allowed
in structure,
fuel lines, etc

robotic arm allows for final alignment when we are within range (about 2 meters and 90 degrees of orientation).

design reference missions

Standard Operating Procedure

Three standard missions have been evaluated in the development of Argo; cargo transport from LEO to GEO (or other cis-lunar orbits), large mass cargo transport from LEO to LLO (up to 34 megaTonnes), and regular resupply missions from LEO to LLO for a theoretical deep-space gateway. While these missions were the primary focus during the development of Argo, other possibilities exist. Some of these possibilities include; repositioning satellites, moving stations (like the ISS) into higher orbits, and even transport of heavy cargo to Mars (though travel times would be measured in years). The following SOP details three standard missions starting from Argo being stationed in LEO.

- is this
a new
acronym?
if so,
write
out the
first
time.
- is this
within
the
Argo
capabili
ty
- how are you defining rendezvous? usually it's
LEO to GEO, LEO to LLO (heavy), LEO to LLO (resupply) the close approach of two
vehicles, launch vehicles don't
have LIDAR, etc.
to enable
this
- Argo is stationed in a LEO parking orbit, cargo is launched into LEO using traditional rockets, rendezvous to be mostly handled by second stage of launch vehicle.
 - Cargo detaches from the second stage of its launch vehicle, and the second stage moves away, Argo approaches and orients itself with ACS and, when close enough, uses its robotic arm for final alignment and latches onto the cargo at its fairing - separation ring or Morman ring
 - Argo orients itself and can initiate either a low thrust orbit transfer from LEO to GEO, or Earth to moon, depending on its mission
 - LEO to GEO transfer time: under 7 days
 - LEO to LLO (heavy) transfer time: 150 days
 - LEO to LLO (resupply) transfer time: 40 days
 - Argo positions the cargo in orbit and releases from fairing adapter. (final alignment, if necessary, is done by cargo)
 - Argo begins low thrust transfer orbit to return to LEO where it will rendezvous with its permanent refueling station.
 - LLO to LEO (empty craft): 40 days
 - GEO to LEO (empty craft): 7 days
 - After filling with xenon propellant, which is launched up 60 MT at a time and stored in LEO periodically, Argo moves to parking orbit to await its next mission.

how? through robotic arm?
docking to refueling port?

Business

Hey! Where's SSL?! !!

Market Research

Many companies, like Lockheed, ILS, and Orbital ATK, are moving to capitalize on the open market of refueling, repairing, and repositioning existing satellites, but most have not been focusing on the necessity of cargo transportation. The In-orbit Servicing Market (IoSM) is projected to exceed over \$3 Billion over the next 10 years ("In-Orbit Servicing Market..."). However, a much larger market may soon exist. NASA has been developing a plan for the deep-space gateway: a cis-lunar or lunar orbit station designed to be humanity's next stepping stone to returning to the moon and travelling to Mars. The president of the USA has also posted a Memo requesting NASA to consider returning to the moon and possibly developing permanent infrastructure there. In order to make these stations viable for housing humans requires building materials for initial stations and, once active, reliable cargo shipment of resources (like food and water). This analogous to the near-monthly resupply of the ISS; however, on a far larger scale given the distances involved and amount of cargo required. It is a painfully inefficient use of time, money, and resources to regularly send chemical rockets to GEO or lunar orbit. What the market needs is a safe, reliable, and relatively inexpensive way of regularly sending supplies to these stations, and that is where Argo comes into the picture.

Can you estimate how much of NASA's budget would go to "towing" services? Better yet, estimate a "reasonable" cost for a lunar station and see what % of that effort would go to Argo services.

Cost Analysis: Resupplying the ISS

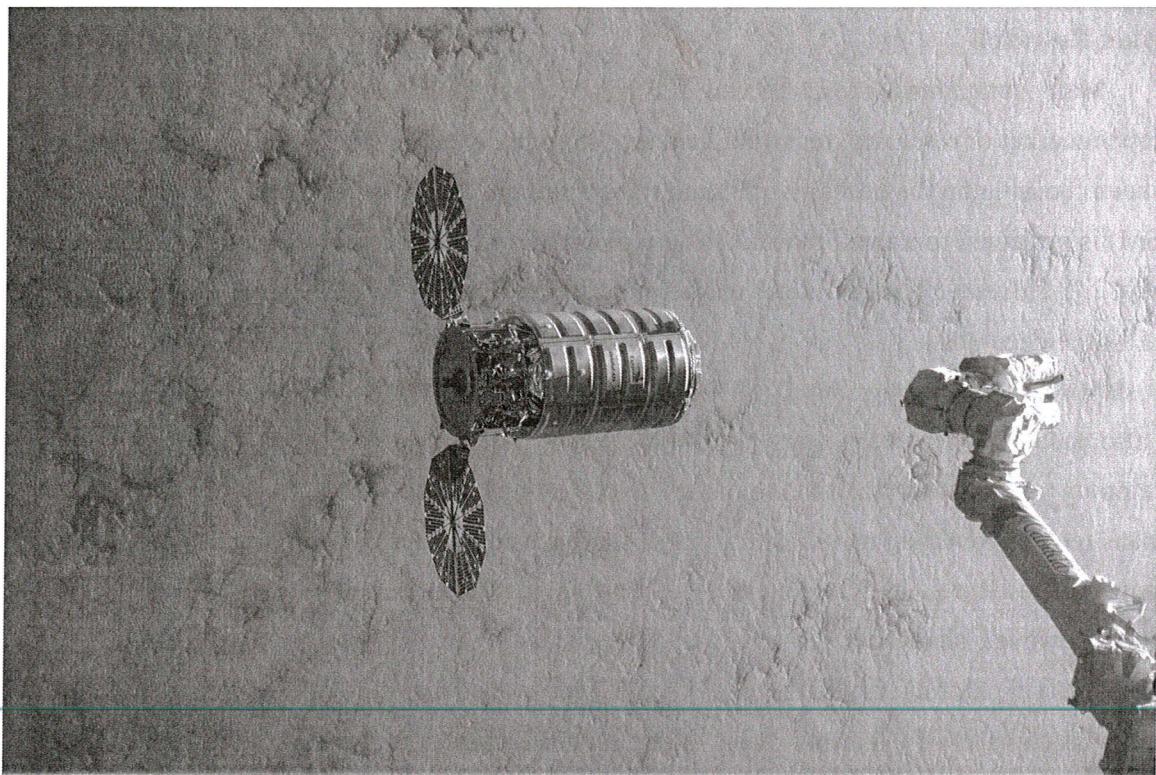


Figure 2: Example of a Resupply mission to the ISS, representative of commercial opportunities in space

You could also use a \$ per MT metric.

ISS Resupply	SpaceX: Falcon 9	Orbital ATK
Cost of Contract Per launch (Millions USD)	140	200-250
Actual cost to company (Millions USD)	61.2-80	150-200
Mass of Payload (MT)	2	2

Table 1: ISS Resupply Costs

The ISS is resupplied on a near monthly basis with all member nations sharing the cost of supplies and launch. While Argo will not be used for resupplying the ISS in LEO, this is an example of the type of missions that will need to be done for stations at GEO or in LLO. With missions costing more, we estimate that missions to supply the deep-space gateway or a lunar base would be run on a quarterly basis and thus would require up to 6 MT minimum of basic cargo (food, water, components) plus up to 30 MT for construction materials.

Cost Analysis: GEO and LLO

\$ / mT would be useful here, too

To GEO	SpaceX: Falcon 9
Propellant (MT)	273
Payload (MT)	4
Cost (Millions USD)	63

Table 2: GEO cost and payload

To LLO	NASA SLS
Propellant (MT)	338
Weight Payload (MT)	26
Cost (Billions USD)	7.5

Table 3: LLO cost and payload

Research, Development, and Operation Expenditures/Value

Space Tug Cost Analysis	Costs (Millions USD)
Research Costs	1200
Production Cost per unit <i>Unit = Space Tug?</i>	121
Cost per unit with 3 initial units	521
Cost of putting each unit into LEO (via Falcon Heavy)	45
Asset depreciation per mission (assuming 10 missions per unit)	56.6
Insurance <i>Launch + servicing?</i>	20
Cost of propellant per mission (10 tons)	0.07
Cost of launching propellant via Falcon Heavy (10 tons)	15
Total cost to company per mission	91.7
Cost to Customer (with standard 40% profit margin) <i>high</i>	120.34
Cost with launch (Falcon Heavy) 34 MT cargo to LLO	220.34
Cost Per Kilogram to LLO (Thousands)	6.186

We usually
use
non-recurring
(1st unit)
recurring
cost

Total: \$

might
want
to break
table

seems high

seems low

*will your
payload
require
insurance
that it won't
break due
to the tug?*

Table 4: Forecasted expenditures and value

Research costs are estimated through typical Lockheed Martin satellite research production costs when contracted to NASA. Estimates based off of communication satellites were used due to their design for repeatability, large scale, and relatively simple system goals. These satellites are designed to be stationed at GEO so their electronics packages and overall architecture is designed to survive the high-radiation environment, similar to the constraints on Argo. Production costs per unit were also estimated using production costs for communication satellites given that they are often repeatedly made from a single design (and thus do not have as much research costs included in their production costs). The overall cost per unit is determined by taking the research and development costs, dividing them by the number of initial units, and adding it to the cost of production of each tug. Given that we offer a transportation contract we also must charge for insurance on our cargo in case of tug failure during mission.

With a profit margin of 40% per mission, it would take 6 missions per space tug (approximately 3-4 years) before Argo would be profitable.

*I don't think you could ~~ever~~ get a gov. customer to pay that much.
~20% more reasonable.*

Business Considerations

Expenditures

Research, development, and initial launch of Argo comprises of a majority of our expenditures.

Partnerships

We would likely partner with NASA to develop the space tug (similar to how SpaceX developed the Dragon capsule and Orbital ATK developed their Cygnus capsule) as they could provide funding and access to other partners and technologies. We would also want to partner with Orbital ATK for mission planning and craft operations given their reliable reputation. *NASA likes to see small business partnerships as well*

Contracts

Initial contracts would be through NASA and would likely take the model of the space station construction/resupply program. Many countries and companies could use our system for LEO to LLO (or GEO) but we would be contracted directly with NASA. This is similar to the contracts that SpaceX and Orbital ATK have with NASA to resupply the ISS.

Have you looked into mining companies as a potential commercial customer?

Business Structure

Infrastructure Development Missions

Argo would be used to transfer supplies and modules for developing stations at GEO and LLO. These stations would likely be larger than the ISS and would require multiple trips' worth of materials. Argo is capable of carrying up to 34 tons within 6 months, round trip. When launch aboard the Falcon Heavy is included (the cheapest option to send 34 MT into LEO), each mission would cost our customers approximately \$210.34 million.

Resupply Missions

Missions to resupply a deep-space gateway or lunar base will likely be far shorter (on the order of weeks instead of months) than infrastructure missions, given the far lower weight. We estimate a round trip duration of 2-3 months, allowing Argo to perform up to 20 resupply missions in its 5 year minimum lifespan. These contracts (including launch costs via Falcon 9 of 10 MT payload) would total approximately \$132.16 million per mission to the customer.

Argo Advantages

Argo provides a highly-efficient and reliable infrastructure solution for deploying mass amounts of cargo beyond LEO. Transportation and insurance costs are minimized by reliability, consistency, safety, and reusability and then passed on to the consumer. Alternatives, like chemical rockets, do exist and can complete the missions we are targeting in days. However, chemical systems have a higher chance of catastrophic failure, which can make a deep-space gateway station a risky investment. Chemical rockets also require thousands of tons of propellant to run the same missions and the second stage units are not reusable. These issues reduce profit margins and decrease the feasibility of investment. Argo makes investment in these mission lucrative enough to bring in funds that will make these stations and infrastructure possible.

If NASA is primarily customer, "profit margin" is not applicable. The goal would be to reduce overall project costs.

Structures

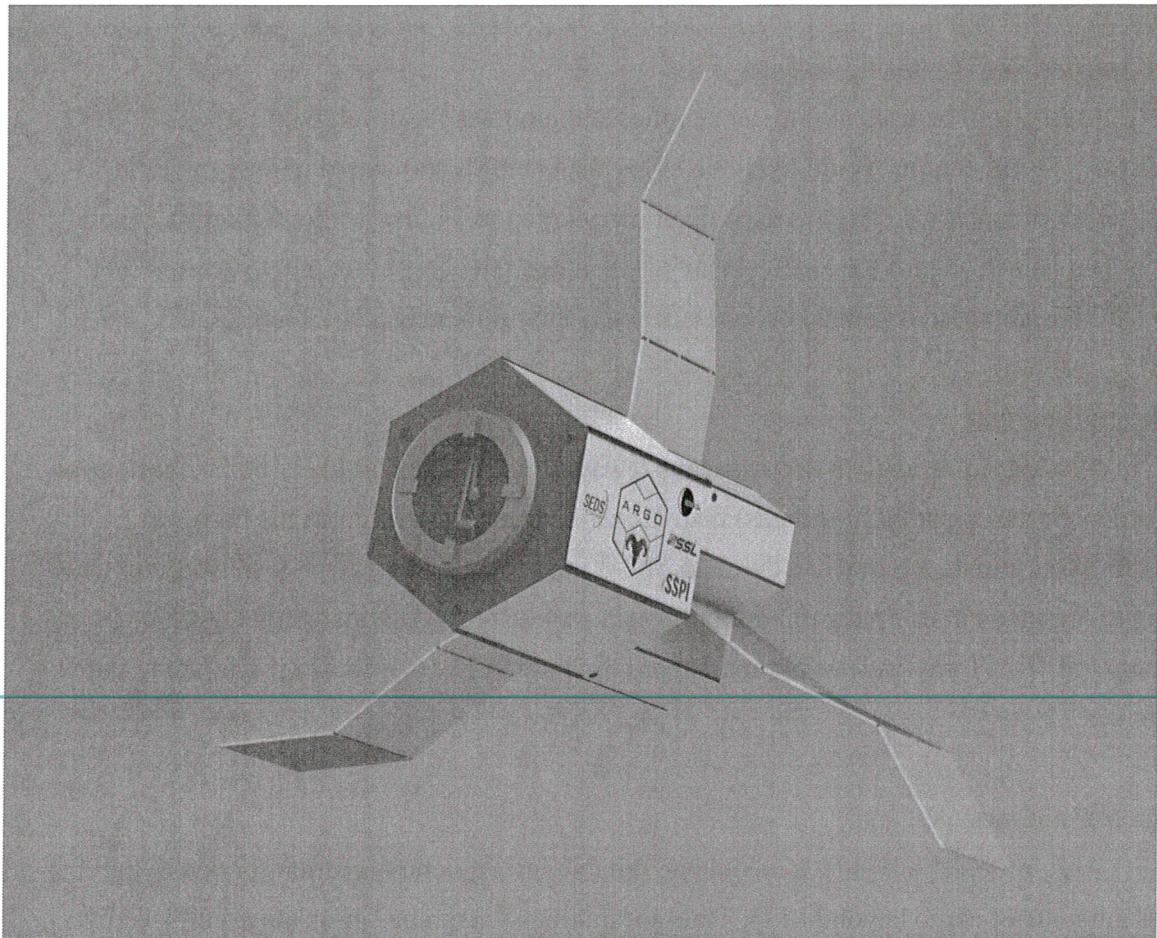


Figure 3: Full Argo Space-Tug

Structural Overview

The structure of the Argo space tug is designed to be modular, durable, and reliable. It must be able to withstand the 720 kN axial load imposed on the vehicle during the launch sequence at maximum acceleration. The figure above shows an isometric view of the vehicle. The major structural subsystems shown above are the following: bus, tank, reactor containment structures, radiators, insulation/shielding, fairing mount/cargo interface. Propellant feed mounts are located within the structure.

← often acoustic is the worst case environment

The Bus

The bus is the primary structure of the spacecraft. It is the main load-bearing structure during the take-off sequence aboard the launch vehicle, and it is where the tank and main electronics are located. The bus is constructed using a combination of aluminum and titanium alloys. While titanium is stronger, it is much more cost effective to use aluminum. Where the frame does not experience as high of loads, aluminum will be used.

The structure of the bus is a hexagonal prism, with the hexagonal faces being located on the ends height-wise. From one face to the other it is 3.225 m. The distance between the two parallel faces of the prism is 3.243 m. The space inside the bus ensures there is enough room for the main fuel storage of xenon, and most major electronics and transmitting equipment. The width of the hexagonal cross-section and height of the main bus structure may decrease if the structure is larger than it needs to be.


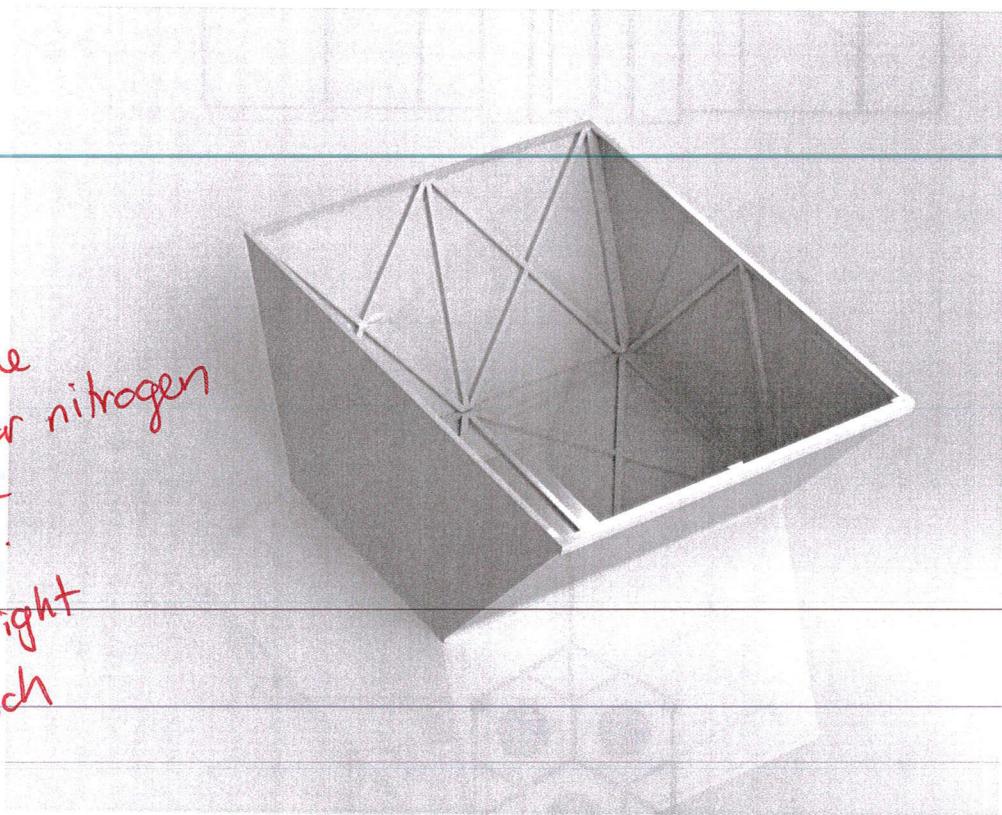


Figure 4: Main Bus Structure

Main Tank

The largest storage tank in the bus contains xenon, which powers the thrusters. The main tank is a composite overwrapped pressure vessel (COPV). A very large tank is desired, because it optimizes space and weight. However, if any faults or leaks are found during testing and fabrication of the tank, the xenon will be distributed to several smaller vessels which would be very similar in size. This multiple tank option would make the filling of the

↳ wouldn't you just fix the design and requalify?

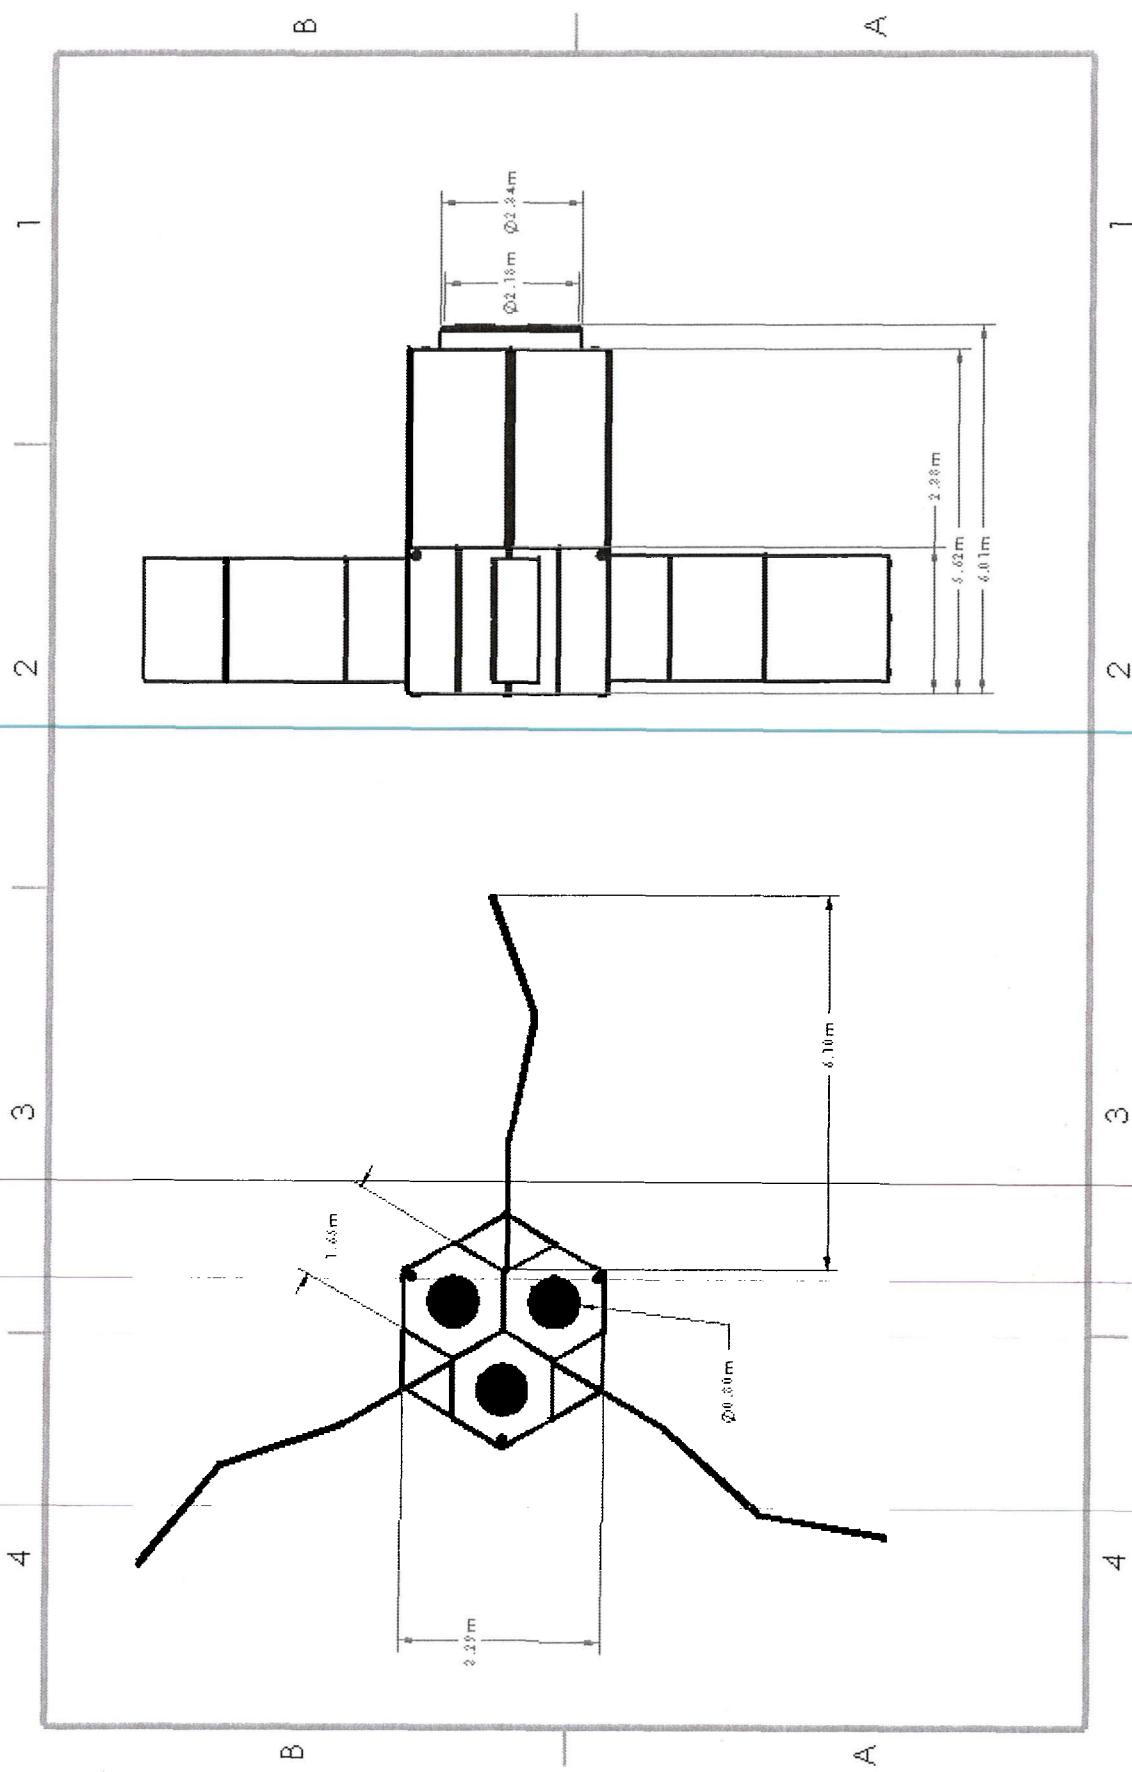

xenon feed system slightly more complicated as there are multiple tanks, however testing could determine the optimal way to do this. This will be further discussed in refueling methods.

The tank shell is made of a carbon fiber, Torayca T-1000 and 31-43 b resin. The liner is made of an aluminum alloy. Lining the tank is Al 2219-T62, chosen for its high strength.

The tank is approximately 2.5 meters in diameter, yielding 7.7 cubic meters of storage. There is a single opening which allows gas to flow between the propellant feed system. It will experience pressures up to 1500 psi during operation. Smaller scale versions of this tank have been shown to not fail until over 10000 psi (Ray), while maximum operating pressure for these tanks is 6000 psi. The high pressure rating on this tank prevents the tank from being a mode of failure. Testing would also verify that the larger version of this tank has pressure thresholds analogous to smaller versions. The tank requires a heater, which will use excess heat generated by the reactors.

we usually report tank size by kg of fluid, e.g 3800 kg ox tank

mitigates risk - usually say:
large margins between op pressure and burst pressure reduces development risk

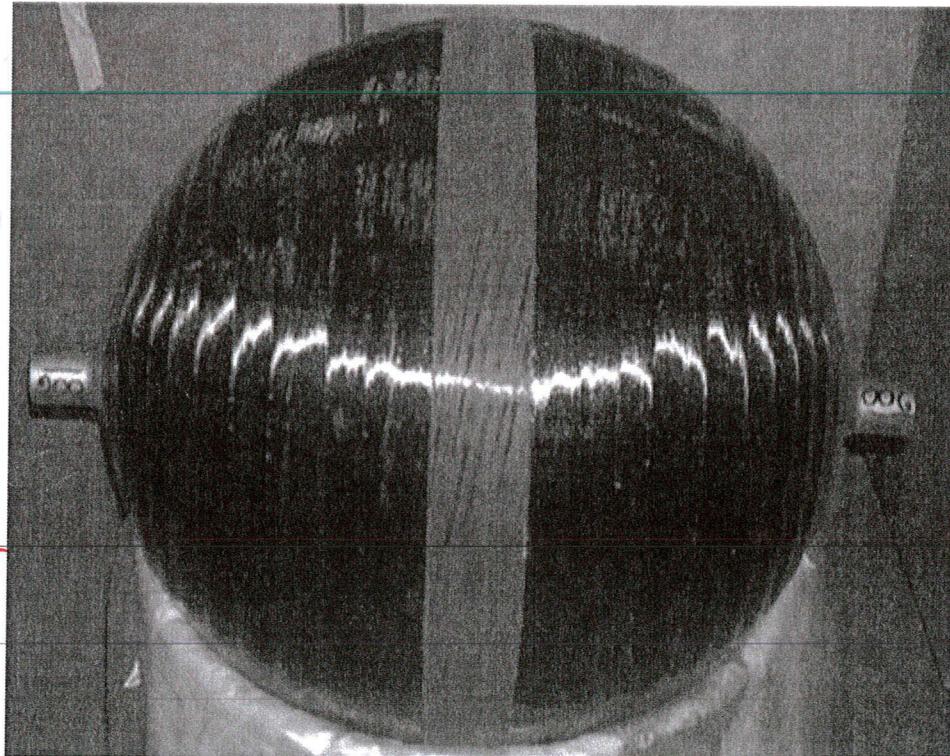


Figure 5: Scaled down tank. Courtesy of Ray/NASA

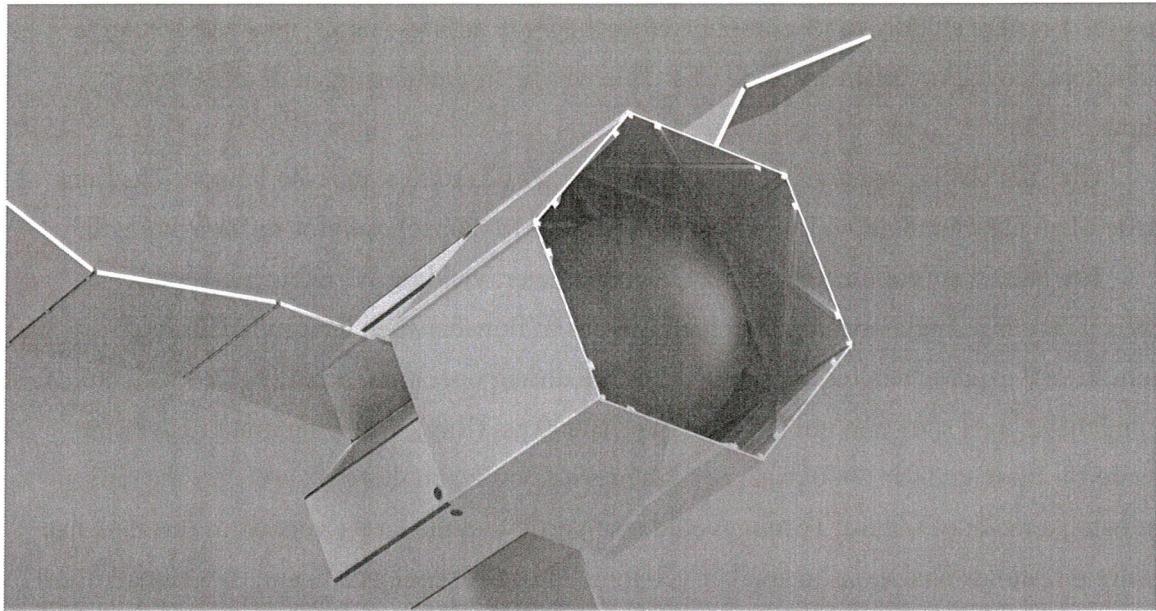


Figure 6: Mock Tank structure in Bus. It is gold because of the insulation wrapping it.

Thruster Head and Reactor Busses/ Containment structure

On the back of the space tug are three scaled structures in parallel alignment with main bus. Each scaled bus contains a reactor [to power its respective thruster head] as well as a low pressure system which is discussed in the propellant feed section. Careful insulation of the reactors will be incorporated to prevent interference between the propellant feed and electronic systems. From one parallel face to another is 1.635 meters. The length of the bus is 2.37 meters, with a total structure length within a fairing of slightly over 5.5 meters.

The main components in the interior of the structures above are the reactors and their insulating equipment, and the propellant feed systems. Notice the hole in the leftmost face of the structure in Figure 7, this is the location of the X3 thruster. As with the main bus, the height and the size of the hexagonal faces of the reactor busses will decrease if space can be further optimized.

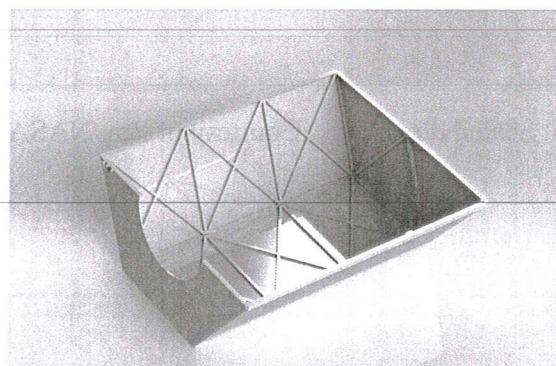


Figure 7: Secondary Bus

is there cross-strapping
for redundancy?

Insulation and Shielding

The plumbing system, including the main xenon tank and its pipes, will be shielded from temperature changes by Multi-Layer-Insulation (MLI), which is comprised of multiple thin layers of common satellite-insulating materials. Due to the need to radiate heat generated by the nuclear reactors away from the spacecraft, the bus structure will have no thermal shielding.

Will it need radiators? we use "Optical Solar Radiators"

*? will look
like solar
array
cells.*

The sensitive electronics inside Argo will be protected from radiation by a graded-Z shield. This type of shielding consists of a high-Z material (Tantalum) sandwiched between two layers of a low-Z material (Aluminum). The electronics will also be thermally shielded with MLI.

↳ Generally, inside the spacecraft, too much heat is more of a problem than too little.

Radiators

Three sets of infrared radiators are attached to aft portion of the craft on the reactor busses. They will be folded during the launch sequence, within the empty space around the containment structures. After ~~their~~ separation from the launch vehicle, the radiators will unfold.

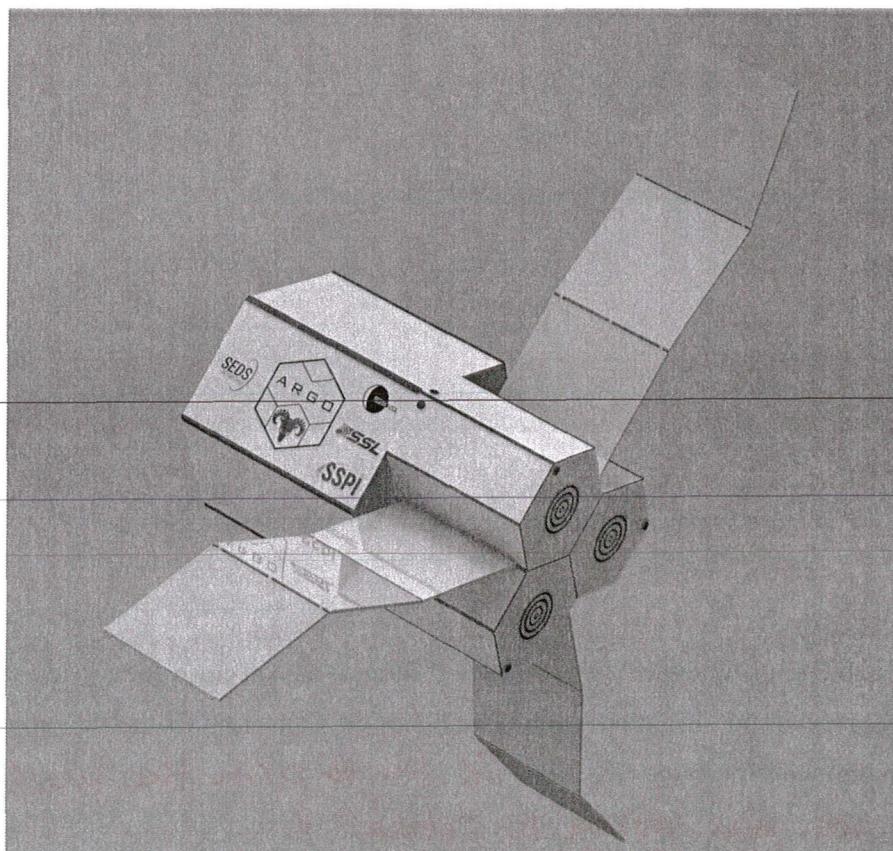


Figure 8: Radiator System

Launch Vehicle Adapter ring

They all
use the ←
same
adapter
interface →

We usually get a list of
LV from our customers.
Must be designed for:
Atlas, Proton, Ariane...

Fairing Mount

Argo's fairing mount is the tug's means of securing itself its vessel during its travel from Earth. The fairing ^{mount} is located on the posterior hexagonal face of the craft, and designed to be compatible with the mechanical payload interfaces of crafts such as SpaceX's Falcon 9.

The diameter adheres to their specification of 1 ½ meters (Explorations); furthermore since the craft will have a [medium] ^{Is this a standard definition? Could you mention} payload mechanical interface, it will operate in design and functionality in accordance with its respective EELV Standard Interface Specifications. In addition, the fairing mount is made to be reusable and modular in the case of the craft being taken to and from Earth by different crafts. [The fairing mount is pneumatically actuated by the xenon already within the system.] ^{I There's the physical contact point}

and then there's the separation system. ^{Is this paragraph about the separation system?}

usually, we buy
these from a vendor.
It's best to use
something flight
proven, particularly
for insurance.

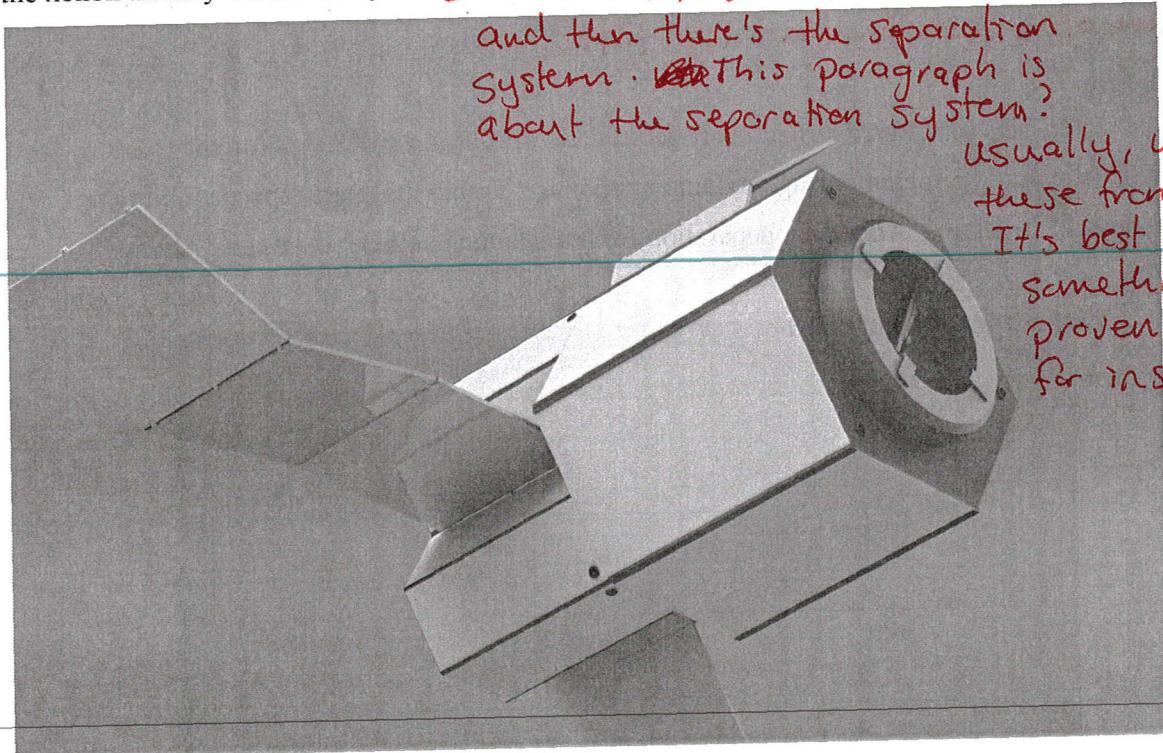


Figure 9: Fairing and Robotic Arm. Note the thrusters

Robotic Docking Arm

The docking arm is inside of the fairing ring. When Argo is close enough to the payload, the arm reaches out, in a manner comparable to the Canadarm on the ISS, aligns the fairing rings, and mounts the cargo to Argo. ^{Is the arm the load path, or are you going to "dock"?}

Xenon thrusters are typically low thrust. ~~so slow~~ Can they be responsive enough to do safe RPO?

Thrusters

Thrusters are built into the system and utilize on-board xenon as their propellant. They are located around the space tug to provide attitude control. Figure 9 provides possible thruster locations. The locations chosen are currently shown to maximize their possible efficiency. *Also need to have full 6 DOF control of the vehicle for RPO*

Plumbing Mount

why these materials? Aluminum is susceptible to fatigue.

A plumbing system, consisting of [aluminum and titanium] pipes, will carry xenon from the tank to the propulsion system through use of a pressure differential. Due to the relatively small size of the plumbing system, within the support structures the individual components of the system - valves, pipes, and three small tanks per thruster - will be mounted on an interior vertical wall onto a metal plate. This plate will provide stabilization and support throughout Argo's launch and time in space. The materials chosen will serve to maintain the pressurization of xenon throughout the system. The exact means of maintaining the system's designated PSI is described in more detail in the propellant feed section.

you probably also care about corrosion and fatigue.

Electronics

Electronic Power System (EPS)	
Power Source	
Distribution A	<ul style="list-style-type: none">Various supply distribution strategiesProvide >12v rails.
Conditioning & Protection A	<ul style="list-style-type: none">Initial power conditioning from Nuclear &/or SolarProvide initial V&I measurement, limiting, and protection circuits
Backplane Interface	<ul style="list-style-type: none">Distribution B<ul style="list-style-type: none">Interface for modular electronics package backplane powerProvide 12v, 5v, 3.3v supply rails (depending on module req).Conditioning B<ul style="list-style-type: none">Voltage and Current limiting and measurement

Communication	
RMC – Radio Management Controller	<ul style="list-style-type: none">Communication between ground station and spacecraftTransceiver, Data Uplink, Data Downlink<ul style="list-style-type: none">S-band, X-band, UHF, (TBD)
OBCC – On Board Communications Controller	<ul style="list-style-type: none">Communication between spacecraft subsystemsCommunications Bus Management/Coordination<ul style="list-style-type: none">I2C, UART, Spacewire, MIL-STD-XXXX, FBBD

Guidance Navigation & Control (GN&C)	
Attitude GN&C	<ul style="list-style-type: none">Software<ul style="list-style-type: none">Guidance from ground station input to control softwareNavigation takes spacecraft sensor data as input and is fed to control softwareHardware<ul style="list-style-type: none">Actuation: RCS, spin stabilization (dependent on operational mode)Dynamics and Kinematics to aid in determination of actuation accuracySensors: IMU (Gyro/Accelerometers),
Orbital GN&C	<ul style="list-style-type: none">Software<ul style="list-style-type: none">Guidance from ground station input to control softwareNavigation takes spacecraft sensor data as input and is fed to control softwareGuidance uses desired waypoints or desired trajectory & cc with orbital elements and inertial position and velocityHardware<ul style="list-style-type: none">Actuation: Thrusters, RCS,Dynamics and Kinematics to aid in determination of actuation accuracySensors: Star tracker, GPS receiver merges with dynamics module & IMU data

Command & Data Handling (C&DH)	
Nominal Handling	
On Board Computer (OBC)	<ul style="list-style-type: none">Main controller for spacecraft all spacecraft functions via digital data linkOperational mode & parameter changes, software up-link
Data Storage	<ul style="list-style-type: none">Flash storage for high speed transfer when in range of ground station
Error Correcting Code (ECC)	<ul style="list-style-type: none">Registers in triplicate, majority rules strategies
High-Priority Commanding	
Analog C&C for limited functions	<ul style="list-style-type: none">Analog gate arrays, etc.NON-DIGITAL communication bus, Pulses and/or Tones

Docking Control System (DCS)	
Relative Position Determination and Control	<ul style="list-style-type: none">Employ relative GPS and distance sensors to determine relative position and velocity16 degree of freedom XY platform to determine orientation and for remote docking maneuver
Adapted GN&C separately for docking purposes alone	

Figure 10: Electronics System Overview

Control Systems Overview:

The control systems for Argo will be capable of guidance, navigation, and control (GN&C) in LEO and LLO. These systems will also be responsible for making many complex maneuvers while the space tug is in cislunar space. *RPO w/ cargo has the most difficult maneuvers - this usually implies temperature - a bit confusing here*

Argo's normal operating environments dictate many aspects of the control systems design, and the techniques necessary to ascertain and achieve such orbital paths. Many aspects of Argo's GN&C architecture are affected by our choice of propulsion as well.

Electronics Subsystem Concept

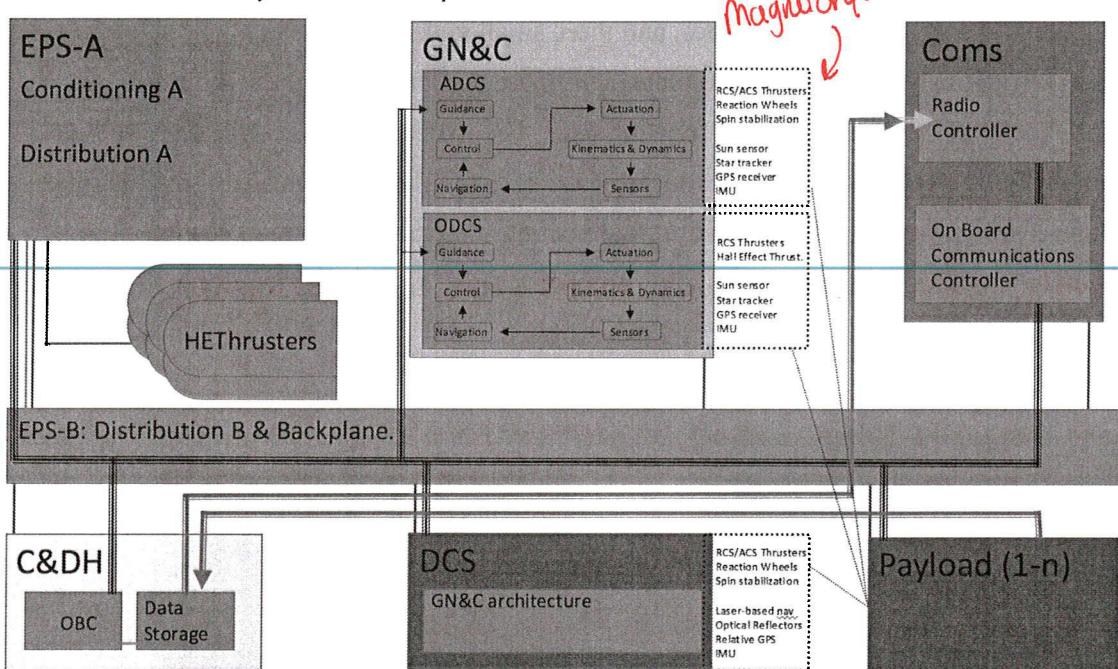


Figure 11: Electronics systems conceptual diagram. High speed data lines are double-lined green arrows, low-speed data lines are represented by triple-lined black arrows, and single red lines represent power via backplane.

High and low speed are relative.

Guidance, Navigation and Control (GN&C):

In general, the GN&C system is responsible for determining a current position, and comparing that position with a given trajectory, and determining which maneuvers may or may not be necessary to correct or maintain the nominal position. In the case of the Argo Space Tug, this is broken down into two main subsystems; Orbital GN&C and Attitude GN&C.

Do you know what kind of data to know about a comms budget?

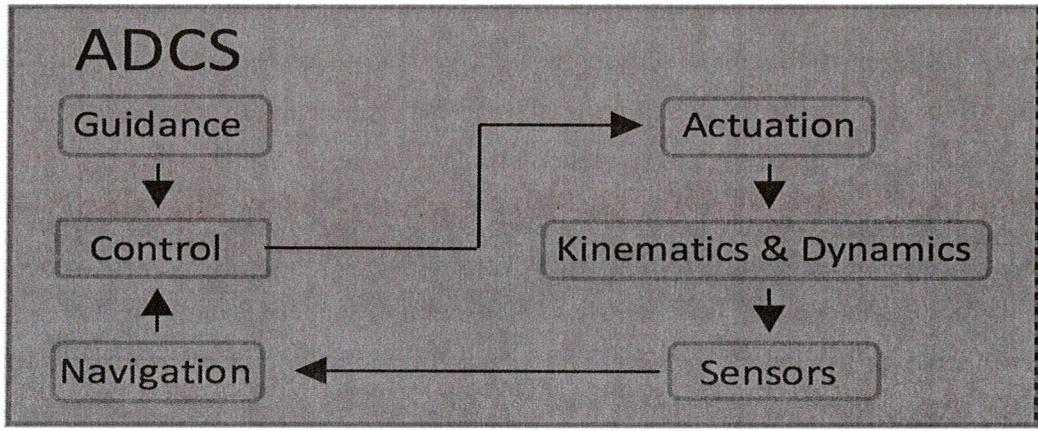


Figure 12: GN&C control flow

Orbit and Navigational GN&C subsystems will have a virtually identical operational control flow. The two subsystems vary only in their sensors, and the task specific actuators; although software will vary greatly between the two subsystems. GN&C communicates with radio and on-board communication managers to receive and transmit data to the ground station and interface with the Command and Data Handling module for more autonomous operation.

Orbit GN&C:

Orbital elements (a, e, i, ω, Ω) are ascertained to determine inertial position and velocity, and used for guidance, through the use of the on-board inertial measurement unit (IMU), GPS receiver (when possible), sun sensor, and star tracker. Filters will merge their sensor data with on-board dynamics models to achieve autonomous navigation solutions when ground station interventions are not necessary (nominal operation). Actuation will be delivered by Hall effect thrusters and reaction control thrusters.

Attitude GN&C:

Attitude shall be determined based on data from the orbital GN&C sensor set. The ACS thrusters should achieve and maintain stable attitude, but magnetorquers may be implemented to provide lower fuel consumption when located in LEO in a non-critical operational state.

Command and Data Handling (C&DH):

The command and data handling module will be responsible for handling and communicating sensor data and ground station commands to the orbital GN&C system. The

*Labeling makes this confusing. Might want to do paragraph #'s (eg 1.0, 1.1.1, etc.)
Usually C&DH would get its own section - this seems to only address C&DH of the nav/GNC data*

You get to pick it. There are certainly space-grade processors that can do this.

A will

On Board Computer, if able, be used to handle some of the guidance information and dynamics. In the event that communication with the ground station is not possible, the C&DH module will be responsible for storing trajectory data for the downlink. Power consumption of the Command and Data Handling module is estimated to be 1.2 Watts. This information is best in a budgets section: mass, power, thermal, comm, latency, etc.

Radio Communications Controller/Manager:

Expected data transfer performance of radio communications is up to 16 kbps downlink and 4 kbps uplink. A high data rate S-band transmitter will be on board and capable of up to 3.4Mbps downlink speeds, which will serve to transmit the data stored on flash storage in Command and Data Handling module. Many transceivers and transmitters which meet these criteria and allow for in-flight configuration of data-rates and output RF power are available. Power consumption of these two components will require a maximum of 24.2 Watts. Too low if this includes the amplifier for the RF system. One TWTA ~75-150 W

On-board Communications Controller/Manager:

On-board communication will likely utilize I²C, SPI, CAN and UART protocols. Space Wire is a possibility, but testing and debugging using Space Wire will likely prove difficult given our resources, and debugging and testing are a vital part of risk mitigation. The on-board Communications Manager will act as the master in all serial communication between modules in the electronics tunnel. Data which needs to be 'translated' will be stored in triplicate before being sent to the receiving module. In the case of discrepancy in the data, majority-rule 'voting' will be used. The data which matches the majority stored will be transmitted. Some of these tasks are likely to be implemented in the OBC as part of our data handling subsystem. Power consumption of the on-board Communications Controller/Manager will be factored into the C&DH power budget (~1.2 Watts max). The first time used

why more difficult than others? What variables will drive the decision?

spell out acronyms

Command and Data Handling (C&DH):

Flash storage within the C&DH will store data until high speed downlink is available, which will then be sent via high data rate S-band transmitter to the ground station. The on board computer (OBC) will assist in on-board communication management and majority-rule voting procedures.

Capitalize acronyms

Backplane:

Argos Power System

The electronics backplane will facilitate communication lines throughout the electronics tunnel. A communication bus will be available to each module for any protocol selected for Argo in parallel so that the failure of any module shall not interfere with data transfer to the other modules.

*Another way to say this is "2-for-1 redundant"
or "cross-strapping"*

EPS

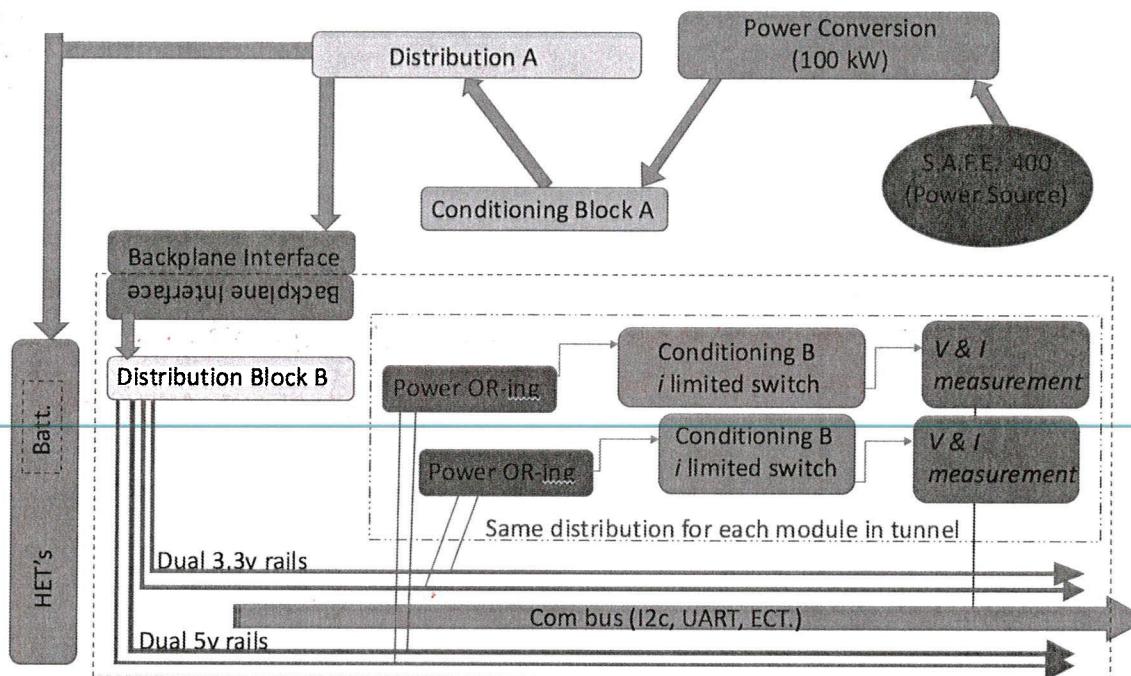


Figure 13: Electronic Power System (EPS) conceptual diagram.

EPS Overview:

Argos electronic power system largely consists of two sections, A & B, which provide distribution and conditioning of the power provided by the Brayton-100/SAFE-400 power source. A block distribution and conditioning ensures that the power necessary for the Hall Effect Thrusters to achieve their required thrust is conditioned and available. B block distribution and conditioning takes care of the electronics module mounted in Argos tunnel architectures; [triggering between nominal to high-priority handling if power is at a premium.] *I Didn't quite follow this bit*

Power Distribution:

Block A: Power made available from the SAFE-400 and 100 kW Brayton Cycle conversion system will be conditioned and distributed as to provide Argos Hall Effect Thrusters with the power necessary to maintain or achieve the thrust necessary for the

don't need to repeat

Your power distribution should first and foremost provide power to mandatory aliveness functions – thrust should be secondary priority.

required maneuvers underway. Remaining power will be routed, conditioned, and divided to provide the backplane interface with the supply rails necessary for the modules populating the electronics tunnel.

You will probably want 100V for heaters/processors. 30V can easily be stepped down to lower voltages. 3.5V will have significant loss through cables. Same reason power companies use high voltage lines to get power long distances.

OK to say: Argo is designed to support... You will make it happen b/c. you are such awesome engineers!

Block B: Power distribution will be handed through the backplane interface as 12, 5, and 3.3 volt dual-redundant rails which will run along the backplane. Each module will be configured to select the appropriate rail from the power bus when connected to the backplane. At each of these sockets, supply OR-ing and current limiting will help to ensure proper distribution.

Power Conditioning:

Block B: Alongside power supply OR-ing and current limiting at each socket, the backplane will provide voltage and current measurement to the OBC via I²C bus to aid watchdog circuitry in order to ensure that the correct power is being provided to each module.

would help to introduce this sooner. You were using "tunnel" w/o really explaining it before

Backplane & 'Tunnel': The backplane serves three main functions; namely to provide the electronics tunnel with a reliable power, communication, and structural bus. Argo shall be equipped with three 'tunnels', in a three-unit cubesat standardized structural package, inside of which exists the backplane into which all sub-system modules are integrated. Our hope is to be able to provide Argo with the ability to send hard backup modules along with fuel and/or payload modules and use existing cubesat standards (such as pea-pod fairing adapters) to potentially replace damaged or out of date tunnels with new hardware. Our intention to maintain a ten year operational lifespan, means that it may be necessary to replace electronic hardware before electronics packages have reached their maximum total-dose of radiation.

When in LEO, a replaced electronics tunnel will allow Argo to potentially always have a functional electronics module with an extremely low level of radiation exposure; adding to the robustness of the entire system when using majority-rule voting among data registers. This could potentially provide a sort-of reset of total-dose radiation on a whole electronics package. The backplane interface will be mounted in the rear of the tunnel's 'socket' which will make contact with the rear of each new tunnel at the backplane interface, using gold plated 'pogo' contacts to ensure a strong electrical connection for all power and communication lines between the three modules. While the 'old' tunnel has been ejected, two tunnels will still be on board as to maintain the space tugs functionality during a tunnel swap.

Potential trade study: shielding is mass you have to carry around. Is it better to replace or shield?

	Solar Array	Nuclear
Safety	Green	Red
Mass	Red	Green
Power Gen	Yellow	Green

← You could do a table like this to visually show the trade study Power

Power System Overview:

Argos power system consists of three SAFE-400 nuclear fission reactors, coupled with Brayton Cycle power nuclear power conversion modules capable of providing 100 kiloWatts of electrical power each. This heat-pipe power system will provide Argo with sufficient, reliable, and consistent power for all of the Hall effect thrusters and essentially render the remaining power demands of the electronics systems negligible.

Nuclear Versus Solar

While solar arrays are an easy solution for many satellite applications and would be the safest option for power, there are many issues that make solar an ineffective option for Argo. Argo would require a minimum of approximately 81,000 square feet of solar panels with equivalent energy density to those used on the ISS, that is about the size of 1.5 football fields. To be able to operate while in Earth's shadow, Argo would also need to carry battery arrays and would need to almost double the size of the solar arrays to 150,000 square feet. Even with new solar cells that will be introduced within the next five to ten years, like those developed by Space Future, the power systems would weigh approximately three times as much as the SAFE reactors and their Braytons. We would also need to deal with inertial dampening of our acceleration due to the long arms of mass, and the risks of damaging the arrays when docking with cargo (or by just accelerating too roughly). All of these issues make solar a non-viable option for use with Argo.

seems a bit extreme - are you saying batteries = mass = more thrust = more power?

Safe Affordable Fission Engine 400 kW (SAFE-400) Reactor:

The SAFE-400 nuclear fission reactor is fueled by uranium nitride; widely considered safer, stronger, more tolerant to temperature and thermally conductive than other sources of nuclear fission. Each reactor is able to provide 400 KW and weigh approximately 512 kilograms each.

how are you going to dump all of the extra power when the thrusters are not in use?

Brayton Cycle Power Conversion:

The Brayton Cycle power converters currently selected for use in Argo's power system will make 100 kiloWatts of usable electric power available from each SAFE-400. The remaining 300 kW will be radiated as waste heat. The power converters will encase the reactors and simply converts heat from the reactor into electrical energy. Thermoelectric generator technologies which use thermoelectric couple arrays and heat distribution blocks are currently being considered by our team. However, brayton power converters are currently

These are
so big
radiators!
Why so
much
waste
heat?

our top candidate for conversion as research currently conducted on SAFE reactors at NASA readily cite it as the best, and most compatible, candidate for power conversion.

Propulsion

Propulsion Overview

The propulsion system of Argo is selected to provide the thrust necessary to complete the required orbital maneuvers in a low cost, efficient manner. Argo ~~aims~~ ^{is designed} to complete a round-trip from LEO to LLO within 6 months transporting a payload of 34 metric tons. Additionally, the propulsion system is required to handle pointing and payload rendezvous. These design requirements, along with a limited power supply and the necessity of limiting mass established the propulsion system sizing and specification.

Generate thrust
required for
pointing...

Electric Propulsion

Electric propulsion was selected as the system of choice simply for its specific impulse. With the design payload mass of 34,000 kg and estimated structural mass of 6,000 kg. A chemical propulsion system with an estimated Isp of 450 s, utilizing a simple ~~Hoffman~~ ^{Hohmann?} transfer, would require 76,000 kg of propellant for the outbound trip alone.

It is simply not feasible to supply Argo with the required propellant for a chemical propulsion system operating regularly. Conversely, a propulsion system operating with higher Isp requires less propellant. Electric propulsion offers higher Isp for decreased thrust and high power requirements. Neither of the trade-offs directly affect the mission parameters.) ?

Affects

Hall Effect Choice

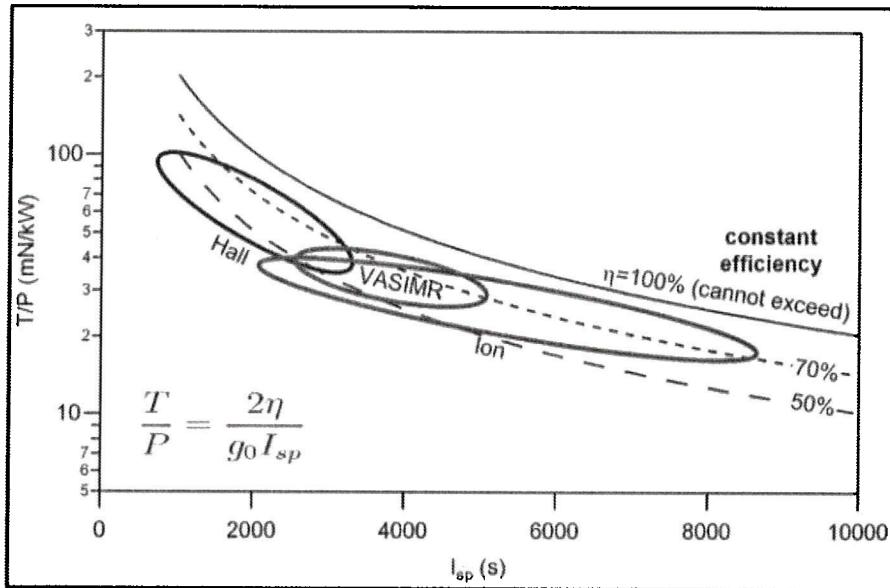


Figure 14: Thruster and input power vs specific impulse

Now the decision comes to which type of electric propulsion. We considered gridded electrostatic ion thrusters, Hall effect thrusters, and VASIMR. Structural and operational concerns limited the power supply to 3 SAFE reactors, delivering a total of 300 kW for use by the propulsion system.

An analog to the Argo project is NASA's design work considering asteroid redirect missions. Figure 14 is their comparison of various electric propulsion systems^[1].

Round trip mission duration requirement of 6 months places a lower bound on craft acceleration. Because of limited power and massive payload size, the craft needs high thrust per unit power (over 50 mN/kW). This places the propulsion system firmly in the Hall region.

We strongly considered VASIMR as the propulsion system because of its' throttability and promising scalability, but ultimately declined for two reasons. One, Argo can not meet the power requirements without doubling the number of reactors. Two, VASIMR is strictly an experimental system, its reliability and operational lifespan is yet unknown.

Gridded Electrostatic ion thrusters were also considered. Nevertheless, thermal and vibration constraints limit the maximum size of the thrusters to around 40 kW each.^[2] Argo would require an array of the thrusters adding to the complexity of the design. Although these thrusters are highly reliable with a long operational lifespan, Argo still is unable to meet the power necessary to achieve the required thrust.

Launch
Vibration?

Hall effect thrusters do suffer from several flaws. Their operational lifespan is usually limited to 10,000 hours. Also, their Isp is lower, requiring additional propellant, but this cost will be passed on to our customers.

Engine Lifespan Optimization

As mentioned previously mentioned, the current lifespan of Hall-Effect thrusters is estimated at 10,000 operating hours or 415 days, about a year and two months of constant operation. For most low thrust orbital transfers, the thrusters are not operated continuously during the mission. Estimating engine operation to be around 50% of mission duration, the operational lifespan would be 830 days or two and a quarter years.

Argo's desired operational lifetime is ten years, but anything above seven would be considered successful. A round trip is estimated to be around 190 days with a full load of cargo. Argo can reasonably expect to complete ~~4~~^{four} trips, but possible wall degradation of the Hall effect thrusters means that future missions would not be ensured to be successful.

There are four solutions to this problem. One, operate the thrusters for less time per transit, which would increase travel time and limit transit trajectories. Potential customers may grow weary and choose other space tug services with fewer delays. This solution does not solve the underlying problem. The second solution is to improve the thrusters by upgrading the cathode and anode walls to be more resistant to erosion. Research on technology for magnetic shielding of parts vulnerable to corrosion may increase thruster lifespan in the near future. If additional power becomes available, due to say increases in reactor efficiency, the thrusters can be run at greater power and higher Voltage drop for greater thrust and faster transits or less operation time per transit. The fourth solution is to use Argo's modular design to service and replace the hall effect thrusters to extend the craft's operational lifespan.

X3 Engine Architecture

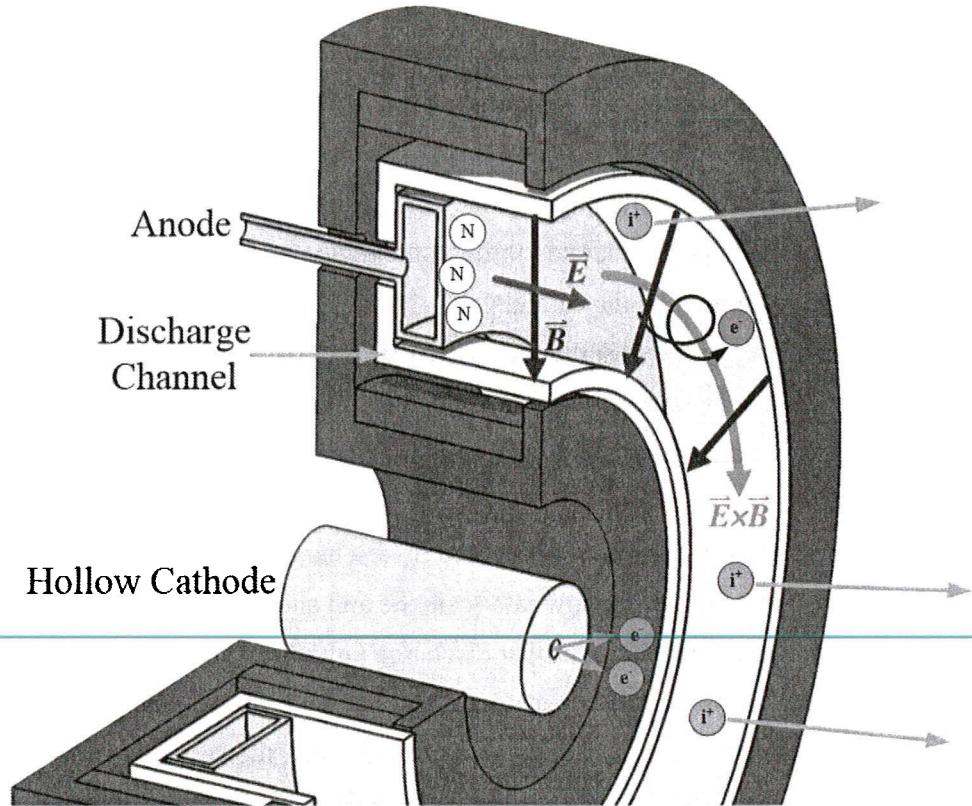


Figure 15: Engine Architecture

The prospective engine for Argo is based on University of Michigan's Plasmadynamics & Electric Propulsion Laboratory's X3 hall effect thruster. The X3 is 3 channel, nested stationary plasma thruster designed to operate up to 200 kW and 8 N. The thruster has been characterized up to 100 kW and 5.4 N^[3]. Argo plans to operate 3 thrusters of similar size at 100 kW each. Does this match earlier about rejection 300 kW?

There are two major variations of Hall effect thrusters, stationary plasma thrusters and thrusters with anode layer. Stationary plasma thrusters operate by creating an axial electric field by biasing the anode to 400 V (in the case of the X3). A radial magnetic field is generated by electromagnetic coils. The X3 features a centrally-mounted cathode surrounded by three discharge channels with anodes and 2 electromagnets each.

The primary failure of hall effect thrusters is erosion of the wall due to ion contact. Current research exploiting equipotentialization along magnetic field lines shows great promise by utilizing magnetic shielding to maintain low ion velocities near the channel walls. The X3 is currently unshielded. However, it is reasonable to assume that shielded thrusters of

the same class can and will be produced in the relatively near future. An advantage of the nested channel design is that failure of one channel does not lead to complete mission failure, Argo can still function using the other channels.

To begin operation, the cathode is heated and ignited to release seed electrons (thermionically) which are trapped at the discharge channel. When neutral propellant is introduced through the discharge channels, it is ionized by electron impact. The liberated electrons are trapped in $E \times B$ drift creating the Hall-effect region with strong electric potential. The propellant ions are accelerated through the region and eventually neutralized downstream by electrons emitted by the cathode.

This process naturally incurs oscillations which are still the subject of research. These oscillations possibly contribute to thruster performance and/or wall erosion. The breathing mode is the dominant discharge current oscillations. Thrusters with magnetic shielding also display a spoke mode *What is this?*

Hall effect thruster performance is controlled by discharge voltage, discharge current, magnetic field strength, and propellant flow rate (cathode and anode). For flight vehicles, propellant flow is throttled to maintain constant discharge voltage and current. Thrusters are optimized for one throttle point, but their performance may be adjusted by varying propellant flow rate, anode voltage, and magnetic field strength^[3]. However, the nested channel design allows the engine to be throttled by choosing which channels are operational, with no corresponding loss in performance or efficiency.

The X3 was surface treated with alumina spray to increase its emissivity. This was sufficient to manage the temperature of the thruster.^[3] As a result we assume that no additional thermal management will be required, however additional research is required on operation in space as X3 is designed for operation on Earth.

Add summary paragraph: Argo has selected ...
propulsion system because... .

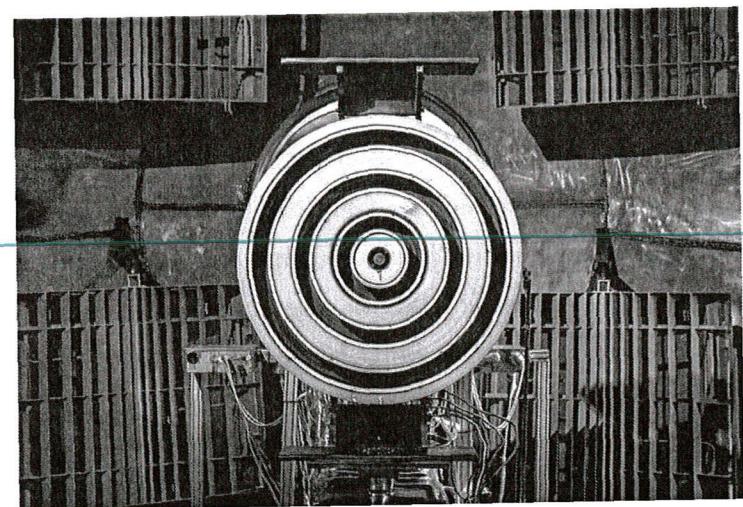
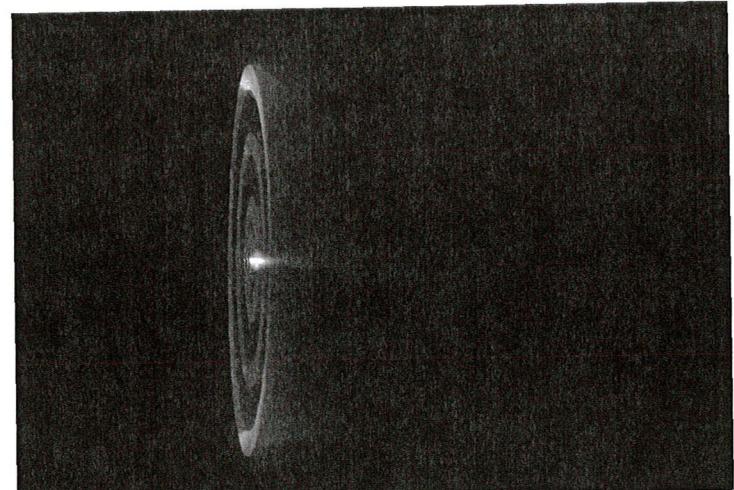


Figure 16,17: X3 Engine engine firing (top) and in test chamber before firing (bottom)

Argo ACS System

Will the cargo be tumbling when you grab it? why can't you have spare thrusters?

Argo needs to be able to accurately and reliably rendezvous and dock with payload.

This requires an accurate and robust attitude control system. Argo is set to utilize a system of 12 cold gas thrusters which use the main propellant, xenon. No redundancy is currently built into the system because cold gas thrusters are highly reliable. Exact location of the valves and piping to feed the xenon to the thrusters are not known.

Six thrusters are mounted externally on the forward sections of the engine buses. They are mounted at the center of mass of the craft (without payload) to ensure accurate translational motion for docking. These thrusters are also responsible for spin control of the vehicle. When transporting the payload, Argo will need to spin slowly so as to limit concentrated sun exposure of any payload surface.

Argo needs to get close enough to and stop before the payload so that it can deploy its robotic docking arm. Three cold gas thrusters are mounted on both the front and rear of the

schematic—simple PPT drawing w/ a box and a thruster locations is ok

You might want to check out MIL-STD-1540D

craft for braking and docking control. For the primary pointing control during transit, the hall effect thruster channels will be throttled appropriately.

Engine Verification Overview

Any engine that we produce or purchase will need to be held to exacting performance criteria. Prior to vehicle launch, the engines will need to be verified on the ground. After launch, additional tests will be required to ensure that all systems are operating as anticipated, before transporting our very heavy, and therefore expensive, payloads.

Dirtside Validation

Before assembling Argo, each engine must be tested individually in a large vacuum test facility. There are many such facilities like University of Michigan PEPL's Large Vacuum Test Facility, where X3 was tested the first time, or NASA Glenn. We will need to reach out to business partners to test the engines for nominal performance in terms of specific impulse, thrust, and thermal behavior. Each channel must be tested independently and jointly.

Each engine will need to be qualified for performance with different mass flow, discharge current and voltage, and magnetic fields, in order to improve the accuracy of our control system which will be responsible for handling the behavior of the engines. Then we will need to simulate recovery from channel failure, so that the control system properly detects and stops the use of a channel compromised during a mission.

It would be beneficial to test to failure a fourth engine in order to experimentally validate the lifespan of the thrusters. Unfortunately, JPL's endurance test facility is only rated for thrusters up to 20 kW, although its fuel backsplatter reduction and recapture capabilities would be perfect for a lifespan test. Another facility will need to be found, in order to accurately determine expected lifespan.

After Argo is assembled, the craft will need to be tested as a whole. This test will look for misalignment of the thrusters and qualify the performance of the attitude control system prior to launch. After determining that Argo can be controlled accurately with minimal performance loss from design, the engine system is ready for launch.

Orbital Verification

Completing an entire trial mission with a dummy payload is impractical considering the limited lifetime of the hall effect thrusters. As a result the scope of orbital tests will be limited. Groundside tests should have already verified each engine's performance

Safety during RPO
↓
crashing into cargo during approach would be bad!

Highly Accelerated Life Testing (HALT) - might want to research HALT test protocols for thrusters

This is true of all subsystems not just engines

This testing is usually done by the supplier.
Are you going to build your own?

End to end →
electrical tests
Power regulation tests
Failure Scenarios

individually. Instead, the primary objective of orbital tests is to ensure no damage to the propulsion system during launch and to verify the results of the groundside tests.

We anticipate navigating through a simple orbital transfer from LEO to GEO, verifying the attitude control system, accuracy of thrust controls, and position tracking systems. Precise data acquisition will be handled by an array of high performance accelerometers. Only once Argo has demonstrated that it can reliably maneuver in Earth orbit, is it time to service paying customers.

probably
don't have
to go that
far if your
cargo will
be in LEO

Orbital Mechanics Approximation

~~The team designing Argo does not have a dedicated astrodynamist. As a result, we have yet to develop a sample trajectory for ourselves. Our transfer mission requirements are, as a result, approximated based on other low thrust trans lunar injection calculations. All of our approximations use craft acceleration (thrust normalized by mass).~~

For the return leg of our mission, the craft is expected to travel without any payload. Argo should mass 6,000 kg and have a thrust of 15 N. This yields a thrust acceleration of 2.5×10^{-4} g. This thrust range is best approximated by Herman 1998 which models craft with 1.0×10^{-4} g of acceleration.^[4] Taking Herman's figures as a lower bound, the return trip should take less than 33 days LLO to GEO and less than 760 kg of propellant. From CCAR, the LEO to GEO transit will take under 7 days. In total, the return trip is estimated to take 40 days and 1000 kg of xenon.^[5]

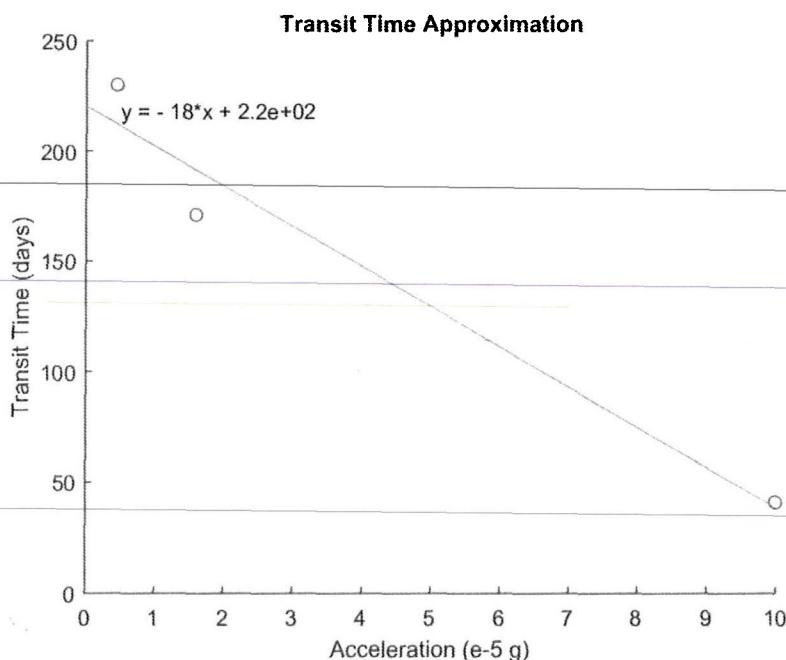


Figure 18: Transit Time vs Acceleration

For the outbound leg, the craft is projected to transport a 34,000 kg payload with its bus 6,000 kg structure, and 1,000 kg of return payload. This yields a thrust acceleration of 3.7×10^{-5} g. Unfortunately, we were unable to locate research in this range. A NASA presentation on Lunar Cubes discusses trajectories with accelerations of 4.5×10^{-6} g and 1.6×10^{-5} g.^[6] Using a first order linear approximation with NASA's and Herman's data, we estimate a transit time of 150 days. Herman 1998 places an upper bound on fuel consumption at 5,200 kg of propellant.

Seems ~~b~~ big

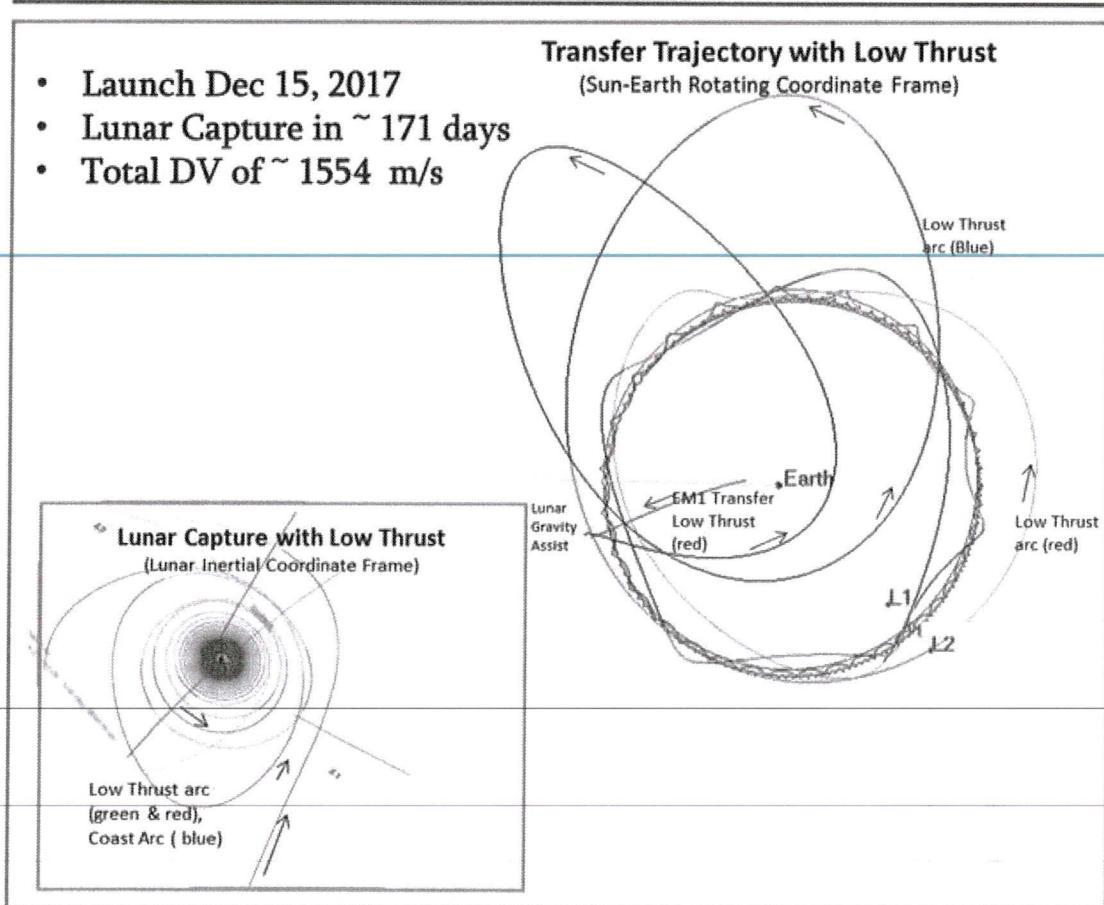


Figure 19: NASA LunarCube EM-1 Transfer Trajectory

For a complete mission, we anticipate it to take 190 days plus time in orbit for payload rendezvous. We anticipate the propulsion system will require at most 6,200 kg. *of fuel?* Under a worst case scenario, requiring excessive use of the ACS system, the craft will use no more than 7,000 kg of propellant.

You have a big R&D budget. Can you say this will be part of the R&D?

Low thrust trajectory optimization is very difficult, because it requires a very good guess at possible trajectory. Interesting work is being done in the field of machine learning for astrodynamical trajectories.^[7] Hopefully, more accurate simulations can and will be run in the near future to improve the efficiency of Argo's transits. On board computer systems may also be loaded with software that can optimize trajectories if calculations/ simulations done on the ground prove to be insufficient or incorrect.

Propellant Feed

Design and Overview

The propellant feed system of Argo is designed to deliver high pressure supercritical Xenon from the main storage tank to the 3 different hall effect thrusters and their respective anodes and cathodes. Several different kinds of valves are being used in the system as well as multiple pressure transducers and temperature sensors to determine if the system is operating nominally or not. Filters are being incorporated before several valves to ensure that the Xenon being delivered to the thrusters is as pure as possible for other particulates could increase the deterioration time of parts in the thruster and jeopardize the entire mission or contract.

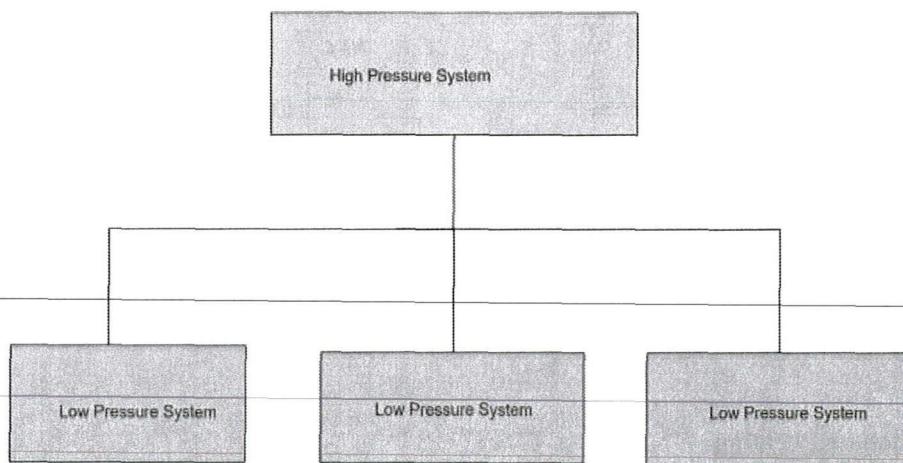


Figure 20: Schematic of System

Acronym?

This is a general overview of the entire system while the P&ID below details the actual system. The first pipe that leads into the system will be large enough to deliver the correct amount to all 3 thrusters. Testing will be done to make correct measurements of the gas being delivered and the reliability/durability of the system. Though adding weight is not always optimal, due to a desired long service life, a redundant system may be added where necessary. I.e. a second high pressure system (excluding main storage tank) to be

Prop system plumbing is usually pretty low risk. You would do validation more than experimentation

added in and a second low pressure system for each thruster for a total of 6 low pressure systems. The long operational lifespan desired of Argo would mean lots of cycles for the all components which could lead to a breakdown or failure in the system. Having redundant system could add life which might offset the added weight and cost.

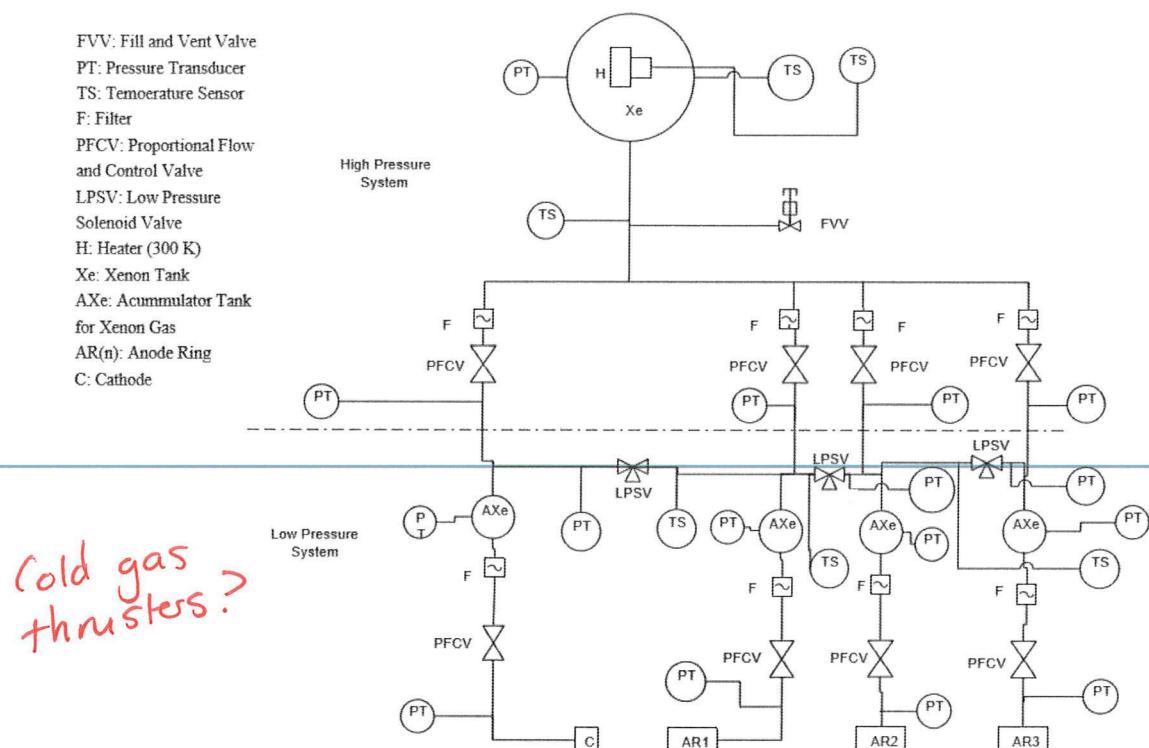


Figure 21: Xenon Feed System

*Note: The pressure drops after the first set of PFCVs and becomes a low pressure system.

The dashed line represents this

Pressurization and heating

Initial pressurization of the tank will be held on the ground and the tank will be pressurized to a pressure of anywhere between 1,000-1,500 psi to compensate for gas leaving the system over time. A heater will be put ~~within~~ ^{outside surface of the} the tank to make sure that the temperature of the tank remains about 300 K so that the xenon maintains its supercritical state. To keep the tank pressurized, helium gas may be added to the system so that the pressure in the tank is kept above the supercritical point. This would make refueling a more complicated mission however. Another possibility is to over pressurize the initial state is well above the supercritical point. The heating will be done from the outside.

*Helium
pressurant
is standard*

Valves

Valves of the xenon feed system are some of the most important parts within the system. Multiple proportional flow and control valves (PFCVs) are used to regulate pressure and flowrate throughout the initial high pressure system and the following low pressure system before the thruster head. The valves that would be used are Moog 51E339 PFC valves as these valves give the desired conditions for the hall effect thrusters and allow for control of the flow in both pressure and mass flow rate. Solenoid valves branch between the channels and are normally closed. These valves serve to get to another branch of the system if something goes wrong within the system, avoiding entire system failure. The valves ~~be~~ are pneumatically actuated.

Flow Control

The flow of Xenon is mostly controlled by the PFC valves as they are regulating the pressure drops and the mass flow rates inside the piping. Pressure relief valves ~~might be~~ added at various places in the system, such as in the low pressure system. Orifices ~~may be~~ added in the valves to get the exact flow rate desired in each branch of the feed system. These orifices will ~~most likely~~ be placed with the filters.

Try to be
more
committed
to a
solution.

Tanks

The Xenon storage tank is designed to hold 10 tons of supercritical xenon. It must hold this fuel for the duration of the mission and afterwards be able to be partially refilled. Although only an estimated 7 tons is needed for a roundtrip, the remaining 3 tons are used for ACS thruster operations (rotation and braking) and emergency maneuvers. Other tanks in the system are accumulator tanks for Xenon. These tanks are much smaller than the main storage and serve as a way to hold Xenon before it reaches the thrusters. The first set of PFC valves are not rated for the entire flow rate due to the higher pressure gas coming from the tank. To counteract this, while in a parking orbit after the initial separation from the rocket the tanks will fill so that during thruster operation, the correct amount of gas will be reaching the thruster head. The thrusters are not being operated the entire time so gas is continuously allowed to flow into the tanks. These accumulator tanks will be of the same kind as the main storage tank, just scaled down versions.

The tank will be fabricated with a safety factor and the maximum pressure it will ever experience is 1,500 psi. According to [Ray], the tanks have an operating pressure limit of over

I might want to use MLA or ~~IEEE~~ IEEE citation style. It made me think "Who's Ray?"

5,000 psi. Tank material is talked about in the structures part of the document. The pressure in all tanks is monitored closely. If adverse pressure is detected, the system will be vented.

Anode Ring Flow Control

Can you vent safely in the presence of cargo? Will you undock first?

In Figure 15, there are three branches of piping that go to the anode. Each anode ring requires the ability to be throttled. To allow this, flow goes directly to each ring individually. This also means if one ring fails, the entire thruster is not useless as flow is still reaching the other thruster heads during operation. Other thrusters will have to be scaled down to accommodate these changes in thrust so that a constant trajectory is maintained. Input power is also able to be controlled to the thrusters which will result in a change in thrust output as well.

ACS System

An attitude control system consisting of monopropellant thrusters are placed throughout the spacecraft. Groups of 2 thrusters will be placed together along axis and will serve to correct small adjustments in the direction of the spacecraft. It will also serve as a pressure relief system in the case that the Fill and Vent valve can not handle all of the relief. The thrusters will be most likely sourced from Moog Space group. They will vent xenon so that hydrazine propellant is not needed in the spacecraft and another pressurization system are not needed either.

Sensors

You're just going to blow pressurized Xe out of monoprop thrusters? That sounds a bit funny to me. If there contamination risk? Wouldn't you get better performance from monoprop system - might offset mass penalty?

Sensors are necessary to understand the performance of the propellant feed system. Multiple pressure transducers and temperature sensors will be placed throughout to make sure all the parts are within their operational limits. If the sensors show that part of the system is failing, then the system will either have to be shut down and restarted or flow will be redirected through another pathway.

Calculations for tank storage

Parameter	Parameter Variable	Calculation
Tank Size	V _{tank}	$V = \frac{M_{xenon}}{V_{xenon}} = 7.7 \text{ m}^3$
Tank Radius	R _{tank}	$R = \sqrt[3]{\frac{3V}{4\pi}} = 1.23 \text{ m}$

--	--	--

Table 5: Tank Calculations

The desired max mass flow rate to the anode is 70 mg/s to each of the rings. The mass of the Xenon that is desired to be carried is 10 metric tons.

Other variables that would be needed tested for or experimentally measured are:

- Head Loss in Pipes, both major and minor losses. Loss coefficients for all valves would be known values.
- Leakage rates of valves and accumulator tanks.
- Piping length and diameter would be determined before testing. Other pipe factors to be considered would be friction factor, the roughness of the pipes being used.
(Probably aluminium, titanium or steel) *make sure this matches earlier in paper, or delete one reference to pipe material*
- Power input to control all valves would also be determined.
- Viscosity of the Xenon flowing in the tubes would be found as well if the flow is turbulent or laminar
- Orifices in the pipes may be added to add further control over the flow.

Refueling Overview

A space tug should be a robust spacecraft that can ideally perform multiple missions over the course of its service life. However, current technology limits how much fuel is able to be sent up on launch, so a refuelable system needs to be designed and implemented to increase service life. Refueling needs to have the correct pressure so that gas flows into the tanks on board Argo. The max pressure of the refueling vessel would have to be determined by the mission contractor *as it is their responsibility to ensure that the fuel arrives with the cargo.* If the cargo load does not permit this, a separate launch vehicle exclusively for refueling purposes would need to be launched as well.

Cargo Refueling

To refuel the Argo space tug, a fill and vent valve is able to be accessed externally. When fuel is sent up with cargo, or separately by itself, a container with the fuel will approach the spacecraft. When it gets close enough, a robotic arm similar to the one that grabs incoming vehicles to the International Space Station will be used albeit on a smaller scale. Once the arm slides the attachments together, ground control will allow the valve to open and more fuel to enter the system. Propellant tanks can also be integrated into cargo and can fill Argo's tank and then be disposed of before departure from LEO. Testing would be done to determine which would work better. The two major factors that would be tested for the refueling method would be to see how control of the tanks Fill and Vent Valve is done

Did you consider a replaceable tank on Argo instead of transferring fluid?

*Is this model reflected in your business case?
Seems like you could charge less to customers if they bring their own fuel!*

*will the container chase Argo? or Argo chase container?
You could save \$ on container by keeping the "Smart" on Argo*

Launch Vehicle capacity? Tank size? other?

and how pressure inside the tank is maintained. For the method where tanks are ejected, testing of the ejection system and hooking up of the tank to the rest of the propellant feed system.

Another possibility that was brought up in the structures system is that refueling would be different with multiple smaller tanks. A possible solution is portrayed below.

CXEe: Tank of Xenon sent up with Cargo to refuel
 FVV: Fill and Vent Valve
 GV: Gate Valve Normally Closed
 Xe T(n): Xenon Storage located within Argo

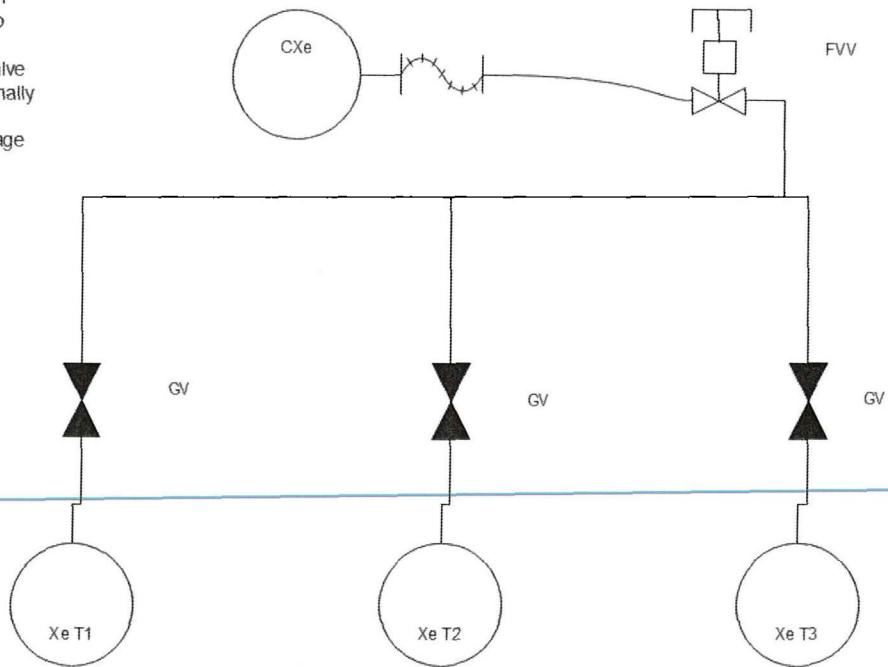


Figure 22: Possible refueling method with multiple tanks

The system would work with the one gate valve opening and xenon flowing into the tank. The valve closing once the tank is filled and then the Fill and vent valve closing and any excess gas in the system being released. Then a gate valve opened and the fill and vent valve opening after. This process repeats until all the tanks are refilled. The resupply vehicle would then detach and normal operations would resume.

Refueling Station

A possible long term refueling solution would be an orbital refueling station. Bulk amounts of xenon propellant can be launched to LEO where it can be docked with a station that then offloads the tank. The empty launch tank then returns to earth and the tug can move to dock with the station where it can refuel. This refueling station could also serve as a docking hub for multiple space-tugs. If Argo performs well, ~~then~~ this would be feasible and allows for multiple missions at one time. This proposed facility could be similar to an unmanned

*you could use remote robotics
to service / upgrade, on-orbit*

ISS. If the station becomes manned, then diagnostics and if needed, repairing and retrofitting operations could be performed further increasing the lifespan of the space tug.

Future

Argo is simply a tug platform that can have many uses beyond what has been described. [There is no way we can come up with every use] *Argo is flexible & capable enough to enable new applications in the New Space economy* (*try to be more specific*) As mentioned in the refueling section of the document, a possibility for a space station is not out of the question. Though many years of research and development would have to occur to get something like that off the ground, the idea is still there. Argo is designed to be modular and retrofittable. If a refueling station is able to exist then perhaps something like the below picture from *2001: A Space Odyssey* is not too far out of the picture.

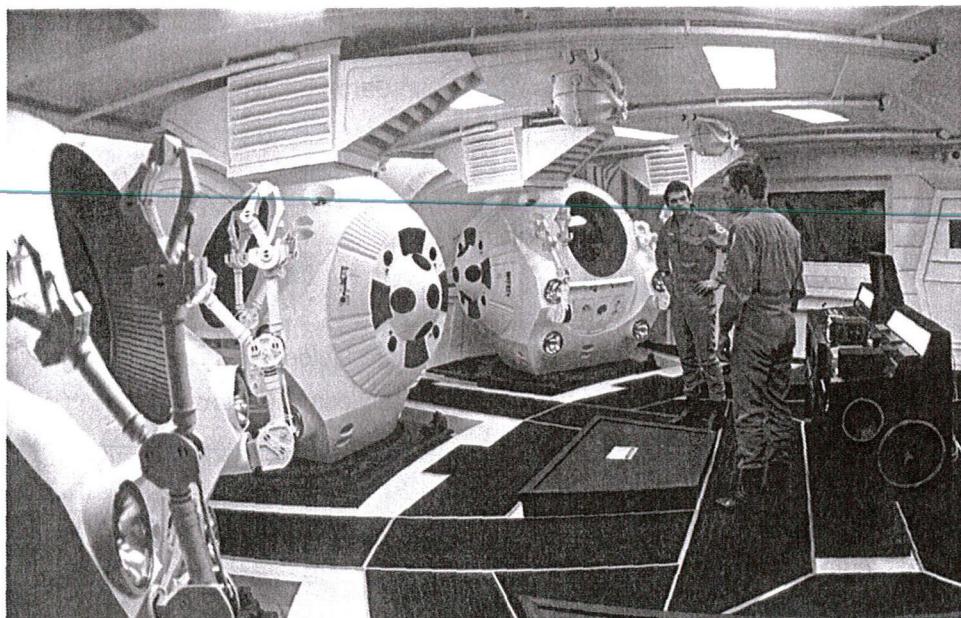


Figure 23: David Newman (Kier Duella) and Frank Poole (Gary Lockwood) in the cargo bay of *Discovery One*. Copyright 1968 ,2001 by Turner Entertainment Company

Obviously this is well down the road but it is within the realm of possibility and not necessarily representative of what would happen. The space-tugs would most likely be externally docked with repair-men/astronauts doing EVAs perform maintenance rather than an internal cargo bay. With Argo, there are many there are many possibilities.

Sources

Business:

"In-Orbit Servicing Market Opportunity Exceeds \$3 Billion." GlobeNewswire News Room, GlobeNewswire, 30 Jan. 2018, globenewswire.com/news-release/2018/01/30/1314007/0/en/In-Orbit-Servicing-Market-Opportunity-Exceeds-3-Billion.html.

Power:

Komerath, Dessanti. "Brayton Cycle Conversion For Space Solar Power." Georgia Institute of Technology, http://adl.gatech.edu/research/spg/papers/InCA_AIAAJPP.pdf

Mason, Lee. "A Comparison of Brayton and Stirling Space Nuclear Power Systems for Power Levels from 1 Kilowatt to 10 Megawatts," NASA.gov, <https://ntrs.nasa.gov/search.jsp?R=20010016863> 2018-04-04T03:14:24+00:00Z

Mason, Shaltens, Dolce, Cataldo. "Status of Brayton Cycle Power Conversion Development at NASA GRC," NASA.gov, <https://ntrs.nasa.gov/search.jsp?R=20020038204> 2018-04-04T03:13:55+00:00Z

"Multi-Mission Radioisotope Thermoelectric Generator (MMRTG)," NASA.gov, https://mars.nasa.gov/msl/files/mep/MMRTG_FactSheet_update_10-2-13.pdf

Structures:

Explorations, Space. "Falcon 9 Launch Vehicle, Payload Users Guide, Revision 2." [www.spacex.com](http://www.spacex.com/sites/spacex/files/falcon_9_users_guide_rev_2.0.pdf), 21 Oct. 2015, http://www.spacex.com/sites/spacex/files/falcon_9_users_guide_rev_2.0.pdf

Timet. "Titanium - Comparison of Properties with Other Metals." AZoM.com, 1 Aug. 2017, www.azom.com/article.aspx?ArticleID=1298.

Ray, David M, et al. "High Pressure Composite Overwrapped Pressure Vessel (COPV) Development Tests at Cryogenic Temperatures." NASA, NASA, 1 Jan. 2008, ntrs.nasa.gov/search.jsp?R=20080009730.

Propulsion :

Dachwald, "Low-Thrust Trajectory Optimization and Interplanetary Mission Analysis Using Evolutionary Neurocontrol," Deutscher Luft- und Raumfahrtkongress, 2004.

"Dual-Stage Gridded Ion Thruster (DS4G)," Advanced Concepts Team, ESA.int, http://www.esa.int/gsp/ACT/pro/projects/ds4g_overview.html

Folta, Dichmann, Clark, Haapala, and Howell, "LunarCube Transfer Trajectory Options," 4th International Workshop on LunarCubes, 2014.

Garcia, Roberto. "Asteroid Robotic Redirect Mission (ARRM) Solar Electric Propulsion (SEP) Other Trades Study (OTS)," NASA.gov,
<https://www.nasa.gov/sites/default/files/files/Other-Trades-Study-Garcia-TAGGED.pdf>

Hall, Scott James, "Characterization of a 100-kW Class Nested-Channel Hall Thruster," University of Michigan, PhD Dissertation, 2017.

Herman, Albert, "Optima, Low-Thrust, Earth-Moon Transfer," *Journal of Guidance, Control, And Dynamics*, Vol 21, No 1, January-February 1998.

Stansbury, Sarah, "Low Thrust Transfer to GEO: Comparison of Electric and Chemical Propulsion," CCAR, University of Colorado Boulder, 2009.
http://ccar.colorado.edu/asen5050/projects/projects_2009/stansbury/

Propellant feed:

Barbaritis, Joseph K, and Paul T King. "XENON FEED SYSTEM PROGRESS." DTIC, AIAA, 9 July 2006, www.dtic.mil/cgi-bin/GetTRDoc?Location=U2&docname=GetTRDoc.pdf&docid=a456850.pdf.

Bushway, Edward M, et al. "A Xenon Flowrate Controller for Hall Current Thruster Applications." SpaceGrant, IEPC, 2001,
erps.spacegrant.org/uploads/images/images/iepc_articledownload_1988-2007/2001index/2002iepc/papers/t14/315_1.pdf.

Bushway, Edward D, et al. "NSTAR Ion Engine Xenon Feed System: Introduction to System Design and Development." SpaceGrant,
erps.spacegrant.org/uploads/images/images/iepc_articledownload_1988-2007/1997index/7044.pdf.

Goebel, Dan M, and Ira Katz. *Fundamentals of Electric Propulsion: Ion and Hall Thrusters*. Wiley, 2008.
https://descanso.jpl.nasa.gov/SciTechBook/series1/Goebel_cmprsd_opt.pdf

Kim, Younho, et al. "Development of Xenon Feed System for a 300-W Hall-Thruster ." SpaceGarnt, IEPC, 20 Sept. 2009,
erps.spacegrant.org/uploads/images/images/iepc_articledownload_1988-2007/2009index/IEP-C-2009-061.pdf.

Patterson, Michael J, and Scott W Benson. "NEXT Ion Propulsion System Development Status and Performance ." *AIAA*, AIAA, 8 July 2007, www.grc.nasa.gov/WWW/ion/pdfdocs/AIAA-2007-5199.pdf.

Pehrson, David M. "Continuing Development of the Proportional Flow Control Valve (PFCV) for Electric Propulsion Systems ." *NASA*, NASA, 17 Sept. 2007, www.erps.spacegrant.org/uploads/images/images/iepc_articledownload_1988-2007/2007index/IEPC-2007-346.pdf.

Ray, David M, et al. "High Pressure Composite Overwrapped Pressure Vessel (COPV) Development Tests at Cryogenic Temperatures." *NASA*, NASA, 1 Jan. 2008, ntrs.nasa.gov/search.jsp?R=20080009730.

Starling, Dan A. "Propellant Feed Control for Ion Engines." *Naval Postgraduate School*, 1996.

Theskin, J.C., et al. "Composite Overwrap Pressure Vessels: Mechanics and Stress Rupture Lifing Philosophy." *NASA*, NASA, 23 Apr. 2007, ntrs.nasa.gov/search.jsp?R=20070022369.

Electronics:

Architectures of Onboard Data Systems. (n.d.). Retrieved from http://www.esa.int/Our_Activities/Space_Engineering_Technology/Onboard_Computer_and_Data_Handling/Architectures_of_Onboard_Data_Systems

Bechtel, R. (2013). Multi-Mission Radioisotope Thermoelectric Generator (MMRTG). *NASA Facts*. Retrieved April 11, 2018, from https://mars.nasa.gov/msl/files/mep/MMRTG_FactSheet_update_10-2-13.pdf.

High Data Rate S-Band Transmitter. (n.d.). Retrieved from <https://www.isispace.nl/product/isis-txs-s-band-transmitter/>

Huber, F. (n.d.). FPGA based On-Board Computer System for the "Flying Laptop" Micro-Satellite. Retrieved from <https://pdfs.semanticscholar.org/17e4/d734e6a914b50ddbd788dbeca01b907ad7c9.pdf>

Komerath, N. (n.d.). Brayton Cycle Conversion For Space Solar Power. *American Institute of Aeronautics and Astronautics*. Retrieved April 11, 2018.

Mason, L. S., Shaltens, R. K., Dolce, J. L., & Cataldo, R. L. (2002). Status of Brayton Cycle Power Conversion Development at NASA GRC. *NASA Technical Reports*

Server. Retrieved April 11, 2018, from
<https://ntrs.nasa.gov/search.jsp?R=20020038204>.

Mason, L. S. (2001). A Comparison of Brayton and Stirling Space Nuclear Power Systems for Power Levels from 1 Kilowatt to 10 Megawatts. *NASA, Glenn Research Center, Cleveland, Ohio*. Retrieved April 11, 2018, from
<https://ntrs.nasa.gov/search.jsp?R=20010016863>.

On board computer. (n.d.). Retrieved from
<https://www.cubesatshop.com/product/on-board-computer/>

Rao, V., & Pal, S. (2009, April). High Bit Rate Data Transmitting System for Remote Sensing Satellites. Retrieved April 11, 2018, from
<https://pdfs.semanticscholar.org/c31f/890c507bd8c17abf6c3954cc600c67ebd856.pdf>

Indian Space Research Organisation

S Band Filters. (n.d.). Retrieved from
<https://www.southwestantennas.com/products/filter-modules-diplexers-triplexers/s-band-filters>

Safe affordable fission engine. (2018, April 10). Retrieved from
https://en.wikipedia.org/wiki/Safe_affordable_fission_engine

