


PROCESSOR / RESET

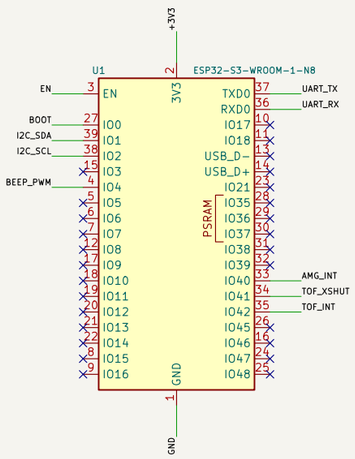


TIME OF FLIGHT – +Z optical axis




THERMAL ARRAY – +Z optical axis




RESET / BOOT BIAS




I2C – 100 kHz initial bring-up

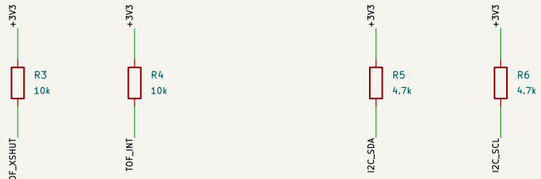





POWER / BYPASS

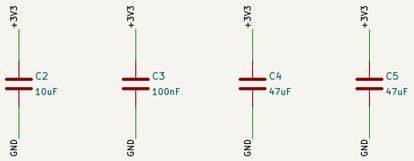

TOF LOCAL DECOUPLING




AMG INTERNAL REGULATOR BYPASS

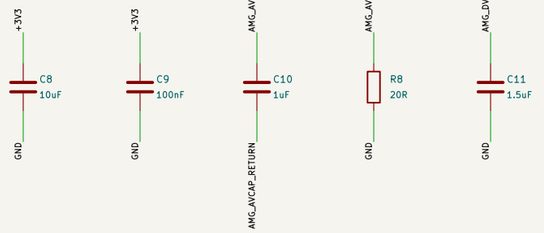


BEEPER – PWM approximately 4 kHz



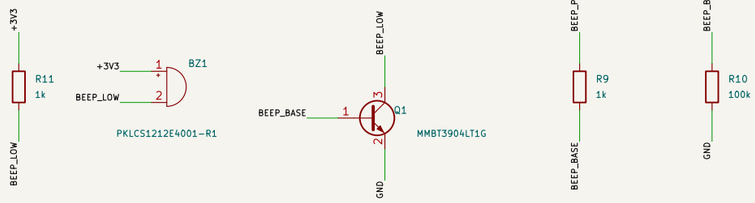



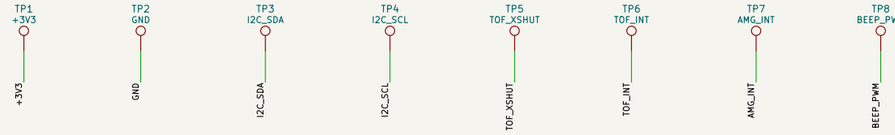

SERVICE PADS / TEST ACCESS

3.3 V REGULATED INPUT ONLY; >=1 A transient source. NO 5 V.

P1: mounting / enclosure / host protocol remain provisional. No external I2C cable is designed.

AMG: VPP tied VDD; AD_SELECT low -> 0x68. TOF: 7-bit 0x29, 2V8 I/O mode.

PROVISIONAL – 500 x 500 mm – mechanical/system integration unresolved

SashSense

Sheet: /

File: Firefly_pcb2.kicad_sch

Title: Firefly_pcb2 – SashSense sensor node

Size: A3	Date: 2026-10-19	**Rev: P1**
KiCad E.D.A. 10.0.5		Id: 1/1