


Indoor Designer Interactive Videoflex® 3500x2000mm

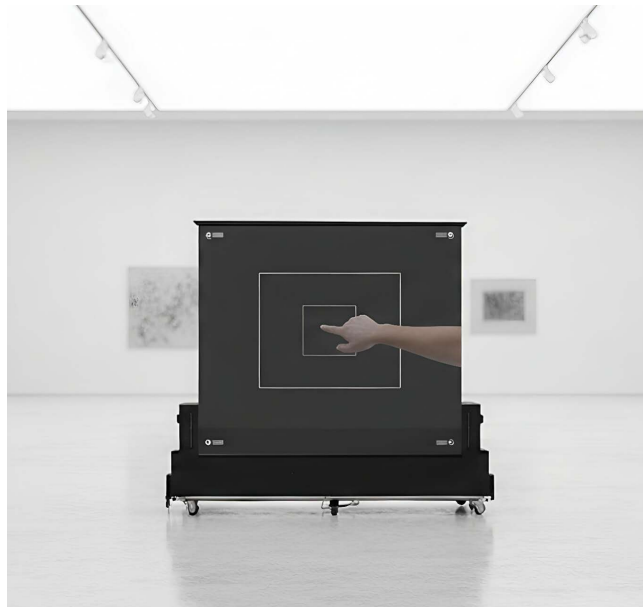

Specification

Pixel Pitch	1.9	2.6mm
Diode	SMD1212	SMD1515
Module Size (mm)	500X62.5	500X62.5
Module Resolution (pixels)	256x32	192x24
Screen Unit Size (mm)	3500x2000	3500x2000
Screen Resolution (pixels)	1792x1024	1346x768
Color Depth	12~16bit	12~16bit
Pixel Density	1,835,008	1,033,728
Refreshing Rate (Hz)	≥3,840	≥3,840
Scan Rate	1/32	1/24
Brightness	700	700
Screen Weight (kg)	87.5	87.5
Interactivity	IR Touch	IR Touch
Viewing Angle (°)	140	140
Input Voltage (V)	DC24V	DC24V
Max Power Consumption	400W/sqm	400W/sqm
Ave Power Consumption	130W/sqm	130W/sqm
Working Temperature	-20°C/+50°C (working)	-20°C/+50°C (working)
	-40°C/+60°C (storage)	-40°C/+60°C (storage)
IP Level	IP40	IP40
Humidity	10%~60% (working)	10%~60% (working)
	10%~90% (storage)	10%~90% (storage)
Lifetime(hrs)	100,000	100,000
Maintenance	Rear	Rear
Spares	5%	5%