


Outdoor Interactive 4K 32inch - 98inch								
								
Panel size	32inch	43inch	49inch	55inch	65inch	75inch	86inch	98inch
Resolution	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160
Interactivity	20 point touch	20 point touch	20 point touch	20 point touch	20 point touch	20 point touch	20 point touch	20 point touch
Panel Grade	A+	A+	A+	A+	A+	A+	A+	A+
Brightness (nit)	3000nit	3000nit	3000nit	3000nit	3000nit	3000nit	3000nit	3000nit
Contrast Ratio	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1
Viewing Angle	178°(H)/178°(V)	178°(H)/178°(V)	178°(H)/178°(V)	178°(H)/178°(V)	178°(H)/178°(V)	178°(H)/178°(V)	178°(H)/178°(V)	178°(H)/178°(V)
Lifetime (hrs)	30,000	30,000	30,000	30,000	30,000	30,000	30,000	30,000
Response time	8ms	8ms	8ms	8ms	8ms	8ms	8ms	8ms
Processor	Android 14 8+128GB	Android 14 8+128GB	Android 14 8+128GB	Android 14 8+128GB	Android 14 8+128GB	Android 14 8+128GB	Android 14 8+128GB	Android 14 8+128GB
Display	4+4mm laminated glass, IK 10 grade, Anti-reflective glass	4+4mm laminated glass, IK 10 grade, Anti-reflective glass	4+4mm laminated glass, IK 10 grade, Anti-reflective glass	4+4mm laminated glass, IK 10 grade, Anti-reflective glass	4+4mm laminated glass, IK 10 grade, Anti-reflective glass	4+4mm laminated glass, IK 10 grade, Anti-reflective glass	4+4mm laminated glass, IK 10 grade, Anti-reflective glass	4+4mm laminated glass, IK 10 grade, Anti-reflective glass
Features	Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board	Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board	Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board	Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board	Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board	Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board	Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board	Lightning arrester, air switch, timer Cooling module: Fan + Temperature control board
IP Rating	IP67/68	IP67/68	IP67/68	IP67/68	IP67/68	IP67/68	IP67/68	IP67/68
Power Supply	Switch mode 110 - 240V UL certified	Switch mode 110 - 240V UL certified	Switch mode 110 - 240V UL certified	Switch mode 110 - 240V UL certified	Switch mode 110 - 240V UL certified	Switch mode 110 - 240V UL certified	Switch mode 110 - 240V UL certified	Switch mode 110 - 240V UL certified
Voltage	Rated AC 100-240V Max 90-264V 50/60Hz	Rated AC 100-240V Max 90-264V 50/60Hz	Rated AC 100-240V Max 90-264V 50/60Hz	Rated AC 100-240V Max 90-264V 50/60Hz	Rated AC 100-240V Max 90-264V 50/60Hz	Rated AC 100-240V Max 90-264V 50/60Hz	Rated AC 100-240V Max 90-264V 50/60Hz	Rated AC 100-240V Max 90-264V 50/60Hz
Maximum power consumption (W)	280W	280W	280W	280W	280W	280W	280W	280W
Standby power consumption (W)	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W
Working temperature	-20°C~70°C	-20°C~70°C	-20°C~70°C	-20°C~70°C	-20°C~70°C	-20°C~70°C	-20°C~70°C	-20°C~70°C
Storage temperature	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C
Working humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
Ports	USB , RJ45 , RS232	USB , RJ45 , RS232	USB , RJ45 , RS232	USB , RJ45 , RS232	USB , RJ45 , RS232	USB , RJ45 , RS232	USB , RJ45 , RS232	USB , RJ45 , RS232
Case	Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional	Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional	Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional	Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional	Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional	Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional	Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional	Powder Coated White or Black/ Polished Chrome mirror finish / Matt finish optional
Case	Free standing	Free standing	Free standing	Free standing	Free standing	Free standing	Free standing	Free standing
Remote Control	Included	Included	Included	Included	Included	Included	Included	Included
Wifi Antena	Included	Included	Included	Included	Included	Included	Included	Included
IEC Cable	Included	Included	Included	Included	Included	Included	Included	Included
Gross Weight (kg)	40kg	50kg	60kg	70kg	80kg	95kg	110kg	200kg

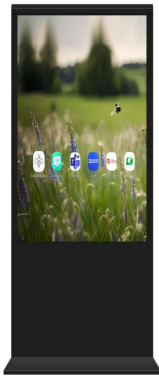