


# Indoor Designer Videoflex® 3000x2500mm

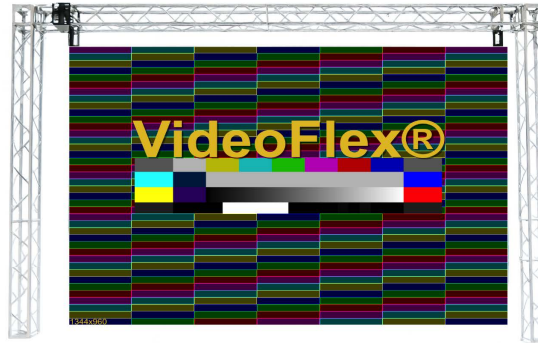

## Specification

Order Reference	IDCVFX3000x25001.251/50Bwl	IDCVFX3000x2500x251.561/40Bwl	IDCVFX3000x25001.951/32Bwl	IDCVFX3000x25002.61/24Bwl	IDCVFX3000x25003.91/16Bwl
Pixel Pitch	1.25mm	1.5625mm	1.953mm	2.604mm	3.91mm
Diode	SMD1010	SMD1010	SMD1515	SMD1515	SMD2121
Module Size (mm)	W250XH62.5	W250XH62.5	W250XH62.5	W250XH62.5	W250XH62.5
Module Resolution (pixels)	200X50	160X40	128X32	96X24	64X16
Screen Unit Size (mm)	3000x2500	3000x2500	3000x2500	3000x2500	3000x2500
Screen Resolution (pixels)	2400x2000	1920x1600	1540x1280	1153x960	768x640
Color Depth	12~16bit	12~16bit	12~16bit	12~16bit	12~16bit
Refreshing Rate (Hz)	≥3,840	≥3,840	≥3,840	≥3,840	≥3,840
Scan Rate	1/50	1/4	1/32	1/24	1/16
Brightness	>600cd/m²	>600cd/m²	>600cd/m²	>800cd/m²	>800cd/m²
Viewing Distance (meter)	≥1.2	≥1.5	≥1.9	≥2.6	≥3.9
Screen Weight (kg)	240	240	240	240	240
Viewing Angle (°)	140	140	140	140	140
Input Voltage (V)	DC24V	DC24V	DC24V	DC24V	DC24V
Max Power Consumption	510W/sqm	510W/sqm	510W/sqm	510W/sqm	510W/sqm
Ave Power Consumption	170W/sqm	170W/sqm	170W/sqm	170W/sqm	170W/sqm
Working Temperature	-20°C/+50°C (working)	-20°C/+50°C (working)	-20°C/+50°C (working)	-20°C/+50°C (working)	-20°C/+50°C (working)
	-40°C/+60°C (storage)	-40°C/+60°C (storage)	-40°C/+60°C (storage)	-40°C/+60°C (storage)	-40°C/+60°C (storage)
IP Level	IP63/IP21	IP63/IP21	IP63/IP21	IP63/IP21	IP63/IP21
Humidity	10%~60% (working)	10%~60% (working)	10%~60% (working)	10%~60% (working)	10%~60% (working)
	10%~90% (storage)	10%~90% (storage)	10%~90% (storage)	10%~90% (storage)	10%~90% (storage)
Lifetime(hrs)	100,000	100,000	100,000	100,000	100,000
Maintemance	front & rear	front & rear	front & rear	front & rear	front & rear
Spares	5%	5%	5%	5%	5%