


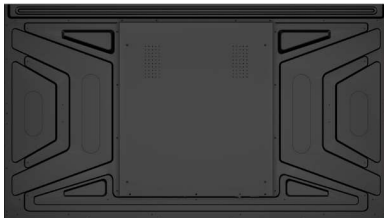

Indoor Interactive 32-55inch 4K TB					
<div></div>					
Specification					
Panel	Size	32"	43"	50"	55"
	Panel Grade	A+	A+	A+	A+
	Resolution	3840x2160	3840x2160	3840x2160	3840x2160
	Contrast Ratio	3000:1			
	Brightness	350nit			
	Reaction Time	8ms			
	Frame Tate	60Hz			
	Visual Angle	178°(H)/178°(V)			
Power	Interactivity	IR Touch 20 point			
	Life Time	30,000hrs(min.)			
	Voltage	100V~240V,50-60HZ	100V~240V,50-60HZ	100V~240V,50-60HZ	100V~240V,50-60HZ
	Average Power Consumption	118W	139W	145W	188W
	Maximum Power Consumption	280W	280W	280W	280W
Environment	Standby Power Consumption	<0.5W	<0.5W	<0.5W	<0.5W
	Working Temperature	0°C~40°C			
	IP Rating	IP30			
	Storage Temperature	-10°C~60°C			
	Storage Humidity	10%~90%RH Non-Condensing			
	Working Humidity	20%~85%RH Non-Condensing			
Input	Max Working Time(hours/day)	24 hrs			
	HDMI IN	1	1	1	1
	DVI IN	1	1	1	1
	VGA IN	1	1	1	1
	AUDIO IN	1	1	1	1
	RJ45	1	1	1	1
	USB 2.0	2	2	2	2
Output	RJ45	1	1	1	1
	AUDIO OUT	1	1	1	1
Structure	Display Dimension (mm)	745.4x429.6x58.8	977.7x566.4x58.8	1132.6x653.2x58.8	1250.1x721.4x58.8
	Net Weight (kg)	15	20	30	37
	Gross Weight (kg)	20	25	35	45
	Packing Dimension(W x H x D)	915 x 575 x 195mm	1165x705x195mm	1335x865x195mm	1335x865x195mm
	Case Material	Metal			
	Frame Color	Black Powder Coated / White Powder Coated/ Chrome			
Language	Vesa Mount with Wall Bracket	Included			
	English Afrikaans Amharic Bulgarian Catalan Chinese (Hong Kong) Chinese (PRC) Chinese (Taiwan) Croatian Czech Danish Dutch Estonian Filipino Finnish French (Canada) French (France) German Greek Hebrew Hindi Hungarian Icelandic Indonesian Italian Japanese Korean Latvian Lithuanian Malay Norwegian Polish Portuguese (Brazil) Portuguese (Portugal) Romanian Russian Serbian Slovak SlovenianSpanish (Latin America) Spanish (Spain) Swahili Swedish Thai Turkish Ukrainian Vietnamese Zulu				