


Indoor Interactive Floor 500x500mm



Specification

Pixel Pitch	2.5mm	3.9mm
Diode	SMD1415	SMD1921
Pixel Density (sqm)	160,000	65,536
Module Resolution	84 x 84	64 x 64
Module Size (mm)	250 x 250	250 x 250
Panel Size (mm)	500 x 500	500 x 500
Panel Resolution	200x200	128x128
Brightness (nit)	3000-4500	3000
Color Temperature	6500K	6500K
Horizontal Viewing Angle	≥140°	≥140°
Vertical Viewing Angle	≥120°	≥120°
Contrast Ratio	1500:1	1500:1
Bit Rate	16 bit	16 bit
Scan Rate	1/24	1/16
Refresh Rate	3840 Hz	3840 Hz
Lifetime	100,000 h	100,000 h
IP Rating	IP55/IP40	IP55/IP40
Operating Temperature	-20 °C to 50 °C	-20 °C to 50 °C
Operating Humidity	10 %- 90% RH	10 %- 90% RH
Storage Temperature	-20 °C to 60 °C	-20 °C to 60 °C
Operating Voltage	110-240V	110-240V
Maximum Power Consumption (W/sqm)	600 W/sqm	600 W/sqm
Average Power Consumption (W/sqm)	180 W/sqm	180 W/sqm
Weight (kg)	13.5kg	13.5kg

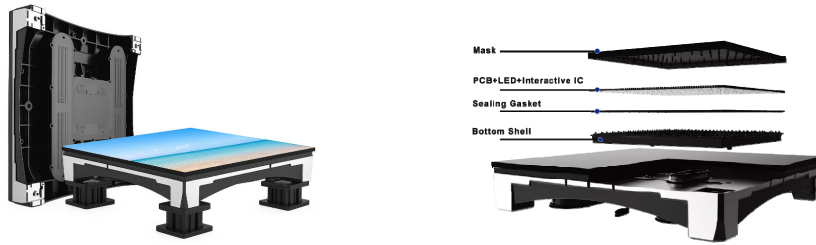