


Indoor Rigid Impact
600x337.5mm

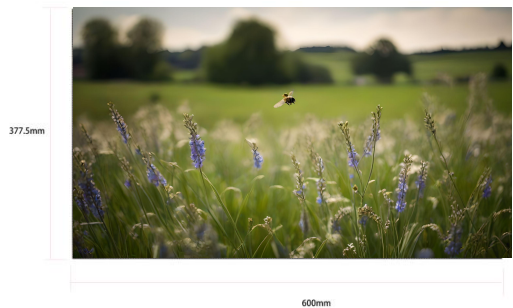

Specification

Pixel Pitch	0.9375mm	1.25mm	1.5625mm	1.875mm	2.34mm
Diode	Impact COB	Impact COB	Impact COB	Impact COB	Impact COB
Pixel Density (sqm)	1137777	640000	409600	284444	182044
Module Resolution	320X180	240X135	192X108	160X90	128X72
Module Size (mm)	300X168.75	300X168.75	300X168.75	300X168.75	320X168.75
Panel Size (mm)	600x337.5x50	600x337.5x50	600x337.5x50	600x337.5x50	600x337.5x50
Panel Resolution	640x360	480x270	384x216	320x180	256x144
Brightness (nit)	1000	1000	1000	1000	1000
Color Temperature	6500K	6500K	6500K	6500K	6500K
Horizontal Viewing Angle	≥160°	≥160°	≥160°	≥160°	≥160°
Vertical Viewing Angle	≥140°	≥140°	≥140°	≥140°	≥140°
Contrast Ratio	10000:1	10000:1	10000:1	10000:1	10000:1
Bit Rate	14 bit	14 bit	14 bit	14 bit	14 bit
Scan Rate	1/64	1/60	1/54	1/20	1/36
Refresh Rate	3840 Hz	3840 Hz	3840 Hz	3840 Hz	3840 Hz
Lifetime	100,000 h	100,000 h	100,000 h	100,000 h	100,000 h
IP Rating	IP54/30	IP54/30	IP54/30	IP54/30	IP54/30
Operating Temperature	-20 °C to 60 °C	-20 °C to 60 °C	-20 °C to 60 °C	-20 °C to 60 °C	-20 °C to 60 °C
Operating Humidity	10 %- 90% RH	10 %- 90% RH	10 %- 90% RH	10 %- 90% RH	10 %- 90% RH
Storage Temperature	-20 °C to 60 °C	-20 °C to 60 °C	-20 °C to 60 °C	-20 °C to 60 °C	-20 °C to 60 °C
Operating Voltage	110-240V	110-240V	110-240V	110-240V	110-240V
Maximum Power					
Consumption (W/sqm)	400 W/sqm	400 W/sqm	400 W/sqm	400 W/sqm	400 W/sqm
Average Power					
Consumption (W/sqm)	90 W/sqm	90 W/sqm	90 W/sqm	90 W/sqm	90 W/sqm
Weight (kg)	4.2kg	4.2kg	4.2kg	4.2kg	4.2kg