

Non-Isolated DC/DC Converter (POL)

TSRN 1 Series, 1 A

- SIP-package fits existing TO-220 footprint
- Suitable for positive & negative output circuit
- Pin compatible with LMxx linear regulators
- Built in filter capacitors
- Operation temp. range -40°C to $+85^{\circ}\text{C}$
- No heat-sink required
- Over-temperature & short circuit protection
- Wide input range up to 36 VDC
- Excellent line/load regulation
- 3-year product warranty



The new TSRN 1 series step-down switching regulators are drop-in replacement for inefficient 78xx linear regulators. A high efficiency up to 95% allows full load operation up to $+70^{\circ}\text{C}$ ($+85^{\circ}\text{C}$ with derating) ambient temperature without the need of any heat-sink or forced air cooling. The TSRN-1 switching regulators provide other significant features over linear regulators, i.e. better output accuracy ($\pm 2\%$), lower standby current of $\sim 2\text{ mA}$ and no requirement of external capacitors. They are suitable for positive or negative output circuits. The high efficiency and low standby power consumption make these regulators an ideal solution for energy sensitive applications.

Models

Order Code	Output Current max.	Input Voltage Range	Output Voltage nom.	Efficiency typ.
TSRN 1-2415	1'000 mA	4.6 - 36 VDC (12 VDC nom.)	1.5 VDC	77 % (at $V_{in\ min.}$)
TSRN 1-2418			1.8 VDC	81 % (at $V_{in\ min.}$)
TSRN 1-2425			2.5 VDC	84 % (at $V_{in\ min.}$)
TSRN 1-2433			3.3 VDC	88 % (at $V_{in\ min.}$)
TSRN 1-2450		6.5 - 36 VDC (12 VDC nom.)	5 VDC	92 % (at $V_{in\ min.}$)
TSRN 1-2465		8 - 36 VDC (12 VDC nom.)	6.5 VDC	93 % (at $V_{in\ min.}$)
TSRN 1-2490		10.5 - 36 VDC (12 VDC nom.)	9 VDC	95 % (at $V_{in\ min.}$)
TSRN 1-24120		13.5 - 36 VDC (24 VDC nom.)	12 VDC	95 % (at $V_{in\ min.}$)
TSRN 1-24150		16.5 - 36 VDC (24 VDC nom.)	15 VDC	96 % (at $V_{in\ min.}$)

Options

Suffix A	- Optional models with angular pins (see outline dimensions)
----------	--

Note - For external circuit proposal for negative output voltage, refer to application note: www.tracopower.com/overview/tsrn1

Input Specifications

Input Current	- At no load	12 Vin models: 2 mA typ. 24 Vin models: 3 mA typ.
Reflected Ripple Current		100 mAp-p typ.
Recommended Input Fuse		12 Vin models: 2'000 mA (slow blow) 24 Vin models: 2'000 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Capacitor

Output Specifications

Voltage Set Accuracy		±2% max.
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (10 - 100%)	0.2% max. 0.6% max. (1.5 Vout models, straight pin vers.) 1.2% max. (1.5 Vout models, angular pin vers.) 0.4% max. (1.8 Vout models, straight pin vers.) 1.2% max. (1.8 Vout models, angular pin vers.) 0.4% max. (other output models, both pin vers.)
Ripple and Noise (20 MHz Bandwidth)	24 Vin models: 1.5 Vout models: 1.8 Vout models: 2.5 Vout models: 3.3 Vout models: 5 Vout models: 6.5 Vout models: 9 Vout models:	75 mVp-p max. 50 mVp-p max. 50 mVp-p max. 50 mVp-p max. 50 mVp-p max. 50 mVp-p max. 50 mVp-p max. 75 mVp-p max.
Capacitive Load		470 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.015 %/K max.
Start-up Time		5 ms typ.
Start-up Overshoot Voltage		1% max.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		200% typ. of Iout max.
Transient Response	- Peak Variation - Response Time	150 mV typ. / 250 mV max. (50% Load Step) 250 µs typ. / 350 µs max. (50% Load Step)

EMC Specifications

EMI (Emissions)	- Conducted Emissions - Radiated Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter) EN 55032 class A (with external filter) EN 55032 class B (with external filter)
External filter proposal:		www.tracopower.com/tsrn1-emc-filter

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature - Case Temperature - Storage Temperature	-40°C to +85°C +100°C max. -55°C to +125°C
Power Derating	- High Temperature	Depending on model See application note: www.tracopower.com/tsrn1-cc
Over Temperature Protection Switch Off	- Protection Mode - Measurement Point	170°C typ. (Automatic recovery) Internal IC temperature
Cooling System		Natural convection (20 LFM)
Regulator Topology		Buck Converter

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Switching Frequency	240 - 360 kHz (PWM) (1.5 - 3.3 Vout models) 464 - 696 kHz (PWM) (5 - 15 Vout models)
Insulation System	Non-isolated
Reliability	- Calculated MTBF 20'000'000 h (MIL-HDBK-217F, ground benign)
Washing Process	According to Cleaning Guideline www.tracopower.com/info/cleaning.pdf
Environment	- Vibration MIL-STD-810F EN 61373 - Mechanical Shock MIL-STD-810F EN 61373 - Thermal Shock MIL-STD-810F
Housing Material	Non-conductive Plastic (UL 94 V-0 rated)
Potting Material	Silicone (UL 94 V-0 rated)
Pin Material	Copper
Pin Foundation Plating	Nickel (2 - 3 µm)
Pin Surface Plating	Tin (3 - 5 µm), matte
Housing Type	Plastic Case
Mounting Type	PCB Mount
Connection Type	THD (Through-Hole Device)
Footprint Type	SIP3
Soldering Profile	Lead-Free Wave Soldering 265°C / 10 s max.
Weight	1.9 g
Environmental Compliance	- REACH Declaration www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant - RoHS Declaration www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7(a), 7(c)-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).) - SCIP Reference Number e4ce8d4a-97c4-4c02-aa67-5cdd9298da13


Additional Information

Supporting Documents	www.tracopower.com/overview/tsrn1
Frequently Asked Questions	www.tracopower.com/glossary-faq
Glossary	www.tracopower.com/info/glossary.pdf

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Outline Dimensions


Straight pin version (Standard)

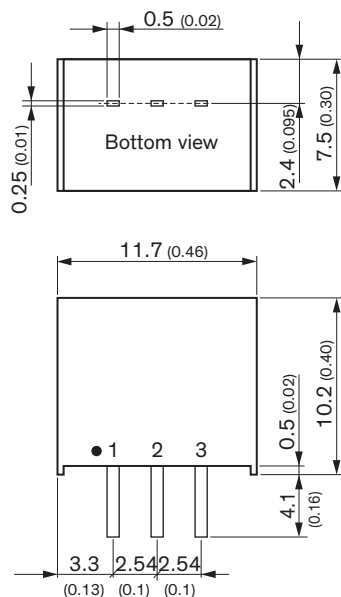

Pinout

Pin	Function
1	+Vin
2	GND
3	+Vout

Angular pin version (Suffix A)

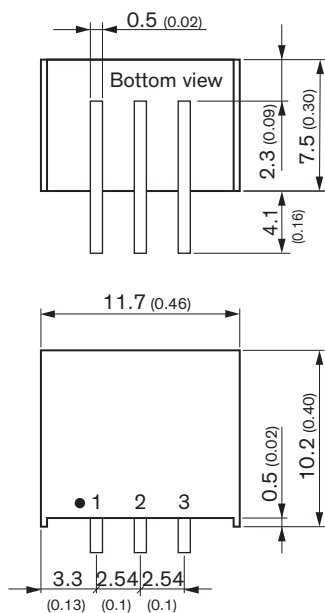

Pinout

Pin	Function
1	+Vin
2	GND
3	+Vout