



PRINT DA REDE

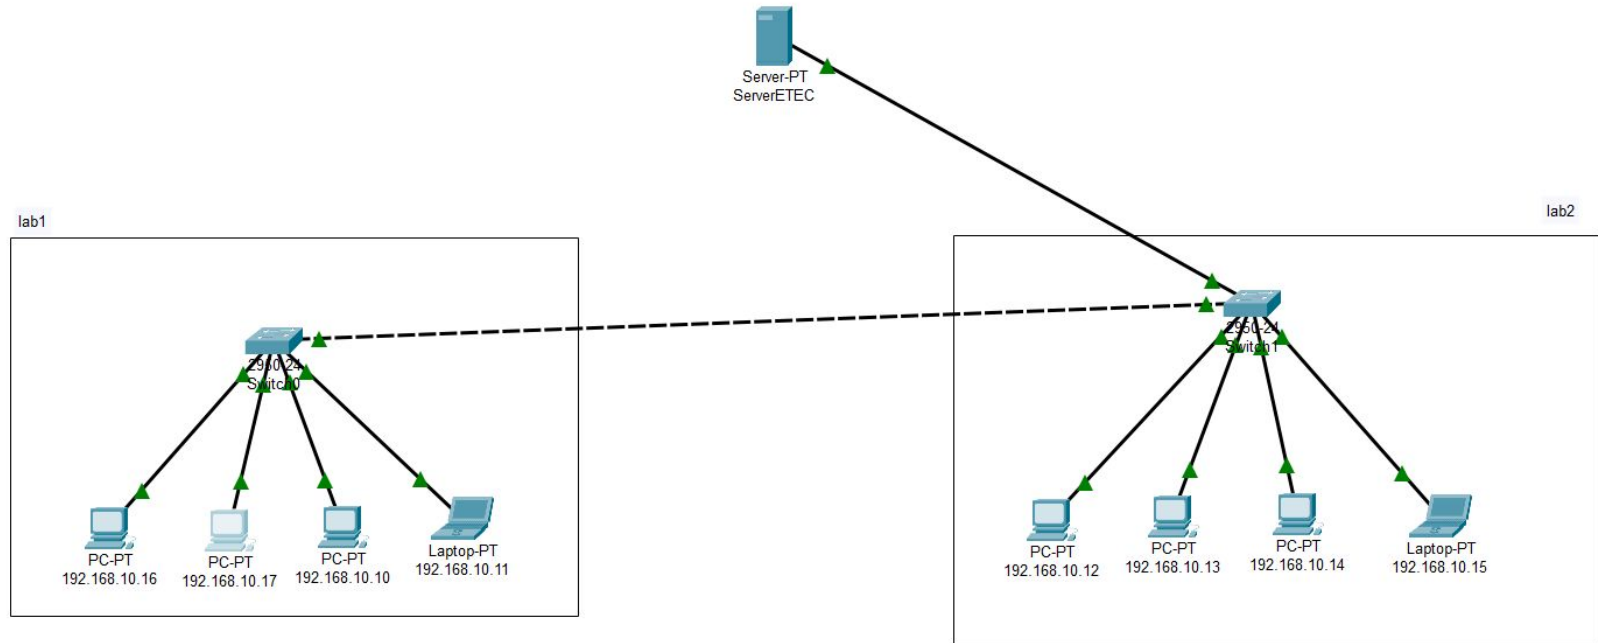

PRINT PC LAB1 PRO LAB2

lab1

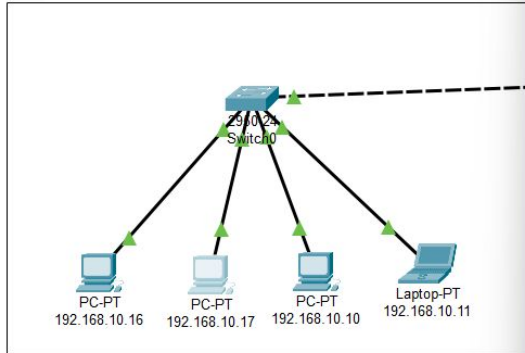

```
192.168.10.17
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.12

Pinging 192.168.10.12 with 32 bytes of data:


Reply from 192.168.10.12: bytes=32 time=1ms TTL=128
Reply from 192.168.10.12: bytes=32 time<1ms TTL=128
Reply from 192.168.10.12: bytes=32 time<1ms TTL=128
Reply from 192.168.10.12: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.12:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>|
```

PRINT PC LAB2 PRO LAB1

lab1

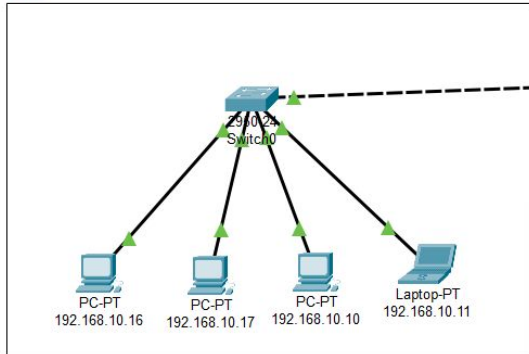

```
192.168.10.13

Physical  Config  Desktop  Programming  Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.16

Pinging 192.168.10.16 with 32 bytes of data:


Reply from 192.168.10.16: bytes=32 time<1ms TTL=128
Reply from 192.168.10.16: bytes=32 time<1ms TTL=128
Reply from 192.168.10.16: bytes=32 time<1ms TTL=128
Reply from 192.168.10.16: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.16:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

PRINT PC LAB1 PRO SERVIDOR

lab1

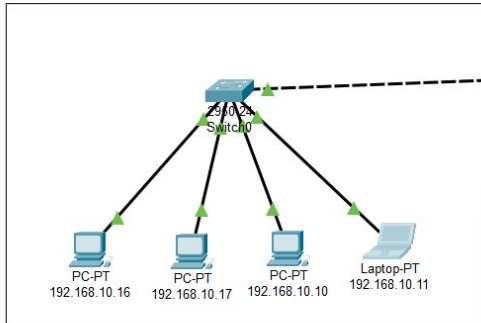

```
192.168.10.11

Physical  Config  Desktop  Programming  Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.1

Pinging 192.168.10.1 with 32 bytes of data:


Reply from 192.168.10.1: bytes=32 time<1ms TTL=128
Reply from 192.168.10.1: bytes=32 time<1ms TTL=128
Reply from 192.168.10.1: bytes=32 time=4ms TTL=128
Reply from 192.168.10.1: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 4ms, Average = 1ms

C:\>
```

PRINT PC LAB2 PRO SERVIDOR

lab1

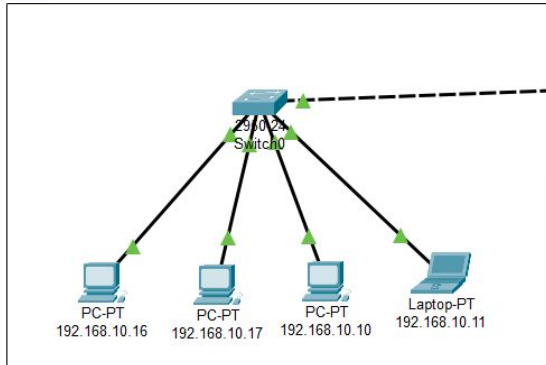

```
192.168.10.15
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.1

Pinging 192.168.10.1 with 32 bytes of data:

Reply from 192.168.10.1: bytes=32 time<1ms TTL=128
Reply from 192.168.10.1: bytes=32 time<1ms TTL=128
Reply from 192.168.10.1: bytes=32 time<1ms TTL=128
Reply from 192.168.10.1: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```