

**Build Options:**  
None

KF70 Steve Haynal

**SofterHardware**

Sheet: /Ethernet/

File: Ethernet.sch

**Title: Ethernet**

Size: USLetter Date: 2016-10-30


KiCad E.D.A. kicad 4.0.4-stable

**Rev: 2.0-beta1**

Id: 3/7


Default Versa with oscillator: Include FB12,C41,B56,B57,X2. Include R36,R38 if required by oscillator. Exclude B55,R35,R37,U5,J3,J4,C42.  
Versa with VCO: Include FB12,C41,B56,B57,X2,U5,R35,R37,B55. Exclude R36,R38,J4,J3,C42.  
Versa with crystal: Include X2 as crystal, B57 as jumper, J4,J3,C42, R38 as 15pF. Exclude FB12,C41,B56,U5,R35,R36,R37,B55.

No Versa but oscillator to AD9866: Exclude all Versa components, build for oscillator, connect WJ3 to WJ1.  
 No Versa but external clock to AD9866: Exclude all Versa components and oscillator components. Wire from WJ2 to WJ1.  
 See RF Frontend sheet for additional AD9866 clock options



Synchronized radio external clock:  
Include CL1,B58,R39.  
Exclude J23,J25.

Synchronized radio recovered clock:  
Include J23,J5.  
Adjust R39,R40. S  
Optional CL1,B58.

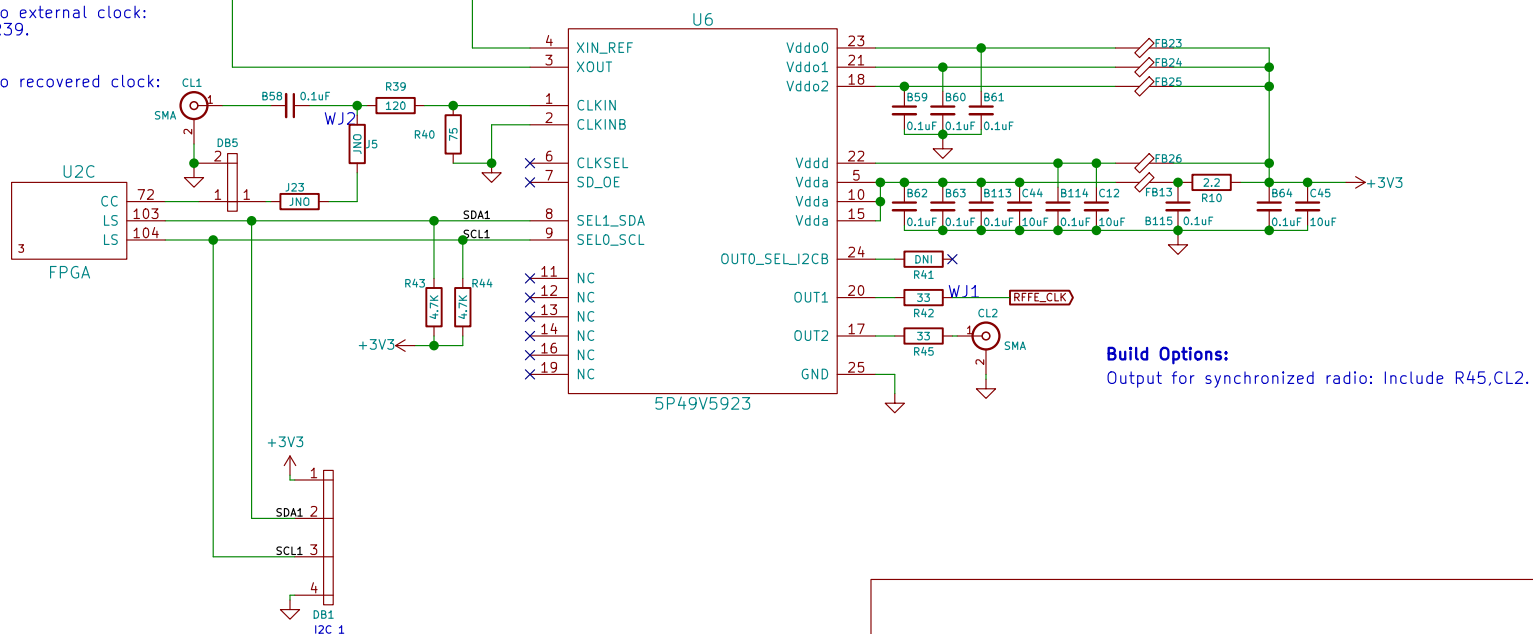

Output for synchronized radio: Include R45,CL2.

## SofterHardware


File: Clock.sch


|                 |                  |
|-----------------|------------------|
| Size: US Letter | Date: 2016-10-30 |
|-----------------|------------------|

|                |                    |
|----------------|--------------------|
| Size: USLetter | Date: 2010-1       |
| KiCad E.D.A.   | kiCad 4.0.4-stable |

Rev: 2.0-beta1

Id: 4/7

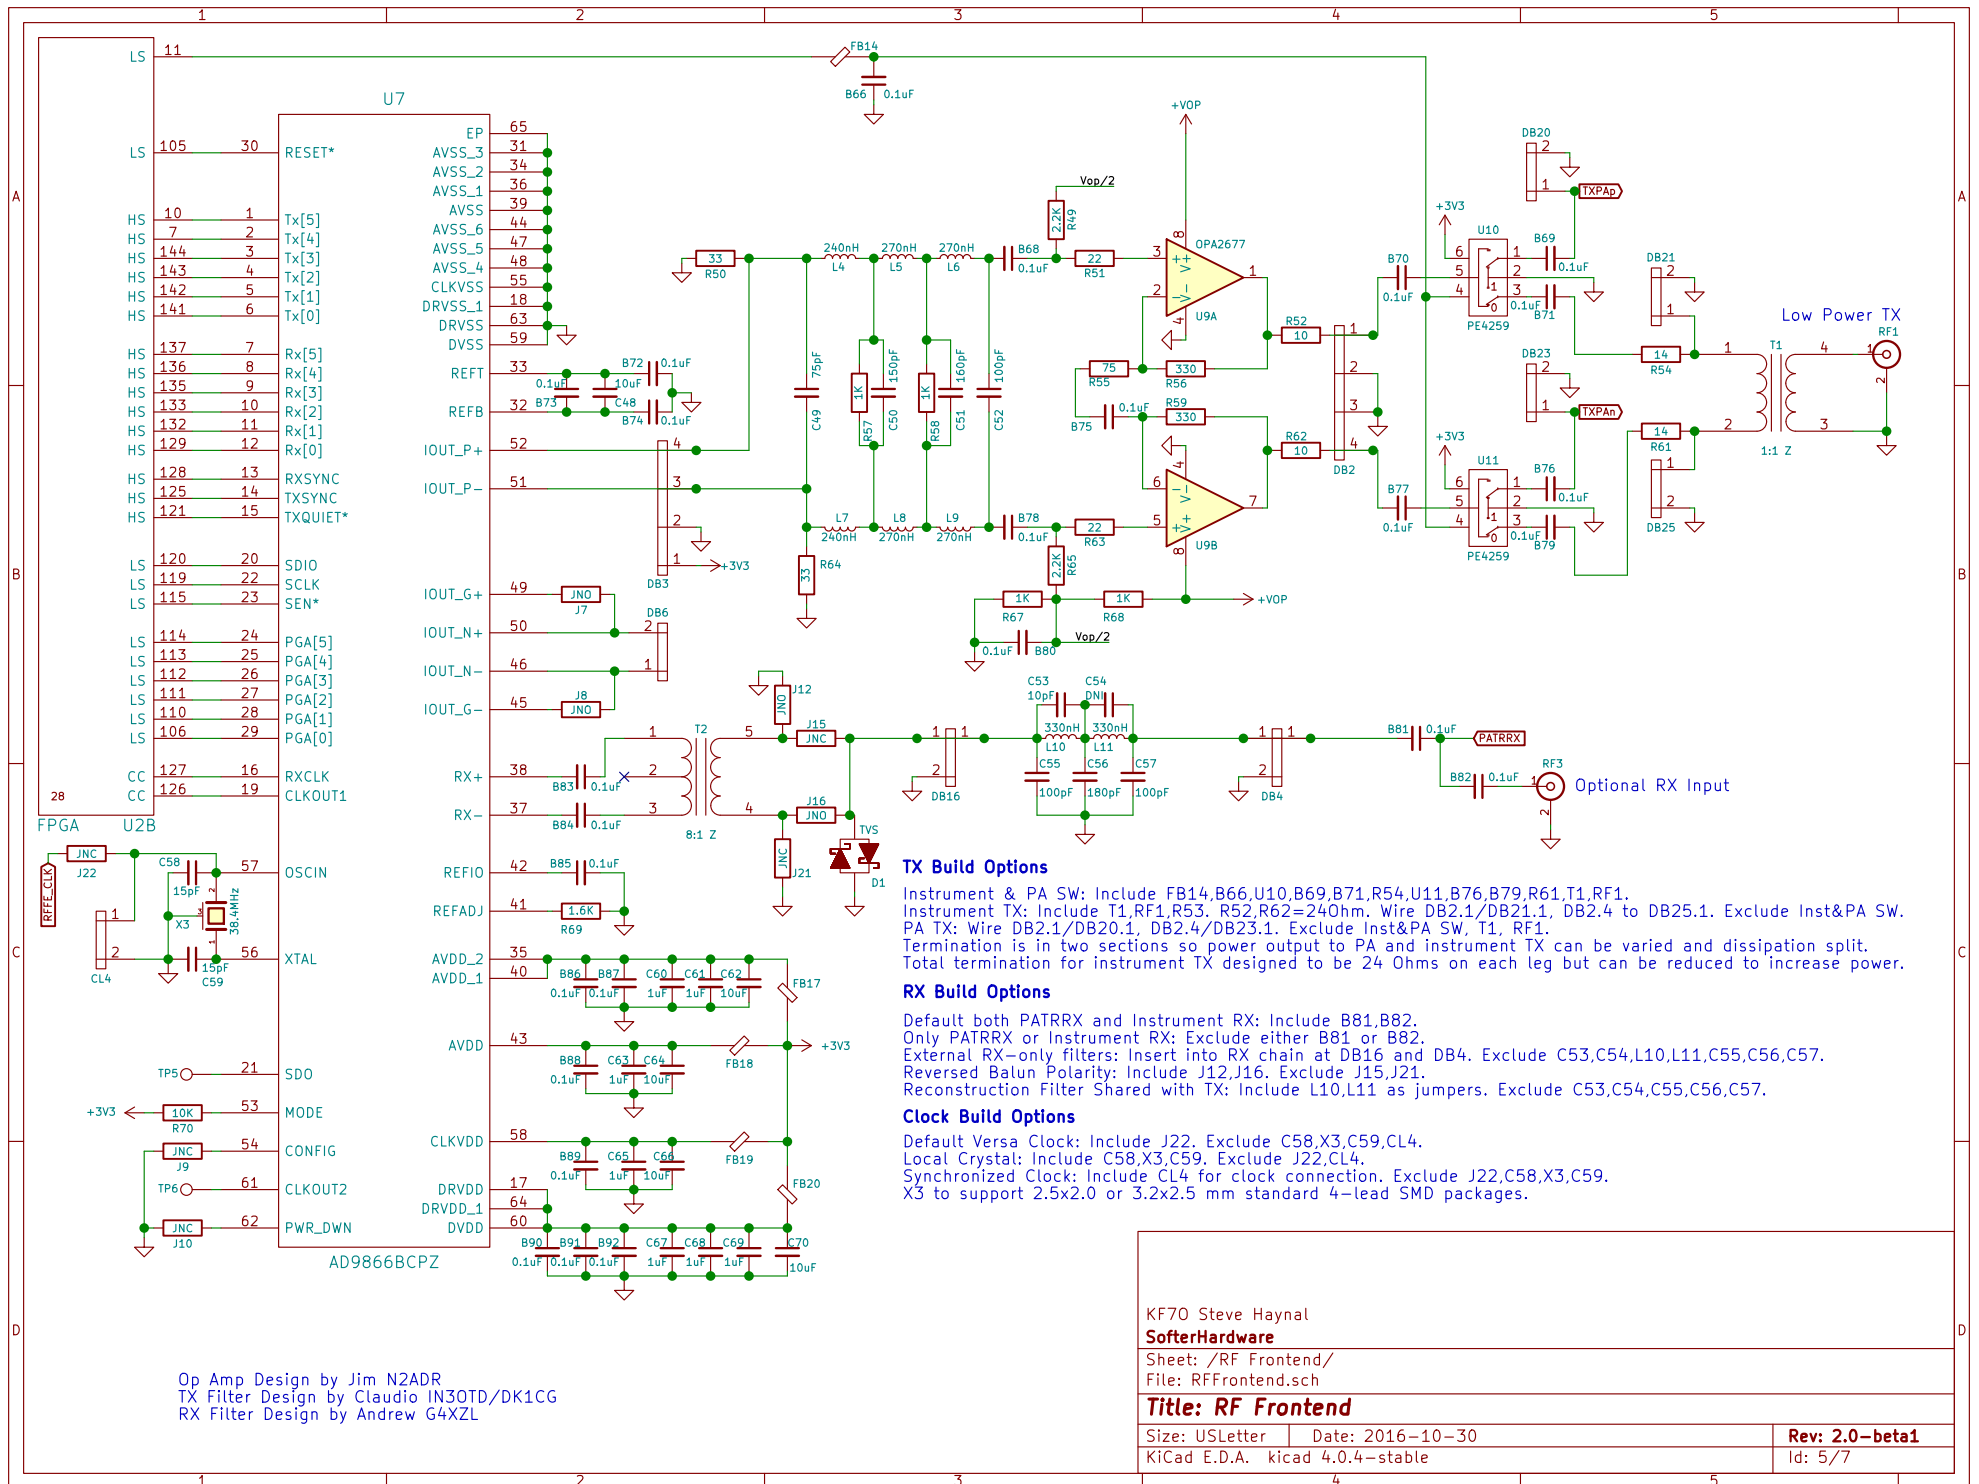

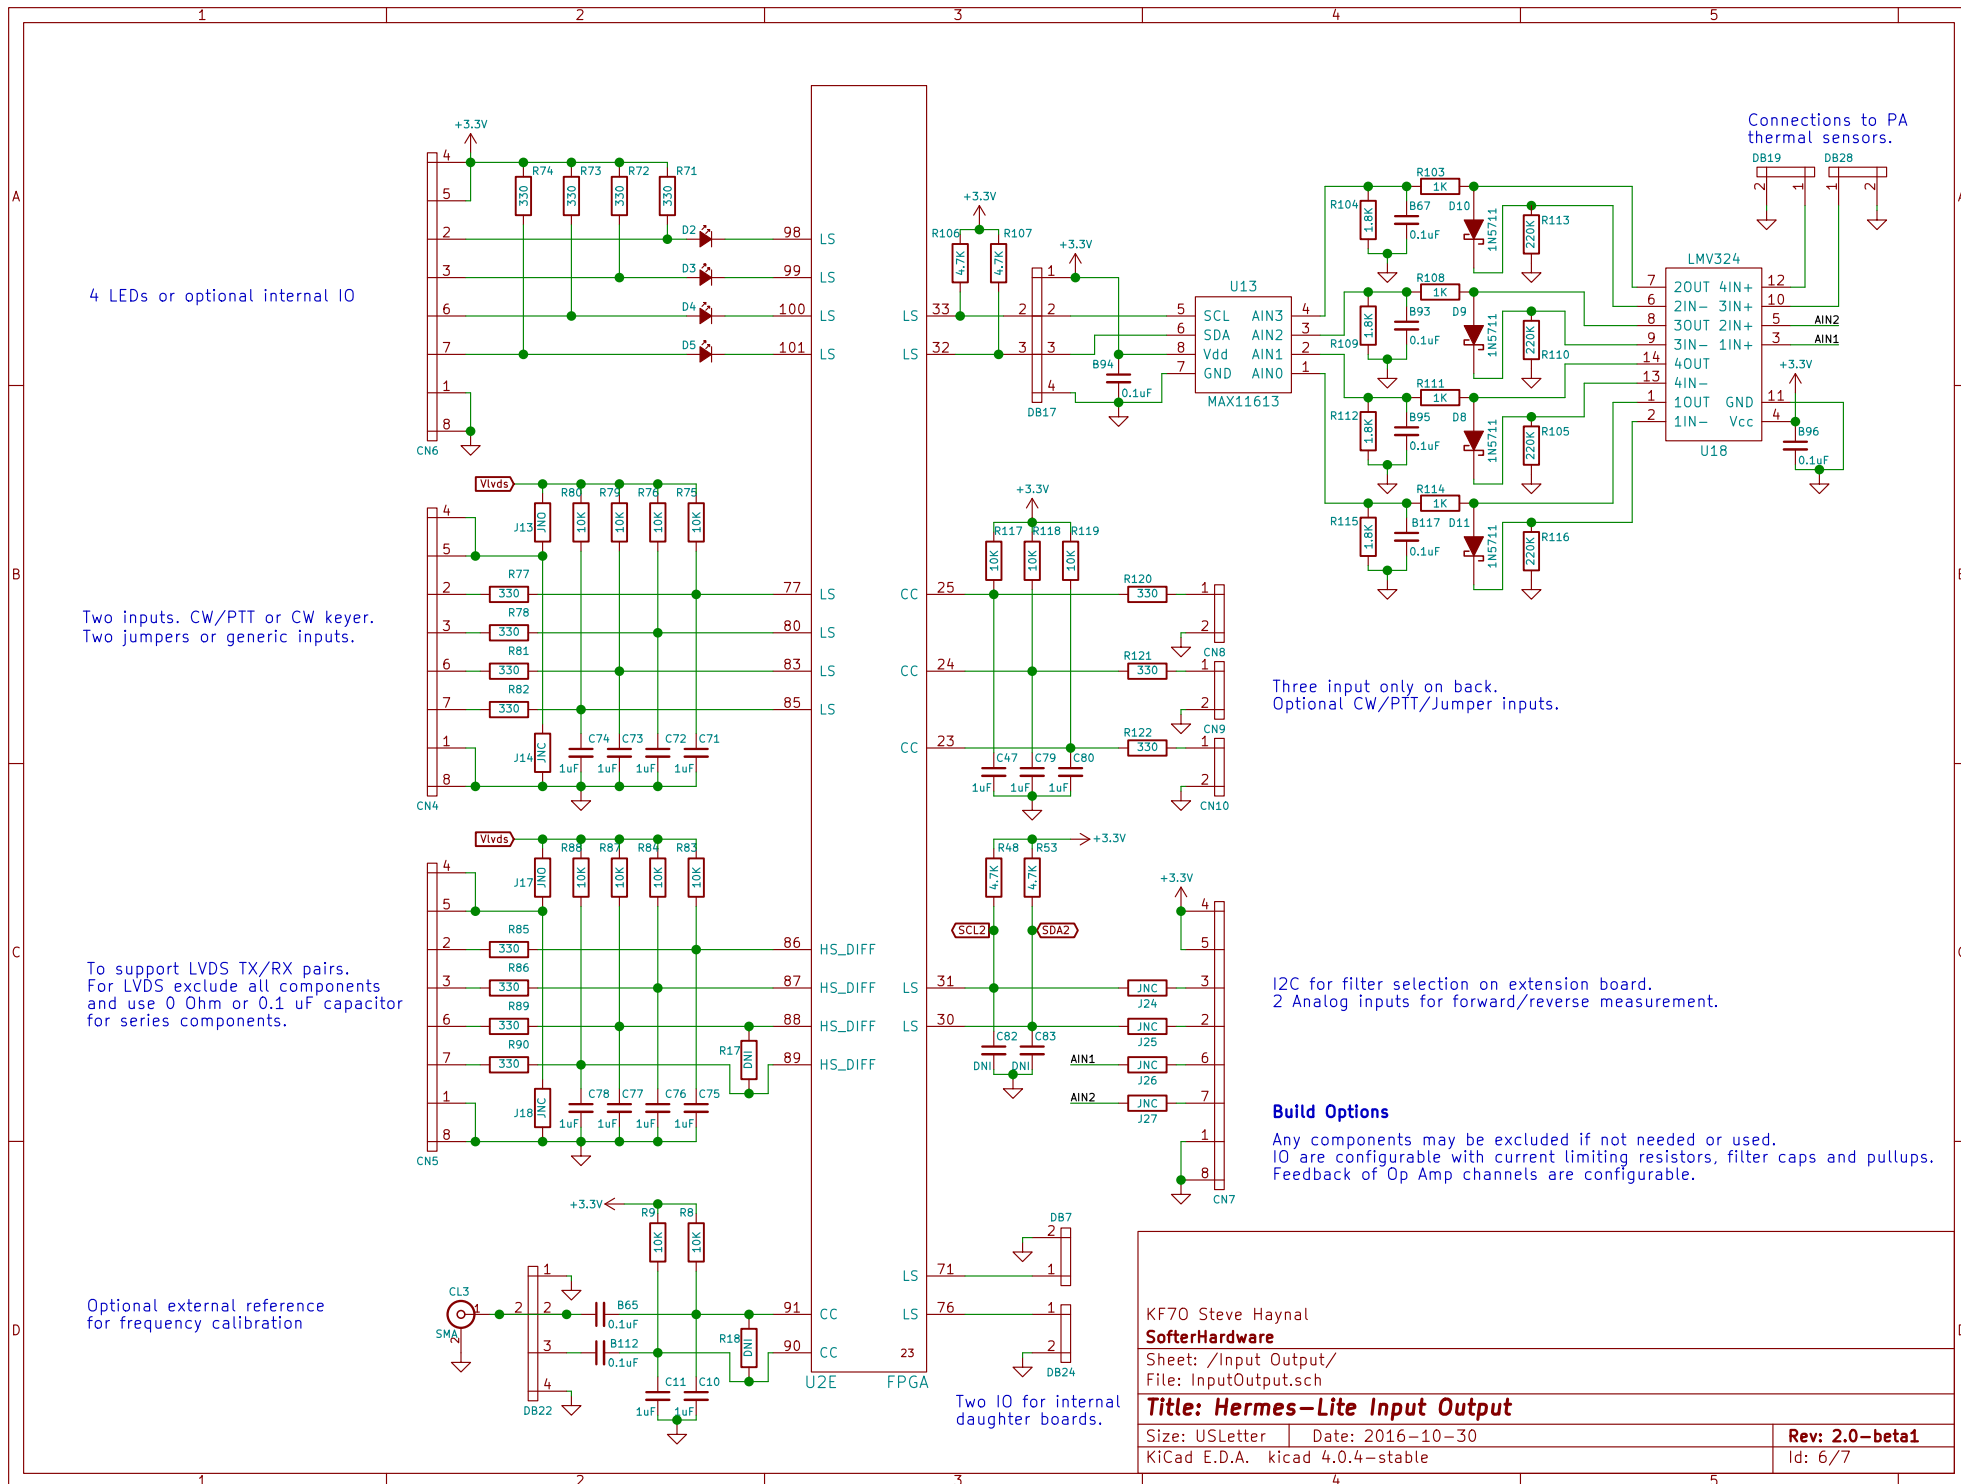

KF70 Steve Haynal

#### SofterHardware

Sheet: /Input Output/  
File: InputOutput.sch

#### Title: Hermes-Lite Input Output

Size: USLetter Date: 2016-10-30

KiCad E.D.A. kicad 4.0.4-stable

Rev: 2.0-beta1

Id: 6/7

All values are first-cut place holders. To be refined with simulation and experimentation.

#### Build Options

Any or all components may be excluded if PA is unused.

SOT-89 or TO-220 LDMOS supported on main circuit board.  
TO-220 mounts to side of enclosure.  
SOT-89 dissipates heat to PCB and side of enclosure.


Deafult build uses 2 AFT05MS003 mounted on main board, 110mA bias.

PLD-1.5 and alternate SOT-89 supported by adapter board.  
Adapter board dissipates heat to side of enclosure.

#### RD15HVF1 Test Build Option

L33,L34 = 4.7 Ohm  
R92,R99 = 500 Ohm  
T3 = BN61-202 4T Pri, 2+2T Sec  
200 mA bias

Add attenuation with R97,R98,R94,R100  
if PA is overdriven.

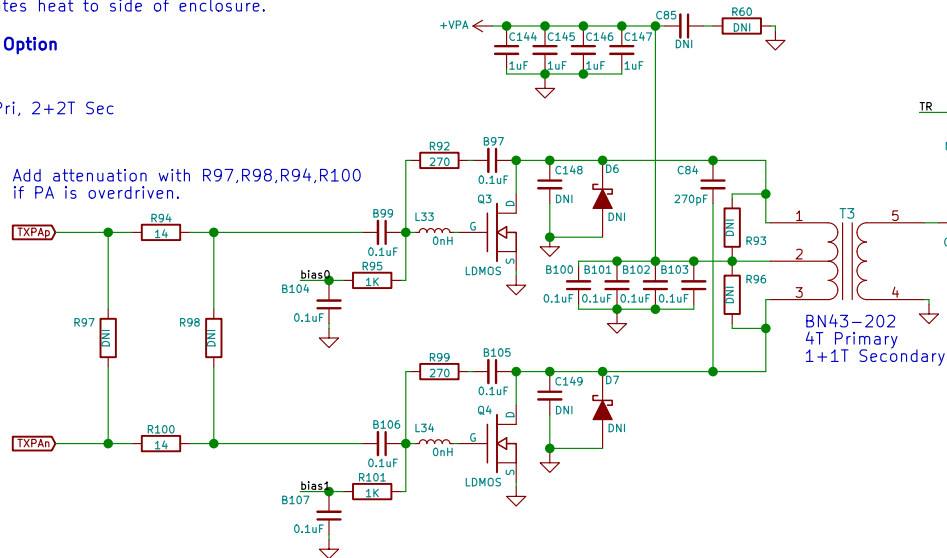

#### Build Options

Leave relay off for external filter board  
Tap RX and TX at relay through holes  
Extra grounds on relay footprint

