Reolink

Be Prepared, Be Ahead

Contents

01 About Us

02 Technologies & Experience

ReoNeura-Reolink AI 07
SolarEase™ 11
SynTrack 13
Dual-Lens Stitching 15
Dual-Lens with Smart Zoom 17
ColorX Night Vision 19
Wi-Fi 6 Compatibility 21
Intuitive Control Across Devices 23

03 Full-Range Security Solutions

Wi-Fi Cameras 27
PoE Cameras 39
4G Cameras 51
Floodlight Cameras 57
Video Doorbells 61
Data Storage Solutions 65
Accessories 69

01 - About Us

Reolink, a leader in intelligent visual technology for the home and business, was founded in 2009 by a group of engineers with a strong commitment to and passion for smarter security solutions.

Our products are now trusted by millions of users across more than 110 countries and regions worldwide. Building on this trust, we keep expanding our presence and bringing our innovations to more markets around the world. Reolink is committed to delivering advanced, reliable, and user-centric solutions that empower people to protect what matters most.

Our Mission

Safeguard and empower our users to protect what matters most.

Our Values

Technological Leadership

To pave the way, setting benchmarks through visionary technologies and unwavering commitment to excellence.

User-Centric Innovation

Our vision is guided by the needs and aspirations of our users, ensuring every solution enhances their experience and lives.

Trusted Partnership

Building enduring relationships by delivering reliable products and transparent, honest communication, earning the trust of our community.

Brand Awards

Be Prepared, Be Ahead

2009

Reolink was founded

2016

Leading in 4MP HD technology

2019

Argus 3:
Battery models achieve color night vision

2021&2022

Duo Series & TrackMix Series:
Unveils dual-lens technology

2024

Argus 4 Pro (B740X):
Battery cameras achieve ColorX night vision

Altas PT Ultra (B660):
Battery models achieve Continuous Recording

2017

Reolink Argus:
World's 1st 1080p standalone battery camera

2018

Reolink Go:
World's 1st 1080p 4G LTE battery camera

2023

Argus PT Ultra (B440):
Battery models achieve 4K resolution

2025

Elite Floodlight Series &
TrackFlex Floodlight Series:
A powerful fusion of dual-lens design, smart lighting, and ReoNeura AI.

02 - Technologies & Experience

Cutting-Edge Security Solutions for Ultimate Protection

16MP

ReoNeura™

Reolink AI

AI Security for Every Moment.

AI Video Search

Person & Object Detection

Perimeter Protection

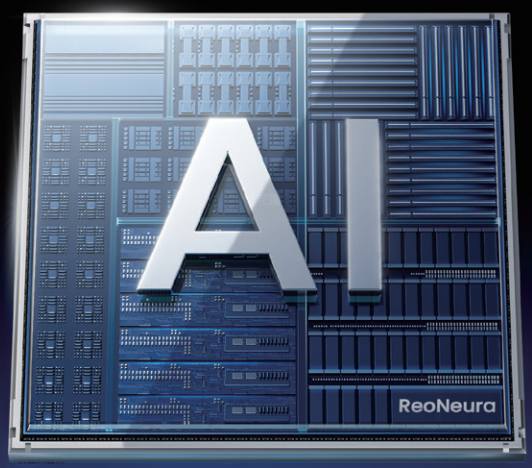

Zone Crowd Monitoring

Smart Event Detection

Heat Map

Video Captioning

People Counting

Smart Summary

Key Features of ReoNeura™

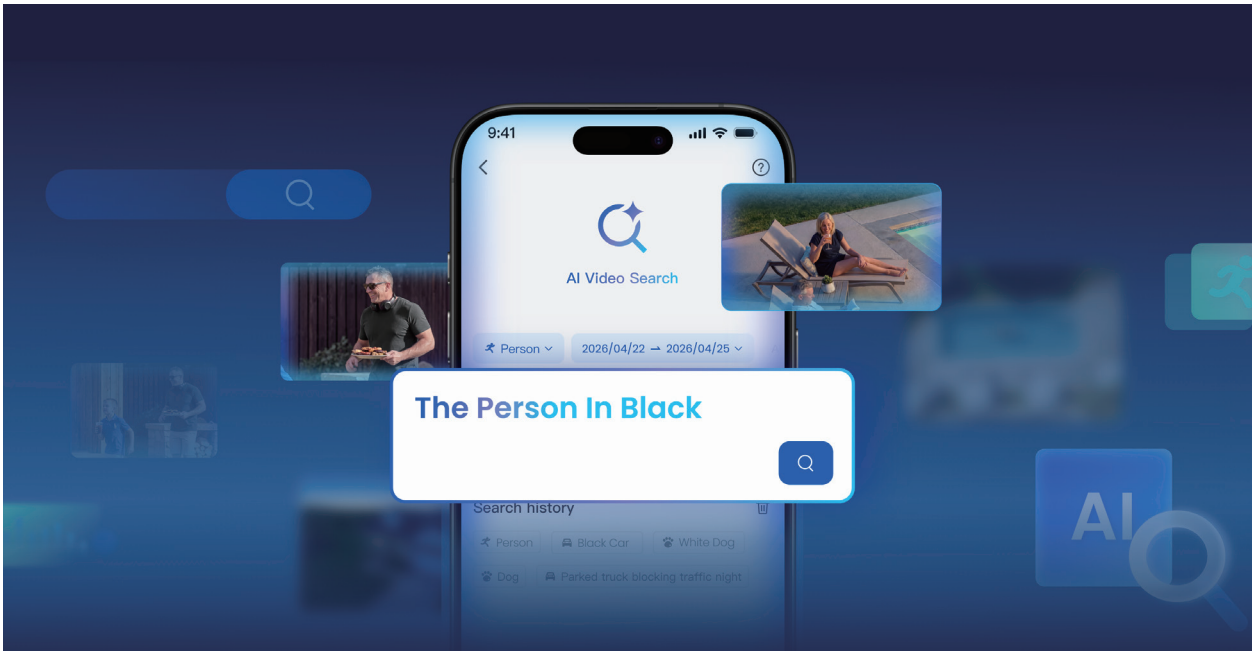

1 AI Video Search

Find What Matters, Instantly

Search through security footage as easily as you search the web. Use natural language queries – like "a person riding a bike" – to deliver high-accuracy results in seconds. No more scrubbing through hours of video; get exactly what you need, right when you need it.

2 Smart Detection

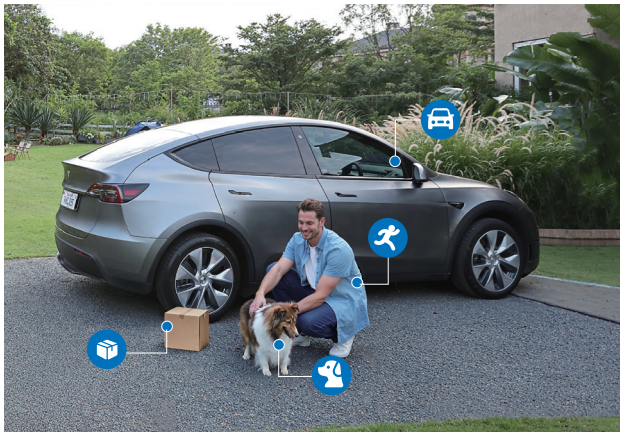

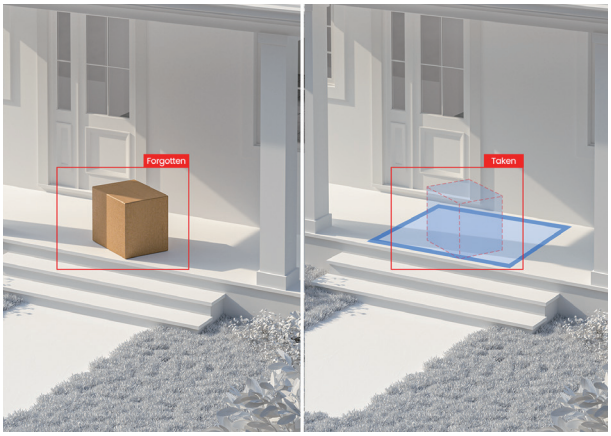

Person & Object Detection

Accurately identifies people, vehicles, animals, packages, and more. With support for custom zones and alert schedules, it filters out distractions like moving leaves or shadows, ensuring you only receive alerts that matter.

Smart Event Detection

Detects forgotten or removed objects, spotting key changes others overlook. From monitoring front-door deliveries to tracking inventory on shelves, it protects the items that matter most to you.

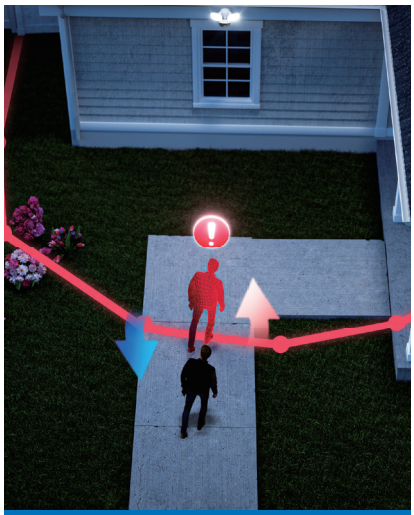

Line Crossing Alert

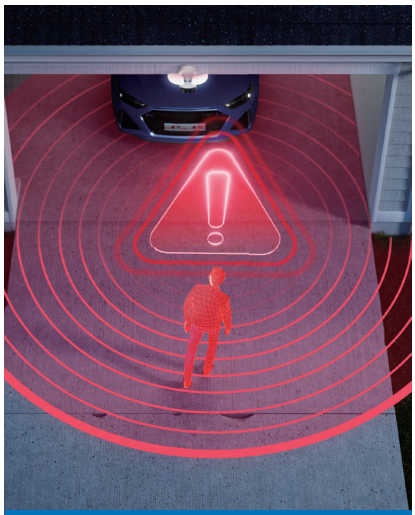

Zone Intrusion Alert

Zone Loitering Alert

3 Perimeter Protection

Precision Monitoring for Restricted Areas

Proactively detects intrusions, line crossing, and loitering. By using customizable zones and schedules combined with person and vehicle recognition, ReoNeura™ delivers relevant early warnings while significantly reducing false alarms.

4 Customer Flow Analysis

Actionable Insights from Real-World Activity

Transform foot traffic and movement into visualized data. Understand crowd levels and flow patterns to optimize space, staffing, and business operations.

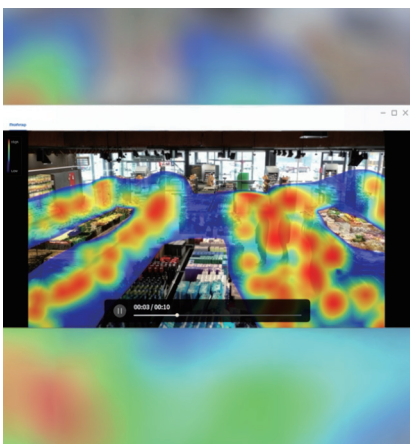

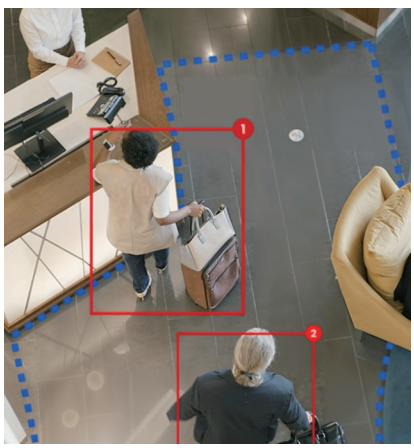

People Counting*

Tracks foot traffic through designated zones with exportable trend data.

Heat Map

Visualizes movement hotspots and reveals flow direction patterns over time

Zone Crowd Monitoring**

Monitors occupancy in key areas like queues or exits. Receive real-time alerts when capacity limits are exceeded to ease congestion.

* Available on select IP cameras and Cloud-supported models.
** Features described are based on planned functionality. Actual features may vary. Please refer to the final product for confirmation.

AI Everywhere.
Smarter Protection All Around.

ReoNeura™ delivers powerful AI across IP cameras, NVRs, and the cloud, providing the flexibility to deploy intelligence wherever you need it:
On-Camera (IPC): Detects objects and triggers instant responses by identifying key targets in real time at the edge.
On-NVR: Processes AI locally for lightning-fast performance and total data privacy – all with no subscription required.
In the Cloud: * Unlocks advanced AI capabilities without the need for hardware upgrades. Supports select product lines and offers exclusive features for a smarter, system-wide deployment.

Applications

Porch

Backyard

Driveway

Retail Store

Supermarket

Farm

*Cloud AI is available on select models with Reolink Cloud support.

SolarEase™

Efficient. Reliable. Self-Sustaining.

Reolink SolarEase™ is an advanced solar power technology designed to deliver continuous, reliable energy for security cameras. Featured in the Solar Floodlight Cam and Argus Solar Series, it harnesses sunlight with industry-leading efficiency to provide long-lasting protection without the need for manual charging.

With optimized circuit design and intelligent power management, SolarEase™ ensures your security system stays powered and ready at all times. By upgrading solar performance to a truly "Install & Forget" experience, it minimizes maintenance and maximizes uptime – even in less-than-ideal lighting conditions.

Endless Solar Power

SolarEase™ enables a continuous energy supply. It significantly upgrades charging performance, ensuring your system remains operational year-round with minimal intervention.

High Charging Efficiency

With industry-leading efficiency and MPPT (Maximum Power Point Tracking) technology, SolarEase™ optimizes energy conversion, delivering significantly faster and more stable charging performance than traditional solar panels.

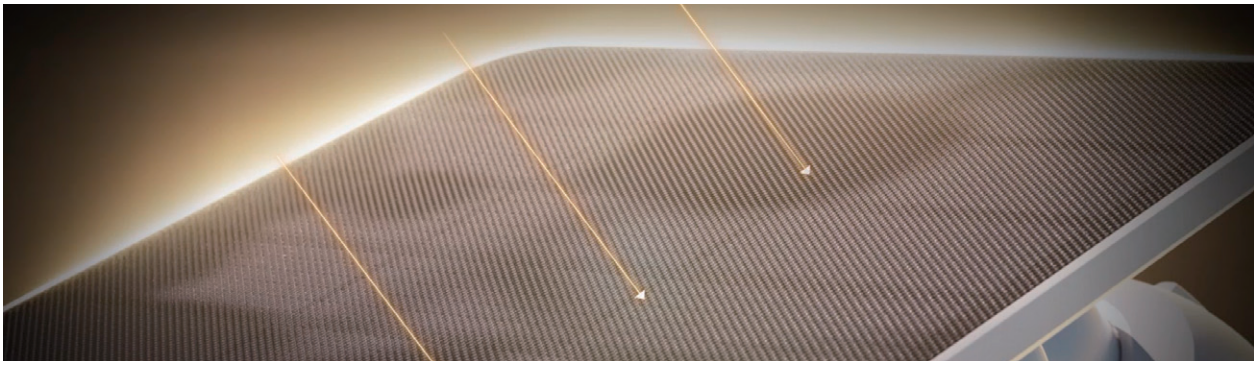

Advanced Low-Light Charging

The system is engineered to begin charging at just 1,000 lux, effectively extending usable charging hours during the early morning, late afternoon, or on heavily overcast days.

Partial Shade Resilience

Unlike standard panels that fail when obstructed, SolarEase™ continues to generate power even under partial shadows from eaves, branches, or leaves, ensuring stable operation in real-world environments.

Solar Floodlight Cam (F310B)

Argus Solar (B340S)

SyncTrack

Adaptive Surveillance for Total Situational Awareness

Reolink's SyncTrack technology redefines area monitoring by combining a fixed-lens design with a high-speed PTZ lens. While the upper view maintains a constant, wide-angle overview of your property, the lower PTZ lens actively tracks and zooms in on targets, ensuring you never have to choose between the big picture and the fine details.

Dual-View Coverage

Full Perspective with Zero Blind Spots.
Experience complete situational awareness through dual vertical views. The fixed-lens view provides an unyielding wide-angle watch, while the PTZ view delivers 360° flexibility to capture movements across the entire scene.

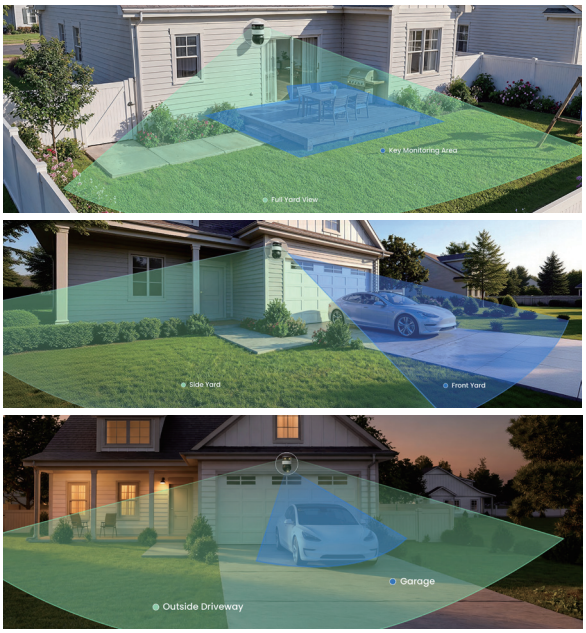

SyncTrack in Harmony

Overview-to-PTZ Sync: Lock On. Track. Zoom.
The dual views work in perfect harmony. When a target is detected in the upper fixed view, the camera instantly triggers the PTZ lens to lock on, follow the subject, and zoom in for high-definition identification.

Pinpoint with One-Tap Control

Instant Precision at Your Fingertips.
Navigate your security feed with unprecedented ease. Simply tap any area within the overview interface, and the PTZ camera will instantly rotate to that exact spot for a detailed close-up.

Simplified Deployment

One Device, Multiple Perspectives.
Lower your installation costs and complexity without compromising on security. By combining two specialized views into a single, easy-to-use unit, you get the performance of a multi-camera system with the simplicity of a single cable and mount.

.

OMVI X16 PoE (P952)

OMVI 3i PoE (P931)

OMVI 3i WiFi (W931)

OMVI 2i Ultra (B816)

Dual-Lens Stitching

Ultra-Wide Perspectives with Zero Gaps

Reolink's dual-lens stitching technology provides a seamless 180° panoramic view, offering expansive coverage that single-lens cameras simply cannot match. By merging two views into one, it eliminates blind spots and delivers a truly comprehensive security experience.

Seamless View

16MP Up to 16MP HD

180° Panorama

180° Ultra Coverage, Every Corner Secured

Utilizing an advanced dual-image stitching algorithm, Reolink combines images from two lenses to present a panoramic view free of distracting seams or disconnections. Say goodbye to blind spots and hello to total situational awareness.

Minimal Distortion

By mimicking the natural visual effect of the human eye, our dual-lens cameras overcome traditional distortion challenges. Through extensive algorithm optimization, the two lenses work in tandem to deliver a balanced, true-to-life visual output.

Up to 16MP UHD Clarity

Featuring dual 4K image sensors, the Reolink Duo 3 Series brings groundbreaking 16MP UHD clarity to your security setup. This industry-leading resolution ensures that even the smallest details are captured with crisp precision.

Duo 3 PoE
(P750)

Duo 3V PoE
(P757)

Elite WiFi
(W740)

Elite Floodlight WiFi
(F751W)

Dual-Lens with Smart Zoom

The Perfect Balance of Breadth and Detail

To meet the demand for smarter, more flexible surveillance, Reolink's Hybrid Zoom technology sets a new standard. By integrating a wide-angle lens and a telephoto lens, the system delivers a seamless 6X hybrid zoom, capturing both the big picture and the fine details simultaneously.

6X Hybrid Zoom

Seamlessly switches between wide-angle and telephoto lenses to maximize zooming capability. Effortlessly see farther and clearer, capturing rich details from a distance without sacrificing image quality.

Auto-Zoom Tracking

This technology redefines user-friendly security. The lenses automatically focus and zoom in on moving targets, keeping the subject centered and sharp at all times. This eliminates the need for manual adjustments, ensuring you always get the best view of the action.

TrackFlex WiFi
(W762)

TrackMix PoE
(P760)

TrackMix LTE
(G770)

TrackFlex Floodlight WiFi
(F850W)

ColorX Night Vision

Enhanced Color Recovery in Low Light

ColorX technology is a game-changer in low-light situations. By combining an F1.0 super aperture, an advanced 1/1.8" sensor, and specialized ISP processing, it captures color visuals in near-darkness, providing clarity without the need for bright, intrusive spotlights.

F1.0 Super Aperture

Captures 4X more light than F2.0 lenses, improving image brightness and reducing graininess in dark environments.

Advanced 1/1.8" Sensor

Features a larger surface area to increase light sensitivity and improve the accuracy of color capture.

Powerful ISP Module

Uses refined image-processing algorithms to restore details and maintain natural color balance in low-light streams.

Next-Level Night Security

4K Clarity, Even at Night

Experience the evolution of night vision with ColorX technology. Enjoy 4K UHD night color vision that rivals daylight color, ensuring unparalleled spotlight-free clarity and detail in every scene, day or night.

Advanced Color in Any Lighting

ColorX technology excels in both well-lit and low-light conditions. ColorX cameras harness extremely faint light and offer more detailed and natural color surveillance. This technology outperforms the human eye at capturing finer details in low-light conditions, even at nighttime.

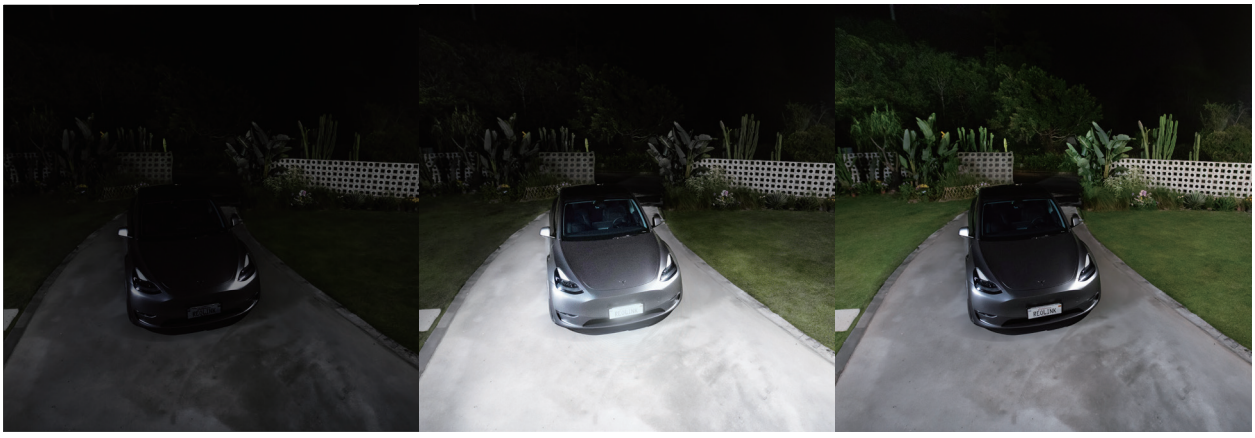

Naked Eye Perspective | Spotlight Night Vision | ColorX Night Vision

CX810 (P330X)

CX820 (P335X)

Argus 4 Pro (B740X)

Altas PT Ultra (B660)

Wi-Fi 6 Compatibility

As camera resolutions increase to 4K and 16MP, network demands grow. Reolink cameras equipped with Wi-Fi 6 provide the necessary bandwidth for consistent, high-definition wireless monitoring.

Efficiency: Higher speed to handle large video files without lag.
Responsiveness: Lower latency for faster alerts and smoother remote PTZ control.
Reliability: Better coverage and performance in homes with multiple connected devices.

Speedy, Stable & Secure

BSS Coloring Technology

Minimized Lag in Multi-user Scenario

MU-MIMO

OFDMA

WPA3 Cyber Protection

Up to **1000m²** Coverage

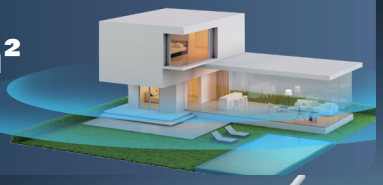

Up to **16 Devices** Connectable

Intuitive Control Across Devices

Controlling your devices has never been so easy. Connect your cameras to Google Assistant or Alexa for seamless voice control. Or stay in the loop on the go with the intuitive Reolink App/Client.

Your world, your control.

Reolink App & Client

Live View from Anywhere

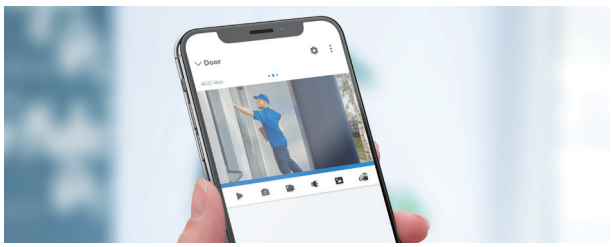

Easy & Smart Playback

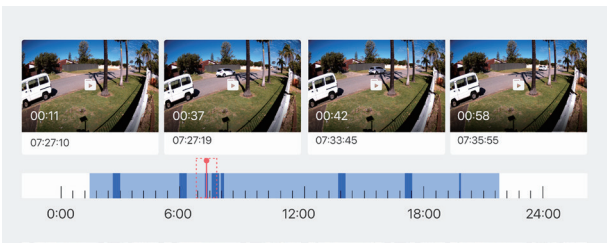

Real-Time Alerts

Privacy Mask

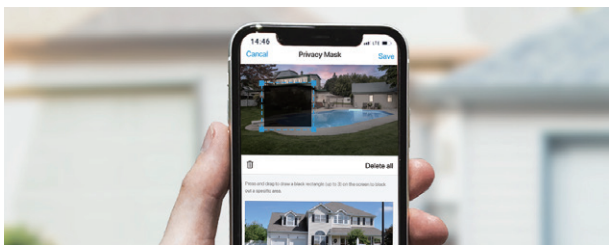

Motion Track

Motion Track condenses a target's movement – capturing up to 3 minutes of activity – into a single, static image. This provides a fast and convenient way to preview the entire sequence of an event at a glance.

Smarter Security, Seamlessly Connected

Reolink works seamlessly with leading smart home platforms including Google Home, Home Assistant, Alexa, HomeKit, and Homey, making it easy to build a smarter and more connected home security system. From live streaming to motion detection, everything works together smoothly to fit into your everyday life.

works with alexa

WORKS WITH Home Assistant

works with Google Home

works with Homey

Multi-Device Management

Effortlessly manage multiple Reolink devices through a single interface. Whether you have two cameras or a dozen, our centralized management tools ensure you stay in control of your entire property.

Centralized Control

Multi-Camera Live View

Local Storage Center

Cross-Camera Weekly Insights

*Note: Currently only compatible with selected Reolink models

03 - Full-Range Security Solutions

Complete Coverage, Customized for You

Discover Reolink's end-to-end smart security ecosystem, from Wi-Fi, PoE, and 4G cameras to floodlight cameras, video doorbells, storage solutions, and smart accessories. Designed for every environment and lifestyle, our products empower you to build a customized, reliable security system that fits your home or business perfectly.

PoE Solution
4G Solution
Wi-Fi Solution
Cameras

Wi-Fi Cameras

Wi-Fi On, Worry Off

Since launching the first 1080p Argus, Reolink's Wi-Fi cameras have redefined wireless freedom and clarity. Our battery-powered designs deliver true wire-free convenience, while plug-in models provide steady, continuous protection. Now enhanced with up to 16MP clarity, next-gen Wi-Fi 6, and Hub integration, they offer faster, smarter, and more reliable security – anywhere you need it.

Why Choose Reolink Wi-Fi Security?

Reolink Wi-Fi cameras provide high-performance security with the flexibility of a DIY setup. Equipped with Wi-Fi 6 and 2.4/5GHz dual-band technology, they ensure stable, high-speed connectivity for your home or business. Support for 24/7 recording and solar power options allows for continuous monitoring, while the wire-free design gives you the freedom to place cameras anywhere without the hassle of complex cabling.

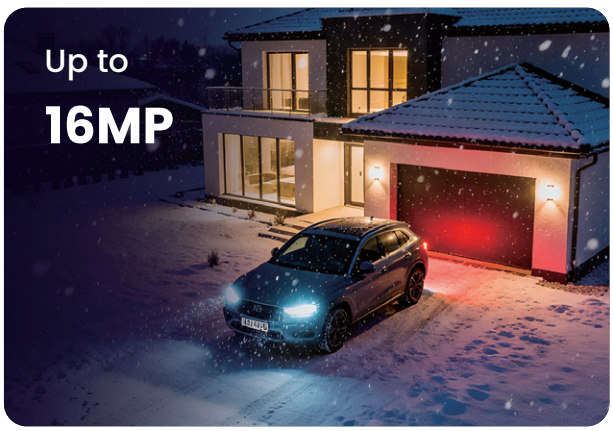

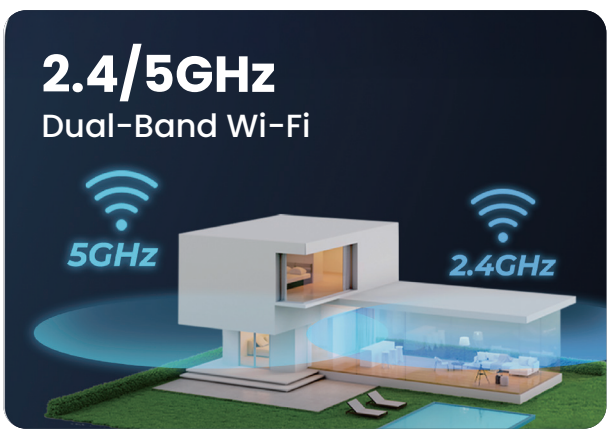

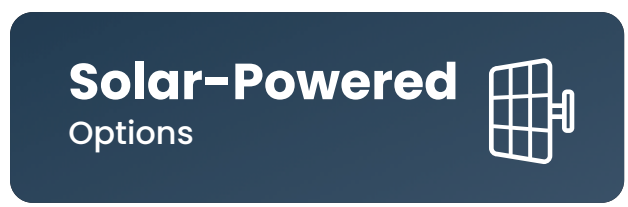

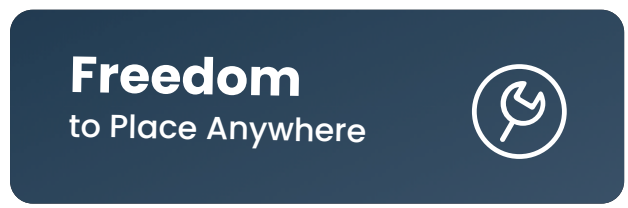

Altas PT Ultra (B660)

360° All-Around Security with Pre-Recording

10s Pre-recording

Never miss the start of any incident. Capture crucial moments for added security.

ColorX Night Vision

See vivid colors day and night, even in low light, thanks to advanced ColorX technology.

500 Days of Use

Go longer between charges with up to 500 days of motion-triggered battery life.

Auto Tracking

Automatically pan 355°, tilt 50° to follow moving people or vehicles across your property.

Dual-Band Wi-Fi 6

Enjoy faster, more stable 2.4/5GHz connections for a simple and flexible wireless setup.

4K

4K Ultra HD (8MP)

Crisp 4K resolution with a 4mm lens captures fine details like license plates.

Argus 4 Pro (B740X)

180° Blindspot-Free. 4K Color Night Vision

4K

4K 180° Blindspot-Free

Dual-lens design delivers a seamless panoramic view in vivid 4K.

Solar Powered

Get continuous power with 20 mins direct sunlight each day.

180°

180° Detection Range

Get incredible 180° motion detection range to maximize your security zone.

ColorX Night Vision

See vivid colors day and night, even in low light, thanks to advanced ColorX technology.

Dual-Band Wi-Fi 6

Enjoy faster, more stable 2.4/5GHz connections for a simple and flexible wireless setup.

Flexible Storage Options

Save locally on up to 512GB microSD, or scale up to 16TB with Reolink Home Hub solutions.

Argus PT Ultra (B440)

360° Coverage, Every Pixel in Ultra HD

4K

4K 8MP Ultra HD

Every moment captured in stunning 8MP clarity, day or night.

Next-Gen Wi-Fi 6

Get a more stable network connection with lightning-fast speed.

Detachable Solar Panel Design

Freely install the solar panel on the bracket or detach it to another spot for maximum sunshine.

Color Night Vision

Bright, full-color images even in darkness, powered by built-in spotlights.

Auto Tracking

Smartly follow the target so you never lose sight of what matters.

Smart Detection

Intelligent alerts that keep you aware of what's important, without the noise.

E1 Outdoor Pro (E560)

Smart 4K PTZ Camera with Auto Tracking

4K

4K 8MP Ultra HD

Capture every moment in superb clarity with the finest details like faces and license plates.

Next-Gen Wi-Fi 6

Get a more stable network connection with lightning-fast speed.

355° Pan & 50° Tilt

Achieve wider coverage by panning and tilting, ensuring all corners are monitored.

3X

3× Optical Zoom

See the difference up close; capture distant details with incredible clarity and precision.

Color Night Vision

Get bright and vivid images in full color, even at night.

Auto Tracking

Follow the target automatically to keep up with the action.

E Series E331

360° All-Around Security with 2K+ Clarity

3K

3K(5MP) Resolution

Equipped with a 3K(5MP) lens, ensuring every detail is captured with striking clarity, even when zoomed in.

355° Pan & 50° Tilt

Provide flexible movement in all directions, allowing you to monitor your home from anywhere.

Auto Tracking

Automatically follow moving subjects within its field of view.

Crying Detection

Trigger an alert upon detecting crying sounds, sending instant notifications to your mobile device.

2.4G/5G WiFi

Enjoy a seamless Wi-Fi connection with faster speeds and wider coverage.

Privacy Mode

Shut down the camera's view and disable sound recording without powering off the camera.

Plug-In Wi-Fi Cameras

	Pan & Tilt Cameras						Dome & Turret Cameras	
	E1 Outdoor (E540)	E1 Outdoor Pro (E560)	RLC-823S1W (W840)	TrackMix WiFi (W760)	Reolink TrackFlex WiFi (W762)	Reolink OMVI 3i WiFi (W931)	FE-W (W520)	RLC-843WA (W437)
Resolution	5MP	8MP	8MP	8MP	8MP	10MP + 8MP	6.5MP	8MP
Frame rate	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS	Max. 25 FPS	Max. 20 FPS
Field of View	Horizontal: 50° - 94° Vertical: 30° - 53°	Horizontal: 50° - 94° Vertical: 30° - 53°	Horizontal: 100° - 31° Vertical: 55° - 17°	Horizontal: 104° - 38° Vertical: 60° - 21°	Horizontal: 85° - 25° Vertical: 44° - 15°	Upper Cam Horizontal:180° Vertical: 65° Lower PT Cam Horizontal: 55° Vertical: 30°	Horizontal: 180° Vertical: 180° Diagonal: 180°	Horizontal: 105° - 36° Vertical: 55° - 17°
Smart Alarm	Motion/Person/ Vehicle/ Animal Detection	Motion/Person/ Vehicle/ Animal Detection	Motion/Person/ Vehicle/ Animal Detection	Motion/Person/ Vehicle/ Animal Detection	Motion/Person/ Vehicle/ Animal Detection	Motion/Person/ Vehicle/ Animal Detection	Motion/Person/ Vehicle/ Animal Detection	Motion/Person/ Vehicle/ Animal Detection
AI Video Search	–	–	✓	–	–	✓	–	–
Perimeter Protection	–	–	–	–	–	–	–	–
Wi-Fi Standard	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi
Pan & Tilt	Pan: 355°, Tilt: 50°	Pan: 355°, Tilt: 50°	Pan: 355°, Tilt: 90°	Pan: 355°, Tilt: 90°	Pan: 355°, Tilt: 90°	Pan: 350°, Tilt: 90°	–	–
Tracking Methods	Auto Tracking	Auto Tracking	Auto Tracking	Auto-Zoom Tracking	Auto-Zoom Tracking	Digital Zoom	–	–
Zoom	3× Optical Zoom + Digital Zoom	3× Optical Zoom + Digital Zoom	5× Optical Zoom + Digital Zoom	6× Hybrid Zoom	6× Hybrid Zoom	Auto-Framing Zoom	Digital Zoom	5× Optical Zoom+ Digital Zoom
Night Vision	Color + IR Night Vision, up to 40 ft	Color + IR Night Vision, up to 40 ft	Color + IR Night Vision, up to 200 ft	Color + IR Night Vision	Color + IR Night Vision	Color + IR Night Vision	IR Night Vision	Color + IR Night Vision, up to 100 ft
Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio
Weatherproof	IP65	IP65	IP66	IP65	IP66	IP66	Indoor Use Only	IP67
Local storage	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR

*The data on the pages above is obtained under specific test conditions. Actual use may vary. All specifications are subject to change without notice.

Plug-In Wi-Fi Cameras

Indoor Pan & Tilt Cameras

	E321	E1 Swift (E322)	E1 (E320)	E1 Pro (E330)	E331	E1 Zoom (E340)
Resolution	3MP	3MP	4MP	5MP	5MP	8MP
Power	DC power	DC power or AA batteries powered 4 Month Backup Battery Life	DC power	DC power	DC power	DC power
Frame rate	Max. 20 FPS	Max. 15 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS
Field of View	Horizontal: 77° Vertical: 41°	Horizontal: 85° Vertical: 44.2° Diagonal: 106.6°	Horizontal: 77° Vertical: 41°	Horizontal: 84° Vertical: 45°	Horizontal: 87.5° Vertical: 45.4°	Horizontal: 98° - 48° Vertical: 75° - 37°
Smart Alarm	Person/Pet/Baby Crying Detection	Person/Pet/Baby Crying Detection	Person/Pet/Baby Crying Detection	Person/Pet/Baby Crying Detection	Person/Pet/Baby Crying Detection	Person/Pet/Baby Crying Detection
Wi-Fi Standard	2.4 GHz Wi-Fi，Wi-Fi 6	2.4/5 GHz Dual-Band Wi-Fi	2.4 GHz Wi-Fi，Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi 6
Pan & Tilt	Pan: 355°, Tilt: 50°	Pan: 340°, Tilt: 50°	Pan: 355°, Tilt: 50°	Pan: 355°, Tilt: 50°	Pan: 355°, Tilt: 50°	Pan: 355°, Tilt: 50°
Tracking Methods	Auto Tracking	Auto Tracking	Auto Tracking	Auto Tracking	Auto Tracking	Auto Tracking
Zoom	Digital Zoom	Digital Zoom	Digital Zoom	Digital Zoom	Digital Zoom	3× Optical Zoom + Digital Zoom
Night Vision	IR Night Vision	IR Night Vision	IR Night Vision	IR Night Vision	IR Night Vision	IR Night Vision
Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio
Local storage	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR

*The data on the pages above is obtained under specific test conditions. Actual use may vary. All specifications are subject to change without notice.

Bullet Cameras

	Reolink Lumus (E430)	RLC-510WA (W320)	Reolink Lumus Pro (E450)	RLC-810WA (W330)	RLC-811WA (W430)	Reolink Duo 2 WiFi (W730)	Reolink Duo 3 WiFi (W750)	Reolink Elite WiFi (W740)
Resolution	4MP	5MP	8MP	8MP	8MP	8MP	16MP	8MP
Frame Rate	Max. 15 FPS	Max. 25 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS
Field of View	Horizontal: 107° Vertical: 57°	Horizontal: 80° Vertical: 48°	Horizontal: 106° Vertical: 56°	Horizontal: 87° Vertical: 44°	Horizontal: 105°-36° Vertical: 55°-17°	Horizontal: 180° Vertical: 60°	Horizontal: 180° Vertical: 55°	Horizontal: 180° Vertical: 59°
Smart Alarm	Motion/Person/ Vehicle/Animal Detection	Motion/Person/ Vehicle/Animal Detection	Motion/Person/ Vehicle/Animal Detection	Motion/Person/ Vehicle/Animal Detection	Motion/Person/ Vehicle/Animal Detection	Motion/Person/ Vehicle/Animal Detection	Motion/Person/ Vehicle/Animal Detection	Motion/Person/ Vehicle/Animal Detection
AI Video Search	–	–	–	–	–	✓	✓	✓
Perimeter Protection	–	–	–	–	–	Line Crossing Alert, Zone Intrusion Alert, Zone Loitering Alert	Line Crossing Alert, Zone Intrusion Alert, Zone Loitering Alert	Line Crossing Alert, Zone Intrusion Alert, Zone Loitering Alert
Wi-Fi Standard	2.4/5GHz Dual- Band Wi-Fi	2.4/5GHz Dual- Band Wi-Fi	2.4/5GHz Dual- Band Wi-Fi 6	2.4/5GHz Dual- Band Wi-Fi 6	2.4/5GHz Dual- Band Wi-Fi 6	2.4/5GHz Dual- Band Wi-Fi 6	2.4/5GHz Dual- Band Wi-Fi 6	2.4/5GHz Dual- Band Wi-Fi 6
Zoom	Digital Zoom	Digital Zoom	Digital Zoom	Digital Zoom	5× Optical Zoom + Digital Zoom	Digital Zoom	Digital Zoom	Digital Zoom
Night Vision	Color + IR Night Vision	Color + IR Night Vision	Color + IR Night Vision	Color + IR Night Vision	Color + IR Night Vision, up to 100 ft	Color + IR Night Vision	Color + IR Night Vision	Color + IR Night Vision
Audio	Two-Way Audio	–	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio
Weatherproof	IP65	IP67	IP65	IP67	IP67	IP66	IP67	IP66
Local Storage	- microSD Card Slot (up to 256GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub, Wi-Fi NVR, and PoE NVR

*The data on the pages above is obtained under specific test conditions. Actual use may vary. All specifications are subject to change without notice.

Battery-Powered Wi-Fi Cameras

Bullet Cameras

	Argus MagiCam (B210)	Argus Eco (B320)	Argus Solar	Reolink Altas (B630)	Argus 3 Pro (B330)	Argus Eco Ultra (B360)	Argus 3 Ultra (B350)	Argus 4 Pro (B740X)
Resolution	1080P	5MP	3MP	4MP	5MP	8MP	8MP	8MP
Battery Capacity	2 AA Lithum Batteries	4900mAh	6500mAh	20,000mAh	5200mAh	6000mAh	6000mAh	5000mAh
Battery Life	Up to 9 Months	Up to 4 Months	Up to 5 Months	Up to 18 Months	Up to 4 Months	Up to 4 Months	Up to 4 Months	Up to 70 Days
Field of View	Horizontal: 110° Vertical: 62° Diagonal: 132°	Horizontal: 88° Vertical: 50° Diagonal: 115°	Horizontal: 110 Vertical: 58° Diagonal: 132°	Horizontal: 90° Vertical: 50° Diagonal: 110°	Horizontal: 105° Vertical: 55° Diagonal: 125°	Horizontal: 105° Vertical: 55° Diagonal: 125°	Horizontal: 105° Vertical: 55° Diagonal: 125°	Horizontal: 175° Vertical: 50°
Wi-Fi Standard	2.4/5GHz Dual-Band Wi-Fi	2.4GHz Wi-Fi	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi	2.4/5GHz Dual-Band Wi-Fi	2.4/5GHz Dual-Band Wi-Fi	2.4/5GHz Dual-Band Wi-Fi 6
Recording Modes	Motion Recording	Motion Recording	Motion Recording	Motion Recording; Pre-Recording; Continuous Recording	Motion Recording	Motion Recording	Motion Recording	Motion Recording
Solar Charging	–	20-Min Charge = 24 Hours of Power	1-Hour Charge = 24 Hours of Power	20-Min Charge = 24 Hours of Power	20-Min Charge = 24 Hours of Power	20-Min Charge = 24 Hours of Power	20-Min Charge = 24 Hours of Power	20-Min Charge = 24 Hours of Power
Spotlight	–	–	✓	✓	✓	✓	✓	✓
Night Vision	IR Night Vision	IR Night Vision	Color + IR Night Vision	ColorX Night Vision	Color + IR Night Vision	Color + IR Night Vision	Color + IR Night Vision	ColorX Night Vision
Smart Alarm	Motion/Person/ Vehicle/Animal Detection	Motion/Person/ Vehicle Detection	Motion/Person/ Vehicle/Animal Detection	Motion/Person/ Vehicle/Animal Detection	Motion/Person/ Vehicle/Animal Detection	Motion/Person/ Vehicle/Animal Detection	Motion/Person/ Vehicle/Animal Detection	Motion/Person/ Vehicle/Animal Detection
Local storage	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub and Wi-Fi NVR	- microSD Card Slot (up to 256GB) - Compatible with Reolink Home Hub and Wi-Fi NVR	- microSD Card Slot (up to 256GB) - Compatible with Reolink Home Hub and Wi-Fi NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub and Wi-Fi NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub and Wi-Fi NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub and Wi-Fi NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub and Wi-Fi NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub and Wi-Fi NVR
Weatherproof	IP67	IP65	IP65	IP66	IP65	IP66	IP65	IP66

*The data on the pages above is obtained under specific test conditions. Actual use may vary. All specifications are subject to change without notice.

Pan & Tilt Cameras

	Argus PT (B430)	Argus PT Ultra (B440) - Auto Tracking Version	Altas PT Ultra (B660)	Reolink TrackMix (B770)	OMVI 2i Ultra (B816)
Resolution	5MP	8MP	8MP	8MP + 2MP	8MP + 5MP
Battery Capacity	6000mAh	6000mAh	20,000mAh	5100mAh(7.2V)	10000mAh
Battery Life	Up to 4 Months	Up to 5 Months	Up to 16 Months	Up to 6 Months	Up to 6 Months
Field of View	Horizontal: 90° Vertical: 47° Diagonal: 110°	Horizontal: 90° Vertical: 47° Diagonal: 110°	Horizontal: 90° Vertical: 50° Diagonal: 110°	Horizontal: 108.4° - 38° Vertical: 57.3° - 21.2°	Horizontal: 110°~59° Vertical: 58°~32° Diagnol: 133°~68°
Lens	Single Lens	Single Lens	Single Lens	Dual-Lens, Dual View	One Fixed Lens & One Tracking Lens
Wi-Fi Standard	2.4/5GHz Dual-Band Wi-Fi	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi 6
Recording Modes	Motion Recording	Motion Recording	Motion Recording; Pre-Recording; Continuous Recording	Motion Recording	Motion Recording
Solar Charging	20-Min Charge = 24 Hours of Power	20-Min Charge = 24 Hours of Power	2-Hour Charge = 24 Hours of Power	10-Min Charge = 24 Hours of Power	30-Min Charge = 24 Hours of Power
Spotlight	✓	✓	✓	✓	✓
Night Vision	Color + IR Night Vision	Color + IR Night Vision	ColorX Night Vision	Color + IR Night Vision	Color + IR Night Vision
Smart Alarm	Motion/Person/Vehicle/ Animal Detection	Motion/Person/Vehicle/ Animal Detection	Motion/Person/Vehicle/ Animal Detection	Motion/Person/Vehicle/ Animal Detection	Motion/Person/Vehicle/ Animal Detection
Local storage	- microSD Card Slot (up to 128GB) - Compatible with Reolink Home Hub and Wi-Fi NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub and Wi-Fi NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub and Wi-Fi NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub and Wi-Fi NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink Home Hub and Wi-Fi NVR
Tracking	_	Auto Tracking	Auto Tracking	Auto-Zoom Tracking	Auto Tracking
Pan & Tilt	Pan: 355°, Tilt: 140°	Pan: 355°, Tilt: 140°	an: 355°, Tilt: 90°	Pan: 355°, Tilt: 50°	Pan: 355°, Tilt: 50°
Weatherproof	IP64	IP64	IP65	IP65	IP65

*The data on the pages above is obtained under specific test conditions. Actual use may vary. All specifications are subject to change without notice.

PoE Cameras

Reliable Powering & Network Connection

Reolink's PoE solutions have evolved from standard fixed-focus cameras into a sophisticated lineup of high-performance security tools. Today's ecosystem features 16MP Ultra HD clarity, dual-lens wide-angle views, and intelligent tracking. Designed for 24/7 protection, these cameras provide a stable, wired connection and can be used as standalone devices or integrated into a comprehensive NVR system.

Why Choose Reolink PoE Security?

Simplify your infrastructure with Power over Ethernet (PoE) technology. A single network cable handles both high-speed data and power, eliminating the need for nearby electrical outlets and complex wiring.

24/7
Recording

Plug & Play
Installation

H.264 & H.265
Efficient Video Compression

UP TO
16MP
Clarity

DIY PoE Security Camera Setup

OMVI X16 PoE(P952)

24MP Panoramic PTZ Security Camera

Triple-Lens Coverage

16MP Dual-Lens 180° Ultra-Wide View 8MP PTZ Camera with 16X Optical Zoom

SyncTrack

SyncTrack ensures coordinated tracking, while Auto Framing zooms in on detected objects.

Auto Patrol System

Supports preset points, guard positions, and automatic cruising for efficient area coverage.

AI Video Search

Find key moments quickly with intelligent AI-powered search.

Smart Detection

Receive accurate alerts for people, vehicles, and animals.

Perimeter Protection

Get smarter security with line crossing, intrusion, and loitering detection.

*The 24MP total resolution is achieved by combining the pixel counts of the three individual lenses.

OMVI 3i PoE(P931)

18MP Triple Lens Panoramic Pan-Tilt Security Camera

Triple-Lens Coverage

10MP Dual-Lens 180° Ultra-Wide View
8MP Pan & Tilt Camera

SyncTrack

SyncTrack ensures coordinated tracking, while Auto Framing zooms in on detected objects.

Customizable Preset Points

Support up to 64 preset points for instant access to key areas, with automatic return to the guard position

AI Video Search

Find key moments quickly with intelligent AI-powered search.

Smart Detection

Receive accurate alerts for people, vehicles, and animals.

Perimeter Protection

Get smarter security with line crossing, intrusion, and loitering detection.

*The 18MP total resolution is achieved by combining the pixel counts of the three individual lenses.

Duo 3 PoE (P750)

16MP Clarity with Dual-Lens Design

16MP

16MP UHD

Capture every critical detail with unmatched 16MP clarity.

180°

180° Panorama

Two images seamlessly stitched for full 180° coverage.

Color Night Vision

Get full-color nighttime recordings with its spotlights on.

Motion Track

Visualize motion paths over time for quick activity previews.

4-Core SoC Processing

Enhance encoding efficiency for smoother video streaming and lower latency.

Two-Way Audio

Communicate instantly with anyone near your camera.

Duo 3V PoE (P757)

16MP UHD with IK10 Vandal-Proof Housing

16MP

16MP HD

Capture every moment in unmatched 16MP clarity.

180°

180° Panorama

Two images are seamlessly stitched for a complete 180° view.

IK10 Vandal-Proof

Built tough to resist impact and prevent vandalism.

Motion Track

Visualize motion paths over time for quick activity previews.

Color Night Vision

Deliver superior low-light performance with an F1.6 large aperture and built-in spotlights.

Smart Detection

Receive accurate alerts for people, vehicles, and animals — not just motion.

TrackMix PoE (P760)

Tracking Made Smart

4K

4K 8MP Ultra HD

Capture every detail in stunning clarity and deliver sharp visuals even when digitally zoomed in.

Auto-Zoom Tracking

Automatically pan, tilt, and zoom to follow moving targets precisely.

6X

6X Hybrid Zoom

Integrate the two lenses' zooming capacities for more delicate details.

Dual View Display

View both a wide-anglet and a close-up feed on the same screen.

Color Night Vision

See through the night in rich colors with its spotlights on.

Smart Detection

Distinguish people, vehicles, and animals from other objects.

PoE Cameras

Pan & Tilt Cameras

	E1 Outdoor SE PoE (E550P)	RLC-823S1 (P840)	RLC-823S2 (P850)	TrackMix PoE (P760)	OMVI 3i PoE (P931)	OMVI X16 PoE (P952)
Resolution	4K 8MP (3840 x 2160)	4K 8MP (3840 x 2160)	4K 8MP (3840 x 2160)	Max. 4K 8MP (3840 x 2160)	Max. 4K 8MP (3840 x 2160)	Max. 4K 8MP (3840 x 2160)
Lenses	Single Lens	Single Lens	Single Lens	Dual Lenses (Wide-Angle & Telephoto)	Triple Lenses	Triple Lenses
Field of View	Horizontal: 88° Vertical: 45°	Horizontal: 105° - 36° Vertical: 55° - 17°	Horizontal: 54.2° - 3.6° Vertical: 41.7° - 2.1°	Horizontal: 104° - 38° Vertical: 60° - 21°	Horizontal: 104° - 38° Vertical: 60° - 21°	Horizontal: 104° - 38° Vertical: 60° - 21°
Pan & Tilt	Pan: 355°, Tilt: 50°	Pan: 360°, Tilt: 90°	Pan: 360°, Tilt: 90°	Pan: 355°, Tilt: 90°	Pan: 355°, Tilt: 90°	Pan: 355°, Tilt: 90°
Zoom	Digital Zoom	5× Optical Zoom + Digital Zoom	16× Optical Zoom+ Digital Zoom	6× Hybrid Zoom	6× Hybrid Zoom	6× Hybrid Zoom
Smart Alarm	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/ Animal Detection
Tracking Method	Auto Tracking	Auto Tracking	Auto Tracking	Auto-Zoom Tracking	Auto Tracking	Auto Tracking
Night Vision	Infrared Night Vision (up to 40ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 190ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 260ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)
Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio
Frame Rate	Max. 25 FPS	Max. 25 FPS	Max. 25 FPS	Max. 25 FPS	Max. 25 FPS	Max. 25 FPS
Preset Points	Up to 64	Up to 64	Up to 64	Up to 64	Up to 64	Up to 64
Auto Patrol	–	✓	✓	–	–	–
Storage Options	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud
Network Interface	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)
Power Supply	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 2A, PoE (IEEE 802.3at)	DC 12V / 2A, PoE (IEEE 802.3at)	DC 12V / 2A, PoE (IEEE 802.3af)	DC 12V / 2A, PoE (IEEE 802.3af)	DC 12V / 2A, PoE (IEEE 802.3af)
Weatherproof	IP65	IP66	IP66	IP65	IP65	IP65
Time Lapse	✓	✓	✓	✓	✓	✓

*The data on the pages above is obtained under specific test conditions. Actual use may vary. All specifications are subject to change without notice.

PoE Cameras

Bullet Cameras

	RLC-510A (P321)	P320	RLC-810A (P331)	P330	CX810 (P330X)
Resolution	5MP (2560 x 1920)	5MP (2560 x 1920)	4K 8MP (3840 x 2160)	4K 8MP (3840 x 2160)	4K 8MP (3840 x 2160)
Lenses	Single Lens	Single Lens	Single Lens	Single Lens	Single Lens
Field of View	Horizontal: 80° Vertical: 48°	Horizontal: 96° Vertical: 70°	Horizontal: 87° Vertical: 44°	Horizontal: 105° Vertical: 56°	Horizontal: 93.2° Vertical: 48.2°
Zoom	Digital Zoom	Digital Zoom	Digital Zoom	Digital Zoom	Digital Zoom
Video Compression	H.265/H.264	H.265/H.264	H.265/H.264	H.265/H.264	H.265/H.264
Smart Alarm	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection
Night Vision	Infrared Night Vision (up to 100ft)	Color Night Vision (with Spotlight) Infrared Night Vision, up to 100ft	Infrared Night Vision (up to 100ft)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Color Night Vision (with Spotlight)
Audio	Audio Recording	Two-Way Audio	Audio Recording	Two-Way Audio	Two-Way Audio
Frame Rate	Max. 25 FPS	Max. 30 FPS	Max. 25 FPS	Max. 25 FPS	Max. 25 FPS
Perimeter Protectio	Line Crossing Alert, Zone IntrusionAlert, Zone Loitering Alert	Line Crossing Alert, Zone IntrusionAlert, Zone Loitering Alert	Line Crossing Alert, Zone IntrusionAlert, Zone Loitering Alert	—	Line Crossing Alert, Zone IntrusionAlert, Zone Loitering Alert
Storage Options	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud
Network Interface	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)
Power Supply	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)
Weatherproof	IP67	IP67	IP67	IP67	IP67
Time Lapse	✓	✓	✓	✓	✓

*The data on the pages above is obtained under specific test conditions. Actual use may vary. All specifications are subject to change without notice.

	RLC-811A (P430)	RLC-1212A (P341)	P340	Duo 2 PoE (P730)	Duo 3 PoE (P750)
	4K 8MP (3840 x 2160)	12MP (4512 x 2512)	12MP (4512 x 2512)	4K 8MP (4608 x 1728)	16MP (7680 x 2160)
	Single Lens	Single Lens	Single Lens	Dual Lenses	Dual Lenses
	Horizontal: 36°-105° Vertical: 17°-55°	Horizontal: 97° Vertical: 50.6°	Horizontal: 100.4° Vertical: 50.6°	Horizontal: 180° Vertical: 60°	Horizontal: 180° Vertical: 55°
	5× Optical Zoom + Digital Zoom	Digital Zoom	Digital Zoom	Digital Zoom	Digital Zoom
	H.265/H.264	H.265/H.264	H.265/H.264	H.265/H.264	H.265/H.264
	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection
	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)
	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio
	Max. 25 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS
	Line Crossing Alert, Zone IntrusionAlert, Zone Loitering Alert	Line Crossing Alert, Zone IntrusionAlert, Zone Loitering Alert	Line Crossing Alert, Zone IntrusionAlert, Zone Loitering Alert	Line Crossing Alert, Zone IntrusionAlert, Zone Loitering Alert	Line Crossing Alert, Zone IntrusionAlert, Zone Loitering Alert
	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud
	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)
	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 2A, PoE (IEEE 802.3af)	DC 12V / 2A, PoE (IEEE 802.3af)
	IP67	IP67	IP67	IP67	IP67
	✓	✓	✓	✓	✓

PoE Cameras

Dome & Turret Cameras

	RLC-520A (P325)	P324	RLC-820A (P335)	P334	CX820 (P335X)
Resolution	5MP (2560 x 1920)	5MP (2880 x 1616)	4K 8MP (3840 x 2160)	4K 8MP (3840 x 2160)	4K 8MP (3840 x 2160)
Lenses	Single Lens	Single Lens	Single Lens	Single Lens	Single Lens
Field of View	Horizontal: 80° Vertical:48°	Horizontal: 96° Vertical: 70°	Horizontal: 87° Vertical:44°	Horizontal: 105° Vertical: 56°	Horizontal: 93.2° Vertical: 48.2°
Zoom	Digital Zoom	Digital Zoom	Digital Zoom	Digital Zoom	Digital Zoom
Video Compression	H.265/H.264	H.265/H.264	H.265/H.264	H.265/H.264	H.265/H.264
Smart Alarm	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection
Night Vision	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Color Night Vision (with Spotlight) Infrared Night Vision, up to 100ft	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Color Night Vision (with Spotlight)
Audio	Audio Recording	Two-Way Audio	Audio Recording	Two-Way Audio	Two-Way Audio
Frame Rate	Max. 25 FPS	Max. 30 FPS	Max. 25 FPS	Max. 25 FPS	Max. 25 FPS
Perimeter Protectio	Line Crossing Alert, Zone IntrusionAlert, Zone Loitering Alert	Line Crossing Alert, Zone IntrusionAlert, Zone Loitering Alert	Line Crossing Alert, Zone IntrusionAlert, Zone Loitering Alert	—	Line Crossing Alert, Zone IntrusionAlert, Zone Loitering Alert
Vandal Proof	—	—	—	—	—
Storage Options	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR
Network Interface	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)
Power Supply	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)
Weatherproof	IP67	IP67	IP67	IP67	IP67
Time Lapse	✓	✓	✓	✓	✓

*The data on the pages above is obtained under specific test conditions. Actual use may vary. All specifications are subject to change without notice.

	RLC-840A (P337)	RLC-843A (P437)	RLC-1224A (P345)	P344	RLC-1240A (P347)	Duo 2V PoE (P737)	Duo 3V PoE (P757)
	4K 8MP (3840 x 2160)	4K 8MP (3840 x 2160)	12MP (4512 x 2512)	12MP (4512 x 2512)	12MP (4512 x 2512)	4K 8MP (5120 x 1552)	16MP (7680 x 2160)
	—	Single Lens	Single Lens	Single Lens	Single Lens	Dual Lenses	Dual Lenses
	Horizontal:105° Vertical: 56°	Horizontal: 105° - 31° Vertical: 55° - 17°	Horizontal: 97° Vertical: 50.6°	Horizontal:100.4°; Vertical: 50.6°	Horizontal:115° Vertical: 59°	Horizontal: 180° Vertical: 57°	Horizontal: 180° Vertical: 53°
	Digital Zoom	5× Optical Zoom + Digital Zoom	Digital Zoom	Digital Zoom	Digital Zoom	Digital Zoom	Digital Zoom
	H.265/H.264	H.265/H.264	H.265/H.264	H.265/H.264	H.265/H.264	H.265/H.264	H.265/H.264
	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection	Person/Vehicle/Animal Detection
	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)	Infrared Night Vision (up to 100ft) Color Night Vision (with Spotlight)
	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio
	Max. 25 FPS	Max. 25 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS	Max. 20 FPS
	Line Crossing Alert, Zone Intrusion Alert, Zone Loitering Alert	—	Line Crossing Alert, Zone Intrusion Alert, Zone Loitering Alert	Line Crossing Alert, Zone Intrusion Alert, Zone Loitering Alert	Line Crossing Alert, Zone Intrusion Alert, Zone Loitering Alert	Line Crossing Alert, Zone Intrusion Alert, Zone Loitering Alert	Line Crossing Alert, Zone Intrusion Alert, Zone Loitering Alert
	IK10	IK10	—	—	IK10	IK10	IK10
	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud	- microSD Card Slot (up to 512GB) - Compatible with Reolink NVR; Reolink Cloud
	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)	1 x 10/100 Mbps Ethernet Port (RJ45)
	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 1A, PoE (IEEE 802.3af)	DC 12V / 2A, PoE (IEEE 802.3af)	DC 12V / 2A, PoE (IEEE 802.3af)
	IP67	IP67	IP67	IP67	IP67	IP67	IP67
	✓	✓	✓	✓	✓	✓	✓

4G Cameras

Go Wireless, Worry Less

Reolink 4G solutions provide professional-grade monitoring in locations where traditional Wi-Fi and power grids are unavailable. Evolving from basic remote viewing to advanced systems featuring 4K resolution, ColorX night vision, and intelligent tracking, these cameras offer an essential safeguard for off-grid properties, industrial sites, and outdoor exploration.

Why Choose Reolink 4G Security?

Reolink 4G cameras operate on cellular networks, making them the ideal solution for environments without internet infrastructure. Whether you are managing a remote construction site, a farm, or a wildlife study, these cameras ensure you stay connected to what matters most.

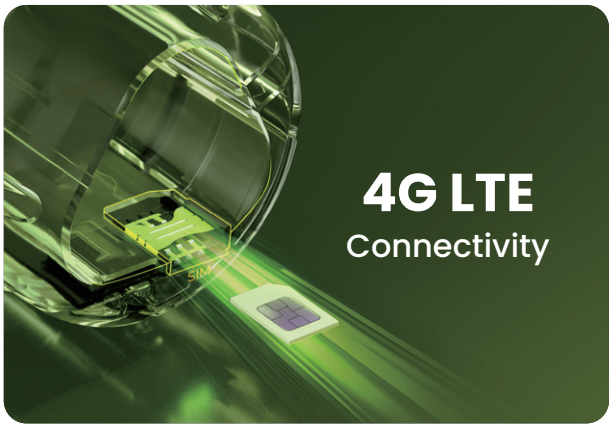

No Mandatory Subscription

Totally Wire Free

Go Ranger PT (G450)

Expertly Designed for the Wild

4K

4K 8MP Ultra HD

Capture stunning 4K 8MP images with every detail of the natural environment.

No-Glow IR LEDs (940nm)

940nm no-glow IR LEDs capture wildlife movements discreetly in complete darkness.

355° Pan & 140° Tilt

It can pan and tilt to capture the movement of the wildlife.

Animal Recognition

Recognize animals such as bucks, antlerless deer, and turkeys.

Real-Time Live View

View live 4K footage for up to 20 minutes at a time through the Reolink App.

Picture & Video Modes

Capture both high-quality images and videos, retaining the best shots automatically.

Reolink Elite LTE (G760)

180° Panoramic View, From Anywhere

4K

4K 180° Blindspot-Free

Dual-lens design delivers a seamless panoramic view in vivid 4K.

ColorX Night Vision

See vivid, true-to-life colors even in low-light conditions.

Smart Detection

Detect people, vehicles, and animals accurately, sending real-time alerts.

Sports Mode

Record full games non-stop in 180° view. Capture every play from start to finish.

Solar Powered

Enjoy non-stop power and zero maintenance with Reolink Solar Panel.

Flexible Storage Options

Save footage locally with up to 512GB microSD support, or choose FTP and Reolink Cloud for off-site backup.

TrackMix LTE Plus 2 (G790)

24/7 Guarding with a High-Capacity Battery

24/7 Continuous Recording

Record continuously for up to 21 days* on a single charge, capturing every moment.

Nonstop Solar Power

Continuous solar power with a 30W solar panel and a high-capacity 92Wh battery. No manual charging required.

ColorX Night Vision

Experience vivid, true-to-life colors in 2K resolution, even in low-light condition.

Winter-Tested & Reliable

Operate reliably in extreme cold, down to -10°C, including charging.

Auto-Zoom Tracking

Automatically pan, tilt, and zoom to follow moving objects with precision

Smart Detection

Detect people, vehicles, and animals accurately, sending real-time alerts.

Altas Go PT (G650)

Advanced 4G Security with Pre-Recording

10s Pre-Recording

Start recording 10 seconds before an event to ensure no moment is missed.

20,000mAh Battery

Deliver up to 6 months* of battery life on a full charge under typical usage.

ColorX Night Vision

See vivid, true-to-life colors even in low-light conditions.

2K

2K Super HD

Capture clear images and videos with great detail.

Auto Tracking

Automatically follow moving objects with 355° pan and 90° tilt.

Smart Detection

Distinguish people, vehicles, and animals from other trivial things.

*Based on 300 seconds of motion-triggered recording per day.

4G Cameras

Single-Lens Cameras

	Reolink Go Plus (G330) +Solar Panel	Reolink Elite LTE (G760) +Solar Panel	Reolink Go PT S Lite (G420S) +Solar Panel	Reolink Go PT Plus (G430) +Solar Panel	Reolink Go PT Ultra (G440) +Solar Panel
Resolution	2K 4MP (2560 x 1440)	4K 8MP (5376 x 1520)	2K 4MP (2560 x 1440)	2K 5MP (2880 x 1616)	4K 8MP (3840 x 2160)
Field of View	Horizontal: 105° Vertical: 55° Diagonal: 125°	Horizontal: 180° Vertical: 50°	Horizontal: 95° Vertical: 52° Diagonal: 112°	Horizontal: 90° Vertical: 47° Diagonal: 110°	Horizontal: 90° Vertical: 47° Diagonal: 110°
Battery Capacity	7,800 mAh (28 Wh)	10,000 mAh (36Wh)	6,000 mAh (21 Wh)	6,000 mAh (21 Wh)	6,000 mAh (21 Wh)
Power Supply	Solar Power, Rechargeable Battery	Solar Power, Rechargeable Battery	Solar Power, Rechargeable Battery	Solar Power, Rechargeable Battery	Solar Power, Rechargeable Battery
Pan & Tilt	–	–	Pan: 355°, Tilt: 140°	Pan: 355°, Tilt: 140°	Pan: 355°, Tilt: 140°
Zoom	10× Digital Zoom	10× Digital Zoom	10× Digital Zoom	10× Digital Zoom	10× Digital Zoom
Tracking Method	–	–	Auto Tracking	–	–
Night Vision	Infrared Night Vision, up to 10 Meters (33 ft)	ColorX Night Vision Infrared Night Vision, up to 10 Meters (33ft)	Color Night Vision (with Spotlight) Infrared Night Vision, up to 10 Meters(33 ft)	Color Night Vision (with Spotlight) Infrared Night Vision, up to 10 Meters(33 ft)	Color Night Vision (with Spotlight) Infrared Night Vision, up to 10 Meters(33 ft)
Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio
Recording Modes	Motion Recording	Motion Recording	Motion Recording	Motion Recording	Motion Recording
Smart Alarm	Person/Vehicle/ Animal Detection	Person/Vehicle/ Animal Detection	Person/Vehicle/ Animal Detection	Person/Vehicle/ Animal Detection	Person/Vehicle/ Animal Detection
Weatherproof	IP65	IP66	IP65	IP65	IP65
Storage Options	- microSD Card Slot (up to 512GB) - Supports FTP; Reolink Cloud	- microSD Card Slot (up to 512GB) - Supports FTP; Reolink Cloud	- microSD Card Slot (up to 512GB) - Supports FTP; Reolink Cloud	- microSD Card Slot (up to 128GB) - Supports FTP; Reolink Cloud	- microSD Card Slot (up to 128GB) - Supports FTP; Reolink Cloud
Built-In SIM Card	–	–	✓	–	–
Time Lapse	✓	✓	✓	✓	✓
Sports Recorder	–	✓	–	–	–
Solar Charging	15-Min Charge = Endless Power	15-Min Charge = Endless Power	15-Min Charge = Endless Power	15-Min Charge = Endless Power	10-Min Charge = Endless Power

*The data on the pages above is obtained under specific test conditions. Actual use may vary. All specifications are subject to change without notice.

Dual-Lens Cameras

Reolink Altas Go PT (G650) +Solar Panel	Reolink Go Ranger PT (G450) +Solar Panel	Reolink TrackMix LTE (G770) +Solar Panel	TrackMix LTE Plus 2 (G790) +Solar Panel Plus
2K 4MP (2560 x 1440)	4K 8MP (3840 x 2160)	Max. 4K 8MP (3840 x 2160)	Max. 2K 4MP (2560 x 1440)
Horizontal: 104° Vertical: 54° Diagonal: 108°	Horizontal: 90° Vertical: 47° Diagonal: 110°	Horizontal: 108.4° - 38° Vertical: 57.3° - 21.2°	Horizontal: 102.1° - 37.5° Vertical: 56.3° - 22.1°
20,000 mAh (66 Wh)	6,000 mAh (21 Wh)	5,100 mAh (36 Wh)	12,800 mAh (92 Wh)
Solar Power, Rechargeable Battery	Solar Power, Rechargeable Battery	Solar Power, Rechargeable Battery	Solar Power, Rechargeable Battery
Pan: 355°, Tilt: 90°	Pan: 355°, Tilt: 140°	Pan: 355°, Tilt: 90°	Pan: 355°, Tilt: 90°
10× Digital Zoom	10× Digital Zoom	10× Digital Zoom + 6× Hybrid Zoom	10× Digital Zoom + 6× Hybrid Zoom
Auto Tracking	–	Auto-Zoom Tracking	Auto-Zoom Tracking
ColorX Night Vision Infrared Night Vision, up to 10 Meters (33 ft)	Infrared Night Vision, up to 10 Meters (33 ft)	IR Night Vision distance up to 30M (98ft)	IR Night Vision distance up to 30M (98ft)
Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio
Motion Recording; Pre-Recording; Continuous Recording	Motion Recording	Motion Recording	Motion Recording; Pre-Recording; Continuous Recording
Person/Vehicle/ Animal Detection	Person/Vehicle/ Animal Detection	Person/Vehicle/ Animal Detection	Person/Vehicle/ Animal Detection
IP65	IP65	IP65	IP65
- microSD Card Slot (up to 512GB) - Supports FTP; Reolink Cloud	- microSD Card Slot (up to 128GB) - Supports FTP; Reolink Cloud	- microSD Card Slot (up to 128GB) - Supports FTP; Reolink Cloud	- microSD Card Slot (up to 512GB) - Supports FTP; Reolink Cloud
–	–	–	–
✓	✓	✓	✓
–	–	–	–
1-Hour Charge = 24 Hours of Power	10-Min Charge = Endless Power	10-Min Charge = Endless Power	15-Min Charge = Endless Power

*The data on the pages above is obtained under specific test conditions. Actual use may vary. All specifications are subject to change without notice.

Floodlight Cameras

Safety in Sight, Moments in Light

Powerful lighting and intelligent surveillance come together in one device, combining up to 3000-lumen brightness, smart motion detection, and up to 16MP resolution. Light and video work in harmony to deter, capture, and protect what matters most.

Why Reolink Floodlight Solution?

Bright, smart, and secure, Reolink Floodlight Cameras combine up to 3000-lumen lighting, up to 16MP video, motion detection, and a 110dB siren to deter threats and protect your home day or night.

Built-in
110dB Siren

Multiple Connection
Options

Elite Floodlight WiFi (F751W)

The dual-lens design provides an ultra-wide view.

4K

4K 8MP Ultra HD

Capture every detail in stunning 4K Ultra HD with sharp, lifelike clarity.

3000-Lumen LEDs

Adjustable 3000-lumen LEDs for optimal brightness, comfort, and security.

Color Night Vision

See vivid, true-to-life colors —even after dark.

AI Video Search

Quickly find important moments with intelligent AI video search.

Adjustable Color Temperature

Adjust the lighting color temperature to suit your environment.

Perimeter Protection

Get smarter security with Line Crossing, Zone Intrusion, and Zone Loitering detection.

Floodlight Cameras

	Wi-Fi Floodlight Cameras			PoE Floodlight Cameras	
	Solar Floodlight Cam (F310B)	TrackFlex Floodlight WiFi(F850W)	Elite Floodlight WiFi (F751W)	Elite Pro Floodlight PoE (F760P)	TrackFlex Floodlight PoE(F850P)
Resolution	4MP	8MP + 4MP	8MP	16MP	8MP + 4MP
Lenses	Single Lens	Dual Lenses	Dual Lenses	Dual Lenses	Dual Lenses
Field of View	Horizontal: 124.5° Vertical: 69.6° Diagonal: 150.5°	Horizontal: 104° - 38° Vertical: 60° - 21°	Horizontal: 180° Vertical: 59°	Horizontal: 180° Vertical: 55°	Horizontal: 104° - 38° Vertical: 60° - 21°
Pan & Tilt	–	Pan:355°, Tilt: 50°	–	–	Pan:355°, Tilt: 50°
Power Supply	Solar Power	AC Power (100-240 V) 5 V / 2 A USB-C (for Setup Only)	AC Power (100-240 V) 5 V / 2 A USB-C (for Setup Only)	PoE (IEEE 802.3at)	PoE (IEEE 802.3at)
Network Connectivity	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi 6	2.4/5GHz Dual-Band Wi-Fi 6	PoE with 1 x 10/100 Mbps Ethernet Port (RJ45)	PoE with 1 x 10/100 Mbps Ethernet Port (RJ45)
Tracking Method	–	Auto-Zoom Tracking	–	–	Auto-Zoom Tracking
AI Video Search	–	✓	✓	✓	✓
Perimeter Protection	–	–	✓	✓	–
Zoom	–	6× Hybrid Zoom	Digital Zoom	Digital Zoom	6× Hybrid Zoom
Floodlights	2 Movable Panels, up to 1000 Lumens (3000-6000 Kelvin)	2 Movable Panels, up to 3000 Lumens (3000-6500 Kelvin)	2 Movable Panels, up to 3000 Lumens (3000-6500 Kelvin)	2 Movable Panels, up to 2800 Lumens (3000-6500 Kelvin)	2 Movable Panels, up to 2800 Lumens (3000-6500 Kelvin)
Night Vision	Color + IR Night Vision	Color + IR Night Vision	Color + IR Night Vision	Color + IR Night Vision	Color + IR Night Vision
Weatherproof	IP66	IP66	IP66	IP66	IP66
Local Storage	microSD Card Slot (up to 512GB)	microSD Card Slot (up to 512GB)	microSD Card Slot (up to 512GB)	microSD Card Slot (up to 512GB)	microSD Card Slot (up to 512GB)
Battery Life	Up to 3 Months	–	–	–	–
Solar Charging	1-Hour Charge = 24 Hours of Power	–	–	–	–

*The data on the pages above is obtained under specific test conditions. Actual use may vary. All specifications are subject to change without notice.

Video Doorbells

See Who’s Knocking, Feel Safer

Reolink Video Doorbells are designed to make every doorstep interaction smarter and more seamless. With ultra-clear video, intelligent person detection, and head-to-toe view, you can see every visitor in detail and communicate effortlessly through real-time video calls. Integrated with smart home systems, Reolink doorbells bring connected convenience and peace of mind to your front door.

Why Choose Reolink Video Doorbell Security?

Reolink Video Doorbells keep your front door smarter and safer. With ultra-clear head-to-toe video, intelligent person detection, and real-time two-way audio, you can see, speak to, and respond to visitors instantly. Integrated with smart home systems and multiple connection options, they bring convenience, security, and peace of mind to every doorstep.

Two-Way Audio

Quick Replies

Reolink Video Doorbell (D340B)

Smart Guard Right at Your Door

2K

2K 4MP Super HD

Capture every detail in stunning 2K clarity, giving you greater peace of mind.

1:1 Head-to-Toe View

Enjoy a full 180° diagonal head-to-toe view, covering everything in front of your door.

Smart Detection

Detect people, vehicles, and packages, sending alerts for what matters most.

Multiple Chime Options

Work with multiple chimes, including your existing doorbell chimes.

Dual-Band Wi-Fi Network

Support 2.4/5 GHz dual-band Wi-Fi for flexible and reliable connectivity.

Local Storage

Offer ample storage with support for up to a 256GB microSD card.

Video Doorbells

	Wired Doorbells		Battery Doorbells	
	Video Doorbell PoE (D340P)	Video Doorbell WiFi (D340W)	Video Doorbell SE (D330B)	Video Doorbell (D340B)
Resolution	2K 5MP (2560 x 1920)	2K 5MP (2560 x 1920)	2K 3MP (1920x1440)	2K 4MP (2048 x 2048)
Aspect Ratio	4:3	4:3	4:3	1:1
Field of View	Horizontal: 134° Vertical: 97° Diagonal: 180°	Horizontal: 134° Vertical: 97° Diagonal: 180°	Horizontal: 120° Vertical: 90° Diagonal: 155°	Horizontal: 150° Vertical: 150° Diagonal: 180°
Infrared Night Vision	✓	✓	✓	✓
Power Supply	- PoE - AC 12–24 V, 40 VA Max - DC 24 V / 0.5 A	- AC 12–24 V, 40 VA Max - DC 24 V / 0.5 A	- Removable 4 AA Alkaline Batteries - AC 8–24 V, 40 VA Max - DC 24 V / 0.5 A	- Built-In Lithium Battery - AC 8–24 V, 40 VA Max - DC 24 V / 0.5 A
Network Connectivity	Ethernet	2.4/5GHz Dual-Band WiFi; Ethernet	2.4/5GHz Dual-Band WiFi; Ethernet	2.4/5GHz Dual-Band Wi-Fi
Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio	Two-Way Audio
Recording Modes	Motion Recording; Pre-Recording; 24/7 Recording	Motion Recording; Pre-Recording; 24/7 Recording	Battery: Motion Recording Wired: Pre-Recording; 24/7 Recording	Battery: Motion Recording Wired: Pre-Recording; 24/7 Recording
Chime Options	Reolink Chime; Reolink Home Hub; Google Assistant; Alexa	Reolink Chime; Reolink Home Hub; Google Assistant; Alexa	Existing Wired Chime; Reolink Chime; Reolink Home Hub; Google Assistant; Alexa	Existing Wired Chime; Reolink Chime; Reolink Home Hub; Google Assistant; Alexa
Storage Options	- microSD Card Slot (up to 256GB) - Supports Reolink NVR/Home Hub/ FTP/Reolink Cloud	- microSD Card Slot (up to 256GB) - Supports Reolink NVR/Home Hub/ FTP/Reolink Cloud	- microSD Card Slot (up to 512GB) - Supports Reolink NVR/Home Hub/ FTP/Reolink Cloud	- microSD Card Slot (up to 512GB) - Supports Reolink NVR/Home Hub/ FTP/Reolink Cloud
Smart Alarm	Visitor/Person/Vehicle/ Animal Detection	Visitor/Person/Vehicle/ Animal Detection	Visitor/Person/Vehicle/ Animal Detection	Visitor/Person/Vehicle/Animal/ Package Detection
Smart Home Compatibility	Google Assistant, Alexa, Home Assistant	Google Assistant, Alexa, Home Assistant	Google Assistant, Alexa	Google Assistant, Alexa
Quick Replies	✓	✓	✓	✓
Video Call	✓	✓	✓	✓
HDR	✓	✓	–	✓
Weatherproof	IP65	IP65	✓	IP65

*The data on the pages above is obtained under specific test conditions. Actual use may vary. All specifications are subject to change without notice.

Data Storage Solutions

Safe Storage for All Your Videos

Reolink offers flexible and secure storage options for every scenario: from local microSD cards and NVRs to encrypted cloud storage. Record continuously or by event, and access footage anytime with smart playback and filters. Multiple plans and capacities ensure your data stays safe, organized, and always within reach.

Why Reolink Data Storage?

Reolink Data Storage keeps your video footage safe, organized, and always accessible. With flexible local storage, NVRs, and encrypted cloud options, you can record continuously or by events, manage data intelligently, and access your videos anytime—securely and effortlessly.

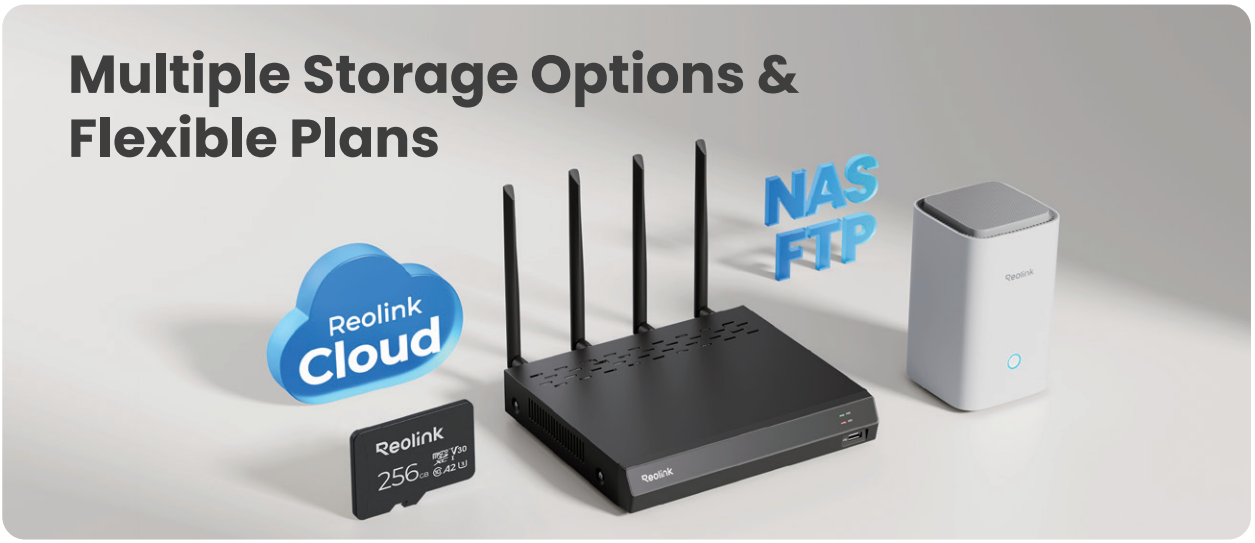

Smart
Data Management

Up to
48TB Local Storage

Up to
250GB Cloud Capacity

Local Storage Solutions

	NVRs					Home Hubs		
	NVS4E	NVS8	NVS16	NVS36	RLN12W	Reolink Home Hub Mini (Hub 1 Lite)	Reolink Home Hub (Hub 1)	Reolink Home Hub Pro (Hub P1)
Cameras Supported	Up to 6 IP Cameras (Max. 4 Wired)	Up to 12 IP Cameras (Max. 8 Wired)	Up to 24 IP Cameras (Max. 16 Wired)	Up to 36 IP Cameras	Up to 16 IP Cameras (Max. 12 Wired)	Up to 8 IP Cameras	Up to 8 IP Cameras	Up to 24 IP Cameras (Max. 12 Wired)
Resolution Supported	Up to 16MP	Up to 16MP	Up to 16MP	Up to 16MP	Up to 16MP	Up to 12MP	Up to 16MP	Up to 16MP
NVR Type	–	PoE NVR	PoE NVR	NVR	Wi-Fi NVR	home hub	home hub	home hub
Device Compatibility	All Reolink Wi-Fi, PoE and Battery-Powered Wi-Fi Cameras	All Reolink Wi-Fi, PoE and Battery-Powered Wi-Fi Cameras	All Reolink Wi-Fi, PoE and Battery-Powered Wi-Fi Cameras	All Reolink Wi-Fi, PoE and Battery-Powered Wi-Fi Cameras	All Reolink Wi-Fi, PoE and Battery-Powered Wi-Fi Cameras	All Reolink Wi-Fi and PoE cameras (Battery-Powered Models Require a Firmware Update to Work with the Hub; Supports up to 12MP Cameras)	All Reolink Wi-Fi and PoE Cameras (Specially Recommended for Reolink Battery-Powered Wi-Fi Cameras)	All Reolink Wi-Fi and PoE Cameras (Specially Recommended for Reolink Battery-Powered Wi-Fi Cameras)
Max. Storage Capacity	Up to 8TB (8TB via SATA)	Up to 16TB (8TB via SATA, 8TB via e-SATA)	Up to 16TB (2 × 8TB via SATA)	Up to 48TB (3 × 16TB via SATA)	8TB (2*4TB via SATA))	Up to 1TB (1 × microSD Card Slot)	Up to 2TB (2 × microSD Card Slots, up to 1TB Each)	Up to 16TB (3.5" SATA)
Video Output	1 × HDMI, 1 × VGA	1 × HDMI, 1 × VGA	1 × HDMI, 1 × VGA	1 × HDMI, 1 × VGA	1 × HDMI, 1 × VGA	–	–	1 × HDMI
Video Compression	H.265+ / H.265 / H.264	H.265 / H.264	H.265 / H.264	H.265 / H.264	H.265 / H.264	H.265 / H.264	H.265 / H.264	H.265 / H.264
USB Interface	2 × USB 2.0	2 × USB 2.0	2 × USB 2.0	2 × USB 2.0, 1 × USB 3.0	2 × USB 2.0	1 × USB 2.0	–	2 × USB 2.0
Network Interface	4 × RJ-45, 10/100 Mbps Self-Adaptive PoE Ethernet Ports (For IPCameras)	8 × RJ-45, 10/100 Mbps Self-Adaptive PoE Ethernet Ports (For IP Cameras)	16 × RJ-45, 10/100 Mbps Self-Adaptive PoE Ethernet Ports (For IP Cameras)	4 × RJ-45 Ethernet, Gigabit Self-Adaptive Ethernet Ports (For IP Cameras/ Swithes)	4 × RJ-45, 10/100 Mbps Self-adaptive Ethernet Ports (For IP Cameras); 1 × RJ-45, 10/100 Mbps Self-Adaptive Ethernet Port (For LAN/WAN)	1 × 10/100 Mbps RJ45 Port for WAN	1 × 10/100 Mbps RJ45 Port for WAN	1 × RJ-45, 10/100 Mbps Self-adaptive Ethernet Port (For IP Cameras); 1 × RJ-45 10/100 Mbps Self-Adaptive Ethernet Port (For WAN)
Max. Power per Port	25 W	25 W	25 W	–	–	–	–	–
Supported Standards	IEEE 802.3 af/at	IEEE 802.3 af/at	IEEE 802.3 af/at	–	–	–	–	–
24/7 Continuous Recording	✓	✓	✓	✓	✓	✓(Fluent Mode)	✓	✓
Remote Access	✓	✓	✓	✓	✓	✓	✓	✓
Heat Map	✓	✓	✓	✓	–	–	–	–

*The data on the pages above is obtained under specific test conditions. Actual use may vary. All specifications are subject to change without notice.

Cloud Storage Solutions

Cloud Storage		
Various plan options	Never lose your footage (even if camera is lost)	Up to 60 days of cloud video history
Up to 30 cameras supported	Up to 256GB of cloud storage	Rich notifications with snapshots

*Reolink Cloud is available in selected countries. Availability and features may vary depending on local regulations.

Accessories

Complete Your Setup for Tailored Protection

Reolink accessories are designed to extend the utility of your cameras, ensuring they stay powered, connected, and positioned exactly where you need them. From high-efficiency solar energy to specialized mounting hardware, these additions allow you to customize your security to fit the specific demands of your property.

Solar Panels

	Reolink Solar Panel	Reolink Solar Panel 2	Reolink Solar Panel 2S	Reolink Solar Panel 3
Maximum Power	3.2 W	5.8 W	5.8 W	12 W
Built-In Battery	–	–	5,900mAh (42Wh)	–
Connector Type	USB Type-C	USB Type-C	USB Type-C	USB Type-C
Cable Length	4 m (13 ft)	4 m (13 ft)	4 m (13 ft)	4 m (13 ft)
Weatherproof	IP65	IP65	IP67	IP65
Mounting Bracket	Included	Included	Included	Included
Strap	Included	Included	Included	Included
Compatibility	Reolink Battery-Powered Cameras	Reolink Battery-Powered Cameras	Reolink Battery-Powered Cameras	Reolink Battery-Powered Cameras

Other Accessories

For more details, visit: https://store.reolink.com/accessories/.

RL-2026-V2-EN

Contact Us

Business Contact: sales@reolink.com
Media Contact: pr@reolink.com
Official Website: reolink.com

Stay Connected

@ReolinkTech

@Reolinkcams

@ReolinkCameras

Visit **reolink.com** for more information

*Specifications and features are subject to change without notice. Product images are for illustration purposes only and may differ from the actual product.

92.08.008.0019