

Copyright © 2020 Vaagn Oganessian

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at





<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and limitations under the License.

Title: F-board.Header		
File: 0_HEADER.SchDoc	Size: A4	
Drawn by: Vaagn Oganessian	Version: v0.1.0	
Date: 23.10.2020	Time: 21:36:04	Sheet: 1 of 2

OpenRV

▲ SENSOR_LED_PWR series resistor and SENSOR_PULSE_OUT pull-up resistor and RC-filter are located on the P-board.

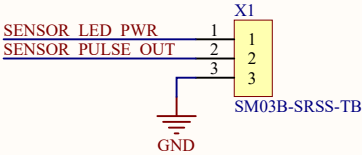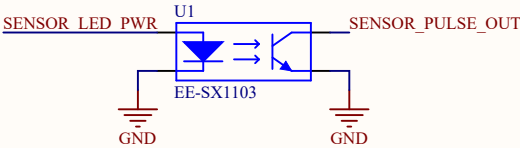

▲ These are motors wire expander connectors. Unfortunately original shutter and focus motor wires may be too short to reach the P-boards in various hardware configuration. Using this expanders and two additional cables the motors wire length problem can be solved.

Title: F-board.Focus	
File: 1_FOCUS.SchDoc	Size: A4
Drawn by: Vaagn Oganessian	Version: v0.1.0
Date: 23.10.2020 Time: 21:36:05	Sheet: 2 of 2

OpenRV