


Connectors & power supply

Input
(FX2CA2-40S-1.27DSAL(71))

Using regulator,
5V->5VD, 3.3VD, 2.5VD, 1.2VD
2.5V->1.8VA
are applied

5V, 2.5V, GND
S03B-VUSS-1

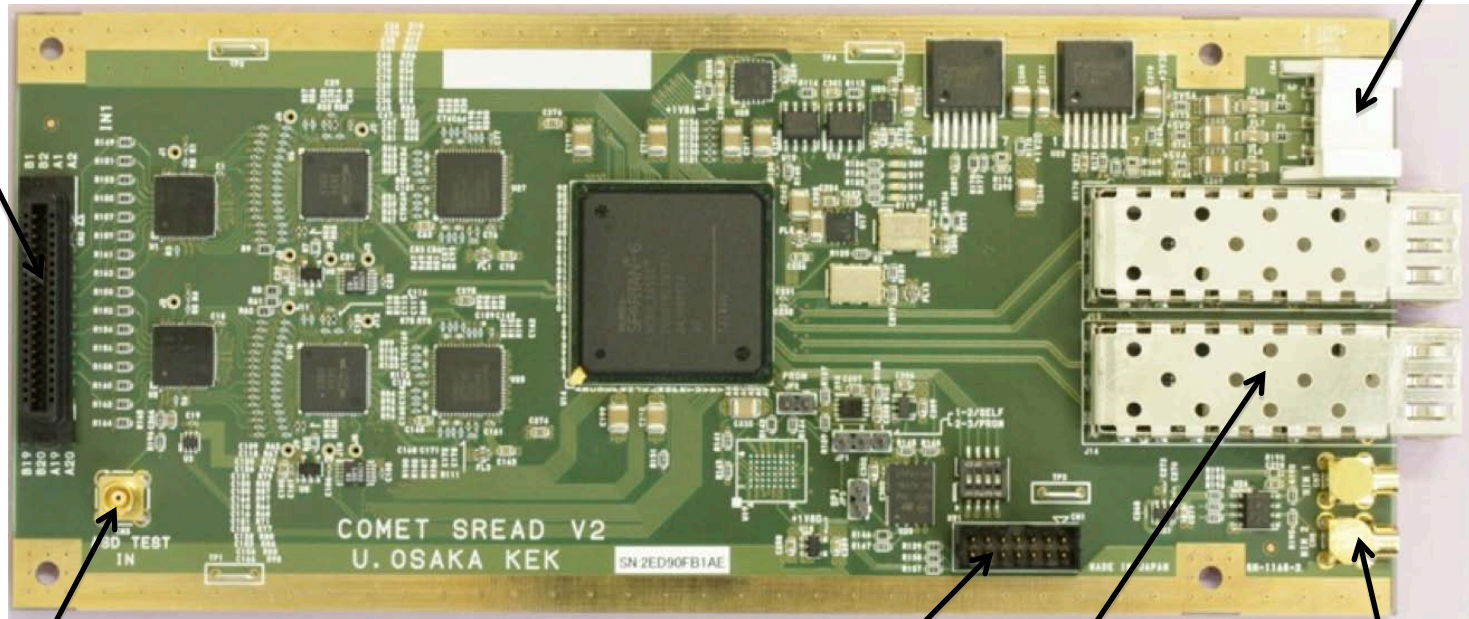

Test pulse input
(MCX)

JTAG

SFP

Ext trig input port X2
NIM sig. (MCX)