


Acc/Gyro->ICM-42670-P
Magnetometer->IIS2MDC
Barometer->BMP388
Flash Mem->W25Q128JVSIG
MCU->STM32F405RG76
LDO->LD39200PU33R

2xSPI
2xI2C
4xUART
1xSWD

The /HOLD and /WP pins will be connected to 3.3V via a 10k pull-up resistor.

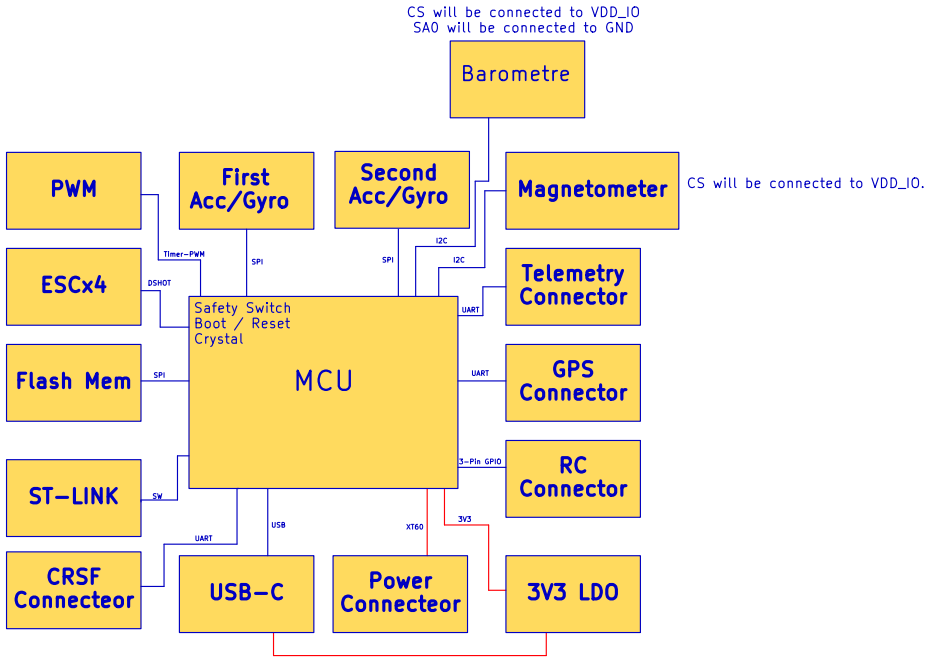

The communication protocols and their quantities used on the page are listed.
The quantity and names of the components on the page are listed.
This page provides a summary explanation of the project using block diagrams.
Schematic Block Diagram

Erdem

Sheet: /Block Diagram/
File: MiniTULPAR.kicad_sch

Title: TulparMini Block Diagram

Size: A4

Date: 2026-08-10

Rev: A

KiCad E.D.A. 10.0.4

Id: 1/3