


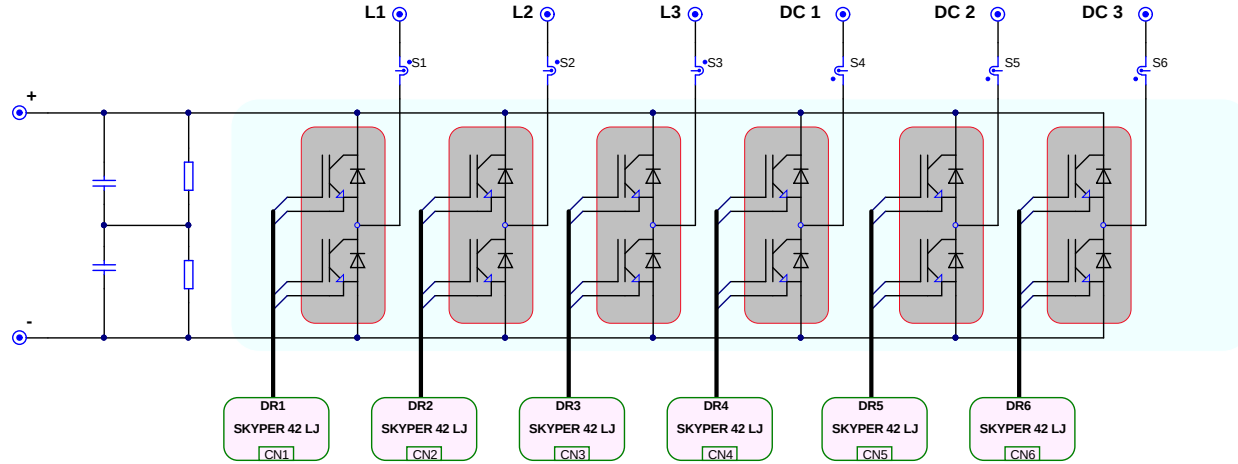

CN1/CN2/CN3 :
 CN :1_ SHIELD IF J1, J4 AND J7 IS CLOSED
 CN :2_ BOT SIGNAL INPUT
 CN :3_ ERROR OUTPUT (LOW LEVEL)
 CN :4_ TOP SIGNAL INPUT
 CN :5_ NOT CONNECTED
 CN :6_ NOT CONNECTED
 CN :7_ NOT CONNECTED
 CN :8_ +15V
 CN :9_ +15V
 CN :10_ GND
 CN :11_ GND
 CN :12_ NOT CONNECTED
 CN :13_ NOT CONNECTED
 CN :14_ NOT CONNECTED

CN4/CN5/CN6 :
 CN :1_ SHIELD IF J1, J4 AND J7 IS CLOSED
 CN :2_ BOT SIGNAL INPUT
 CN :3_ ERROR OUTPUT (LOW LEVEL)
 CN :4_ TOP SIGNAL INPUT
 CN :5_ NOT CONNECTED
 CN :6_ NOT CONNECTED
 CN :7_ NOT CONNECTED
 CN :8_ +15V
 CN :9_ +15V
 CN :10_ GND
 CN :11_ GND
 CN :12_ NOT CONNECTED
 CN :13_ NOT CONNECTED
 CN :14_ NOT CONNECTED

Interlock dead time configuration: 2 us interlock dead time
Gate driver parameters: See data sheet SKYPER 42 LJ
Input Signal (TOP and BOT): +15 V high / 0 V low
Power Supply - Gate Driver voltage primary side: min 14.4 V and max. 15.6 V

Remarks

APLICAÇÃO:				DIMENSÕES SEM TOLERÂNCIAS CONF.		ACABAMENTO	ESC.	PESO LIQ.		BRUTO	
FEITO DE:							MAT. PRIMA				
					DATA	NOME	DENOMINAÇÃO				
				DES.	03.03.20	R. MIRANDA	SKS 61W B6CI+(E1CIF)3P 40 V12				
				APROV.	03.03.20	J.FONSECA					
							REF. 7				
							NÚMERO		EDIÇÃO	FOLHA	
							08648280		00	1	
										1 FLS.	
00	16778	03.03.20	RRM	SEMIKRON SEMIKRON SEMICONDUCTORES Ltda Av. Inocêncio Seráfico 6300 06366-900 Carapicuíba SP-Brasil			GRUPO 420		SUBSTITUI		ED
REV.	AP/MODIFICAÇÃO	DATA	NOME				ORIGEM: Origem				