

Produkte
Products

Prüfbericht - Nr.: 50183074 002 <i>Test Report No.:</i>			Seite 1 von 4 <i>Page 1 of 4</i>		
Auftraggeber: <i>Client:</i>			Xinxiang Hongli Supply Source Technology Co., Ltd. West Section of Xinglong Road, Xinxiang Economic Development Zone, Xinxiang City, Henan, P.R. China		
Gegenstand der Prüfung: CYLINDRICAL LITHIUM-ION RECHARGEABLE CELL <i>Test item:</i>					
Bezeichnung: <i>Identification:</i>		IMR18650-1500mAh, IMR18650-1200mAh		Serien-Nr.: <i>Serial No.:</i>	
Wareneingangs-Nr.: <i>Receipt No.:</i>		168368832		Eingangsdatum: 2022-04-22 <i>Date of receipt:</i>	
Prüfort: <i>Testing location:</i>			TÜV Rheinland (Shenzhen) Co., Ltd. 1F East & 2-4F, Cybio Technology Building No.1, No.16 Kejibei 2nd Road, High-Tech Industrial Park North Nanshan District, 518057, Shenzhen, China		
Prüfgrundlage: <i>Test specification:</i>			UL 1642:2020		
Prüfergebnis: <i>Test Result:</i>			Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n). <i>The test item passed the test specification(s).</i>		
Prüflaboratorium: <i>Testing Laboratory:</i>			TÜV Rheinland (Shenzhen) Co., Ltd. 1F East & 2-4F, Cybio Technology Building No.1, No.16 Kejibei 2nd Road, High-Tech Industrial Park North Nanshan District, 518057, Shenzhen, China		
geprüft/ tested by:  2022-05-11 Revan Dai/Project Engineer kontrolliert/ reviewed by:  2022-05-11 Kaman Qiu/Reviewer					
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>
Sonstiges/ Other Aspects: TÜV Rheinland TÜVus mark approval procedure. The complete test report includes the following documents: - UL 1642 Test report (4 pages); - Attachment 1: Equipment list (1 page); - Attachment 2: Photo documents (2 pages).					
Abkürzungen:			Abbreviations:		
P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet			P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested		
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

Test item particulars:

Information about the product needed to establish a correct test program, such as product mobility, type of power connections and similar. (Test item particulars are selected by the TRF Originator base on the requirements in the standard)

Designation : IMR18650-1500mAh, IMR18650-1200mAh

Trademark : N/A

Nominal voltage : 3.7V

Rated capacity : 1500mAh (for IMR18650-1500mAh), 1200mAh (for IMR18650-1200mAh)

Maximum charge voltage : 4.2V

End discharge voltage : 3.0V

Manufacturer's charge method : Charging the cell with 0.2C constant current and 4.2V constant voltage until the current reduces to 0.02C.

Utilization Type : Technician replaceable cell

Sample Number : A003248876 001 to A003248876 010

Possible test case verdicts:

Test case does not apply to the test object : N/A

Test object does meet the requirement : P(ass)

Test object does not meet the requirement : F(ail)

Testing:

Date of receipt of test item : 2022-04-25

Date(s) of performance of tests : 2022-04-25 to 2022-05-07

General remarks:

This report shall not be reproduced, except in full, without the written approval of the testing laboratory.

The test results presented in this report relate only to the object tested.

"(see remark #)" refers to a remark appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a point is used as the decimal separator.

Copy of marking plate:

See original report 50183074 001.

Summary of testing:

The component cell is evaluated in this test report per the following test items according to UL 1642:2020
Charging method declared by the manufacturer:
Charging the cell with 0.2C constant current and 4.2V constant voltage until the current reduces to 0.02C.

Test items:

See original report 50183074 001 and retest cl.20 Projectile Test.

Construction:

See original report 50183074 001.

Factory location :

Xinxiang Hongli Supply Source Technology Co., Ltd.
West Section of Xinglong Road, Xinxiang Economic Development Zone, Xinxiang City, Henan, P.R. China

Description of the product:

This test report shall be read in conjunction with the original report 50183074 001.

All test datas are base on report No.: 50183074 001, certificate No.: US 72182399 01 except the Projectile Test.

The Projectile Test was retested considering that the Projectile Test was different.

Model	Rated capacity	Nominal voltage	Nominal Charge current	Nominal discharge current	Max. charge current	Max. discharge current	Max. charge voltage	End discharge voltage
IMR18650-1500mAh	1500mAh	3.7V	300mA	300mA	750mA	750mA	4.2V	3.0V
IMR18650-1200mAh	1200mAh	3.7V	240mA	240mA	600mA	600mA	4.2V	3.0V

1. Upgrade standard version from "UL 1642: 2012" to "**UL 1642: 2020**".
2. Change applicant address from "Dayang Village South, zhaipo Town, Xinxiang, China" to "**West Section of Xinglong Road, Xinxiang Economic Development Zone, Xinxiang City, Henan, P.R. China**"
3. Change factory address from "Dayang Village South, zhaipo Town, Xinxiang, China" to "**West Section of Xinglong Road, Xinxiang Economic Development Zone, Xinxiang City, Henan, P.R. China**"

For the above described change(s) the following test item was considered to be necessary:

Change	Testing	Comments	Result
1	Cl.20 Projectile Test	Supplemental Difference Test	P
2, 3	N/A	No related test were considered necessary.	P

History of amendments and modifications:

Ref. No. 50183074 001, dated 2018-11-08 (original test report)

Ref. No. 50183074 002, dated 2022-05-11 (1st modification)

UL 1642:2020			
Clause	Requirement + Test	Result - Remark	Verdict
20	Projectile Test		P
20.1	When subjected to the test described in 20.2 - 20.5 no part of an exploding cell or battery shall penetrate the wire screen such that some or all of the cell or battery protrudes through the screen.	The test results meet the requirements.	P
20.2	Each test sample cell or battery is to be placed on a screen that covers a 102-mm (4-inch) diameter hole in the center of a platform table. The screen is to be constructed of steel wire mesh having 20 openings per 25.4 mm (1 in) and a wire diameter of 0.43 mm (0.017 in).	Prepared the test as required.	P
20.3	The screen is to be mounted 38 mm (1-1/2 in) above a Meker type burner. The fuel and air flow rates are to be set to provide a bright blue flame that causes the supporting screen to glow a bright red.	Prepared the test as required.	P
20.4	An eight-sided covered wire cage, 610-mm (2-ft) across and 305-mm (1-ft) high, made from metal screening is to be placed over the test sample. See Figure 20.1. The metal screening is to be constructed from 0.25-mm (0.010-in) diameter aluminum wire with 16 -18 wires per 25.4 mm (1 inch) in each direction.	Tested as required.	P
20.5	The sample is to be heated and shall remain on the screen until it explodes or the cell or battery has ignited and burned out. It is not required to secure the sample in place unless it is at risk of falling off the screen before the test is completed. When required, the sample shall be secured to the screen with a single wire tied around the sample.	Tested as required.	P


Produkte
Products

	Eq. No.	Name	Manufacturer	Model No.	Date of Calibration	Date of next Calibration
☒	2.040	Battery Testing System	NEWARE	CT-4008-5V6A-S1-F	2021.10.18	2022.10.17
☒	2.049	Projectile Test Equipment	Dongguan Bell Experiment Equipment Co., Ltd.	BE-8105	--	*)


*) Initial calibration or verification only

Product: CYLINDRICAL LITHIUM-ION RECHARGEABLE CELL

Type Designation: IMR18650-1500mAh, IMR18650-1200mAh

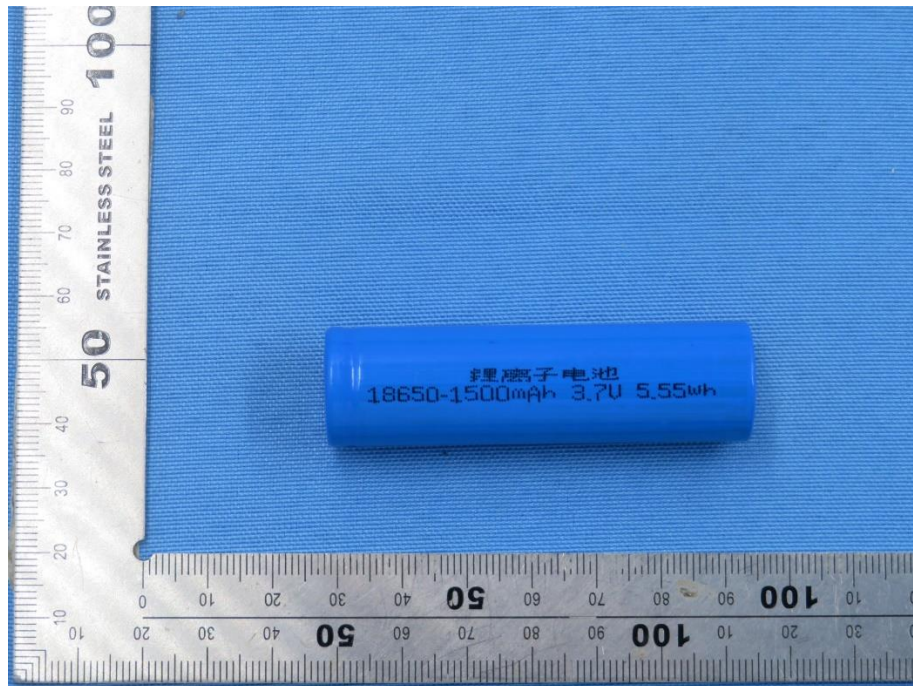


Picture 1. Main view of cell (IMR18650-1500mAh)

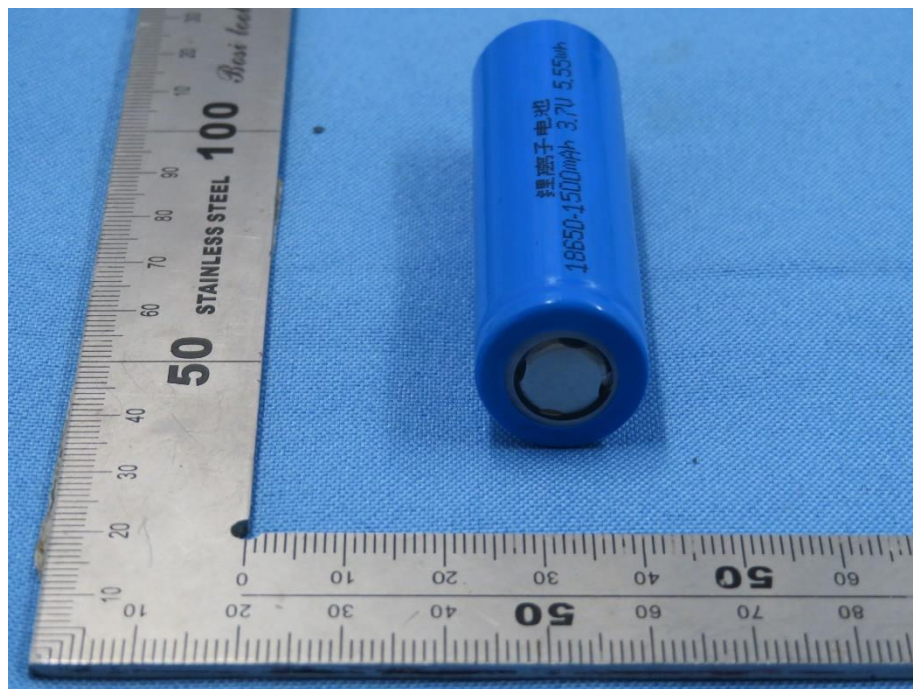


Picture 2. Side view of cell (IMR18650-1500mAh)

Product: CYLINDRICAL LITHIUM-ION RECHARGEABLE CELL

Type Designation: IMR18650-1500mAh, IMR18650-1200mAh

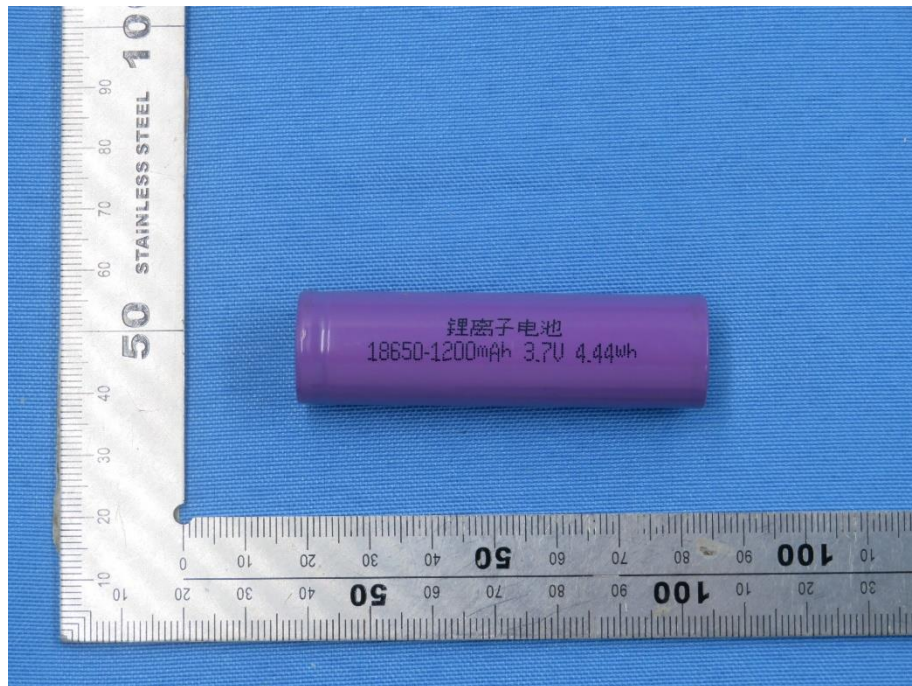

Picture 3. Main view of cell (IMR18650-1200mAh)

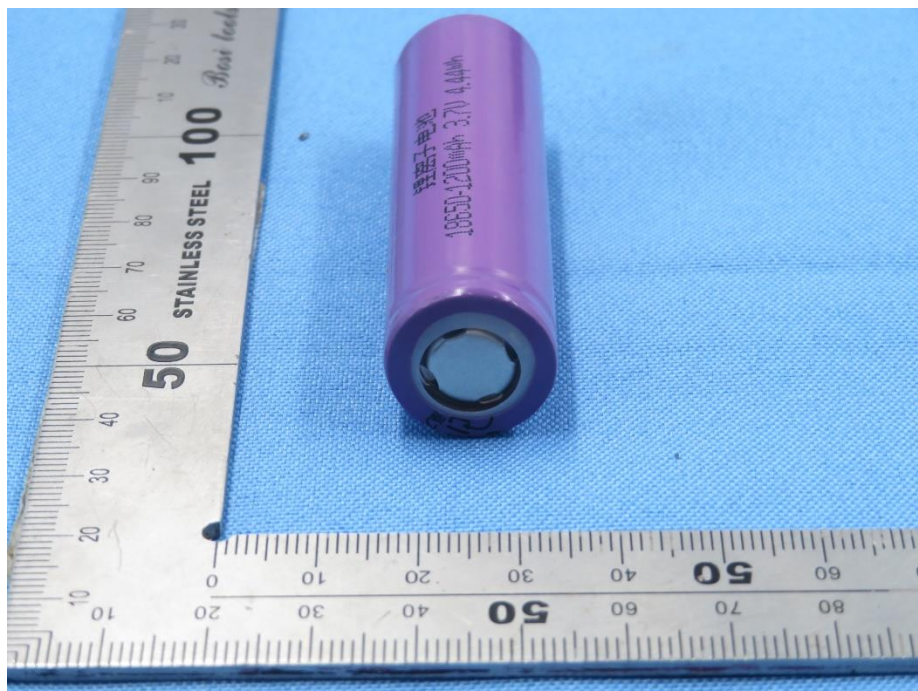

Picture 4. Side view of cell (IMR18650-1200mAh)