



M A T E R I A L S	BODY	BRASS NICKEL PLATED
	CONTACT	GOLD PLATED
	INSULATOR	PTFE
	GASKET	RUBBER
E L C T R I C A L	IMPEDANCE	50 OHMS
	FREQUENCY RAGE	DC - 300 MHz
	OPERATING VOLTAGE	3,500 VOLTS RMS 5,000 VOLTS DC
H A R D W A R E	CLAMP NUT	WASHER
	CONTACT	NUT
	GASKET	WASHER
	BRAID CLAMP	GASKET

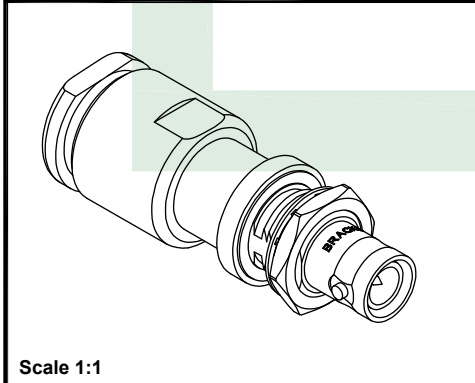

Scale 1:1

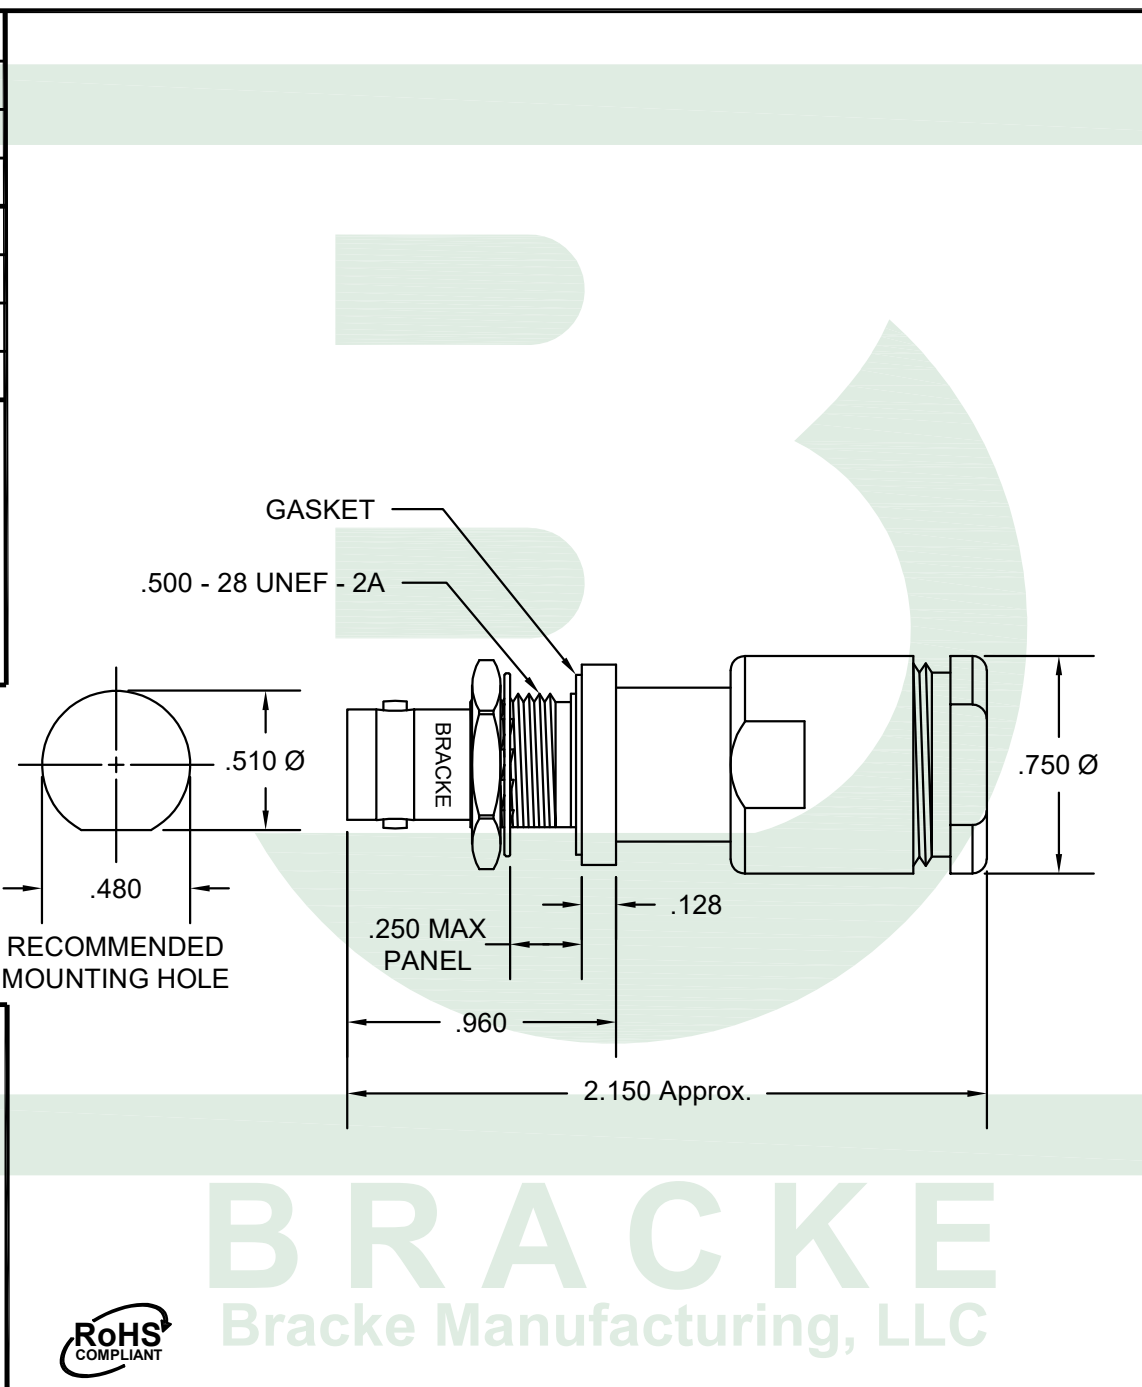

BRACKE
Bracke Manufacturing, LLC

- 1- STRIP CABLE AS SHOWN
- 2- SLIDE HARDWARE ON CABLE
- 3- FORM BRAID WIRES OVER CLAMP AND CUT EXCESS AT SHOULDER
- 4- INSERT CENTER CONDUCTOR INTO CONTACT
5- SOLDER CONTACT TO CENTER CONDUCTOR
- 6- INSERT SUBASSEMBLY INTO BODY
7- TIGHTEN USING WRENCHES 5/8" FOR NUT AND 11/16" FOR BODY
- 8- INSTALL HARDWARE ON CONNECTOR

	Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949) 756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com		Part Number BM60261	Description SHV Jack Bulkhead 50 Ohm, Clamp Connector [RG8, RG9, RG213, RG214, RG225, RG393]	CAGE / NAGE 6LOW2
	Produced By 002		Checked By 013	Notes <ul style="list-style-type: none"> Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. 	Scale 1.5:1
				Date 5/07/2020	Unit Inches
				Revision A-01	©2020 Bracke Manufacturing, LLC