

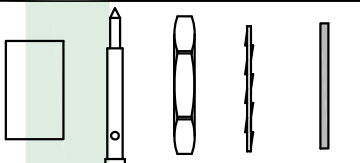



M A T E R I A L S	BODY	BRASS NICKEL PLATED
	CONTACT	GOLD PLATED
	INSULATOR	PTFE
	GASKET	RUBBER
E L E C T R I C A L S	IMPEDANCE	50 OHMS
	FREQUENCY RANGE	DC - 300 MHz
	OPERATING VOLTAGE	3,500 VOLTS RMS 5,000 VOLTS DC
H A R D W A R E		
	FERRULE CONTACT NUT WASHER GASKET	

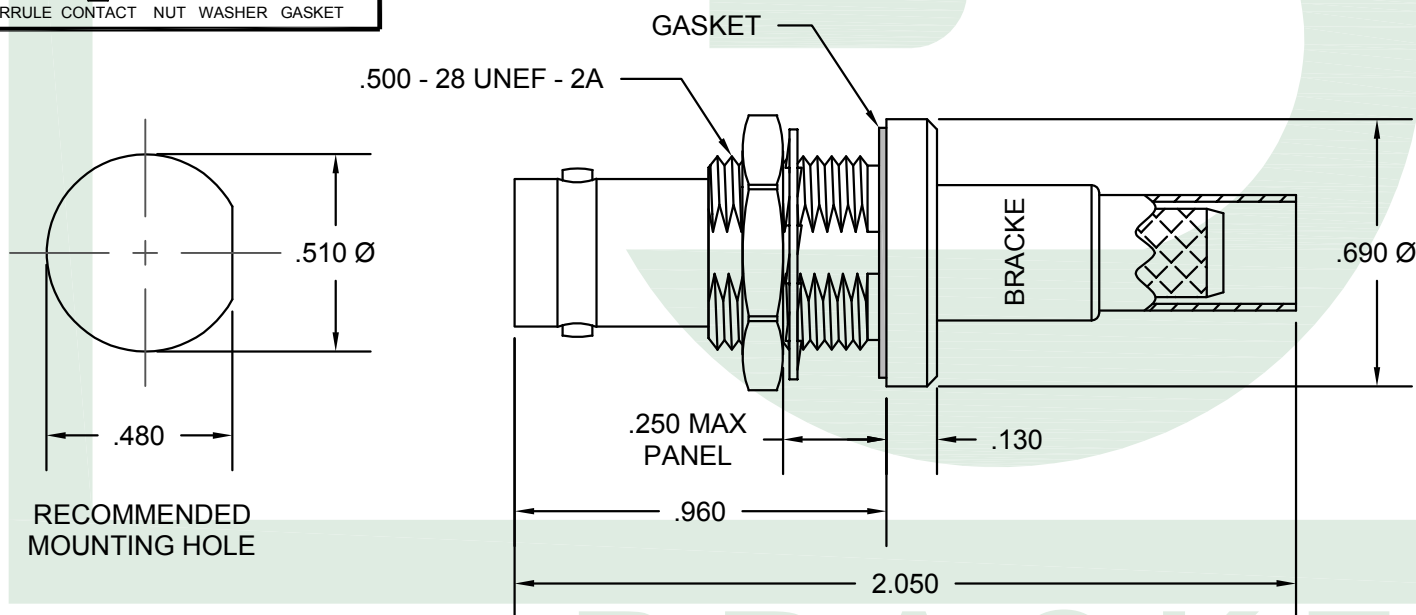


**BRACKE**  
Bracke Manufacturing, LLC

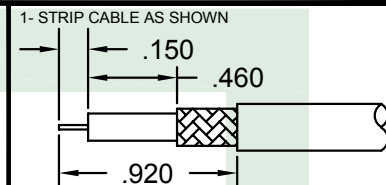


2- INSERT CENTER CONDUCTOR INTO CONTACT  
3- SOLDER CONTACT TO CENTER CONDUCTOR




4- SLIDE FERRULE ON CABLE




5- INSERT CABLE INTO BODY




6- SLIDE FERRULE BACK



7- CRIMP FERRULE USING .255" HEX SIZE



8- INSTALL HARDWARE ON CONNECTOR



**Bracke Manufacturing, LLC**  
PO Box 12319  
Newport Beach, Ca 92658  
Phone (949) 756-1600 / Fax (949) 756-1601  
sales@brackemfg.com / www.brackemfg.com

Part Number	
<b>BM61482</b>	
Produced By	Checked By
002	013

**Description**  
**SHV Jack Bulkhead**  
50 Ohm, Crimp Connector [RG59, RG62]

**Notes**

- Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.
- The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.

©2019 Bracke Manufacturing, LLC

CAGE / NAGE	
6LOW2	
Scale	Units
2:1	Inches
Date	Revision
02/15/2019	A-01