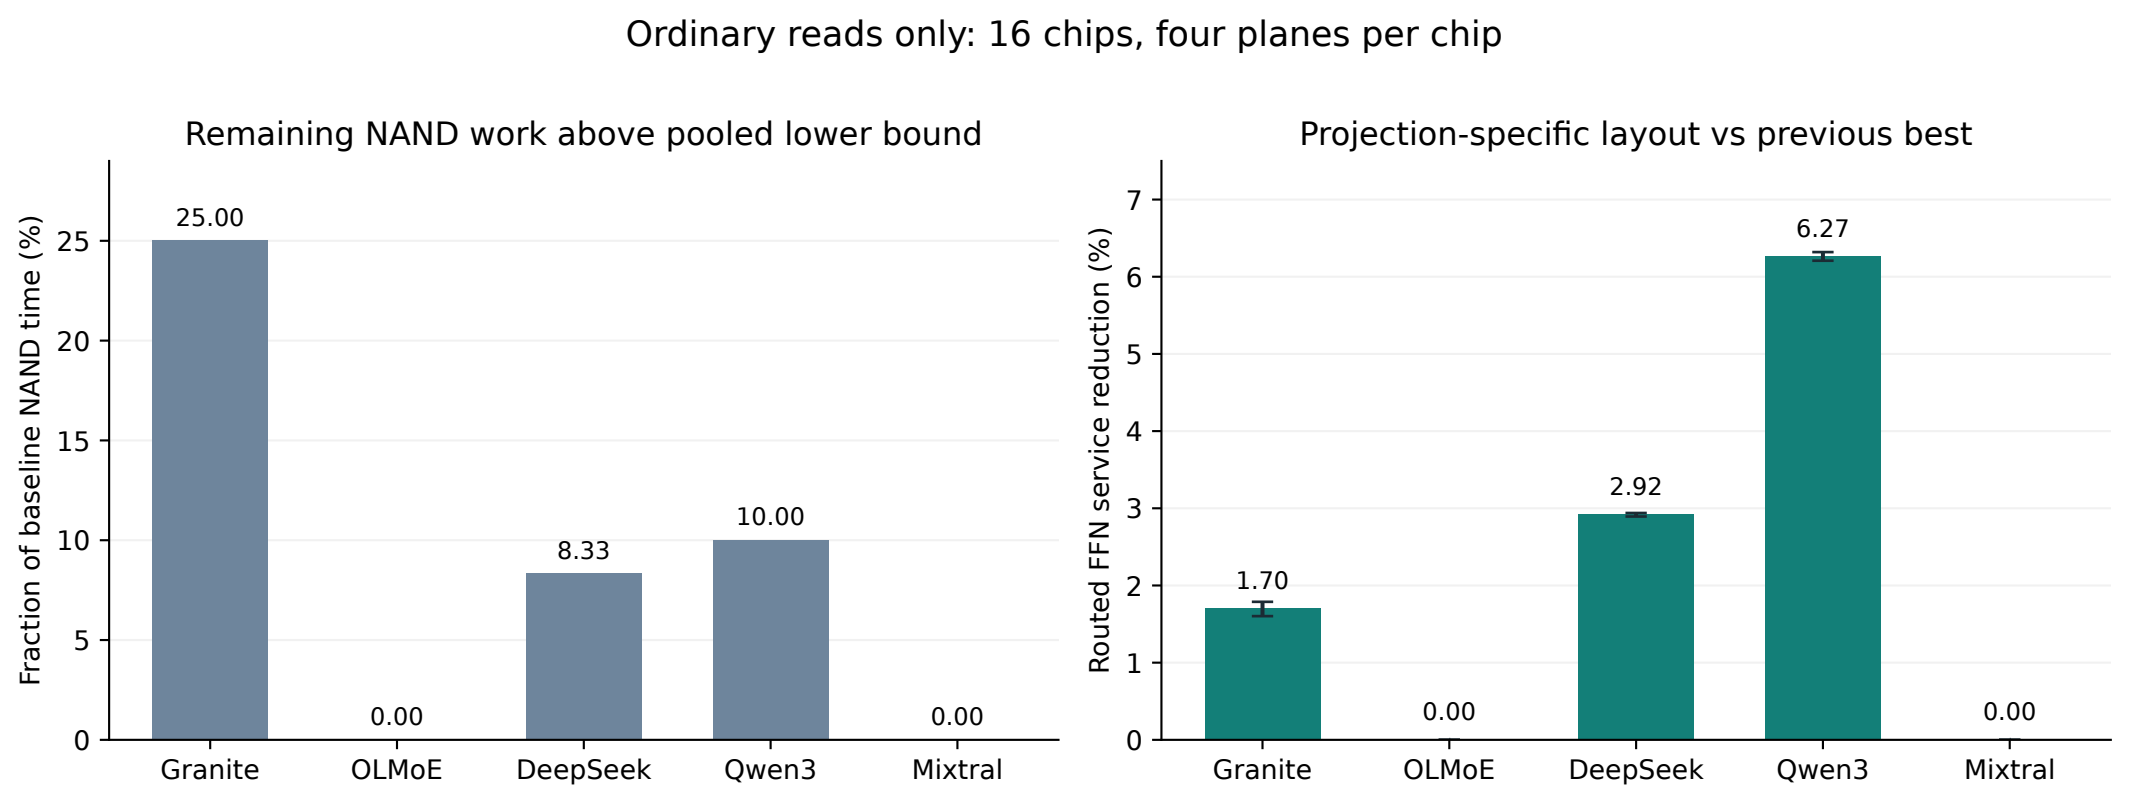
Ordinary reads only: 16 chips, four planes per chip
Remaining NAND work above pooled lower bound
Fraction of baseline NAND time (%)
0
5
10
15
20
25
25.00
0.00
8.33
10.00
0.00
Granite
OLMoE
DeepSeek
Qwen3
Mixtral
Projection-specific layout vs previous best
Routed FFN service reduction (%)
0
1
2
3
4
5
6
7
1.70
0.00
2.92
6.27
0.00
Granite
OLMoE
DeepSeek
Qwen3
Mixtral
Trace-driven cost model. Right: 100 reused test prompts/model, 128 decode steps; 95% paired prompt bootstrap. Not end-to-end hardware latency.