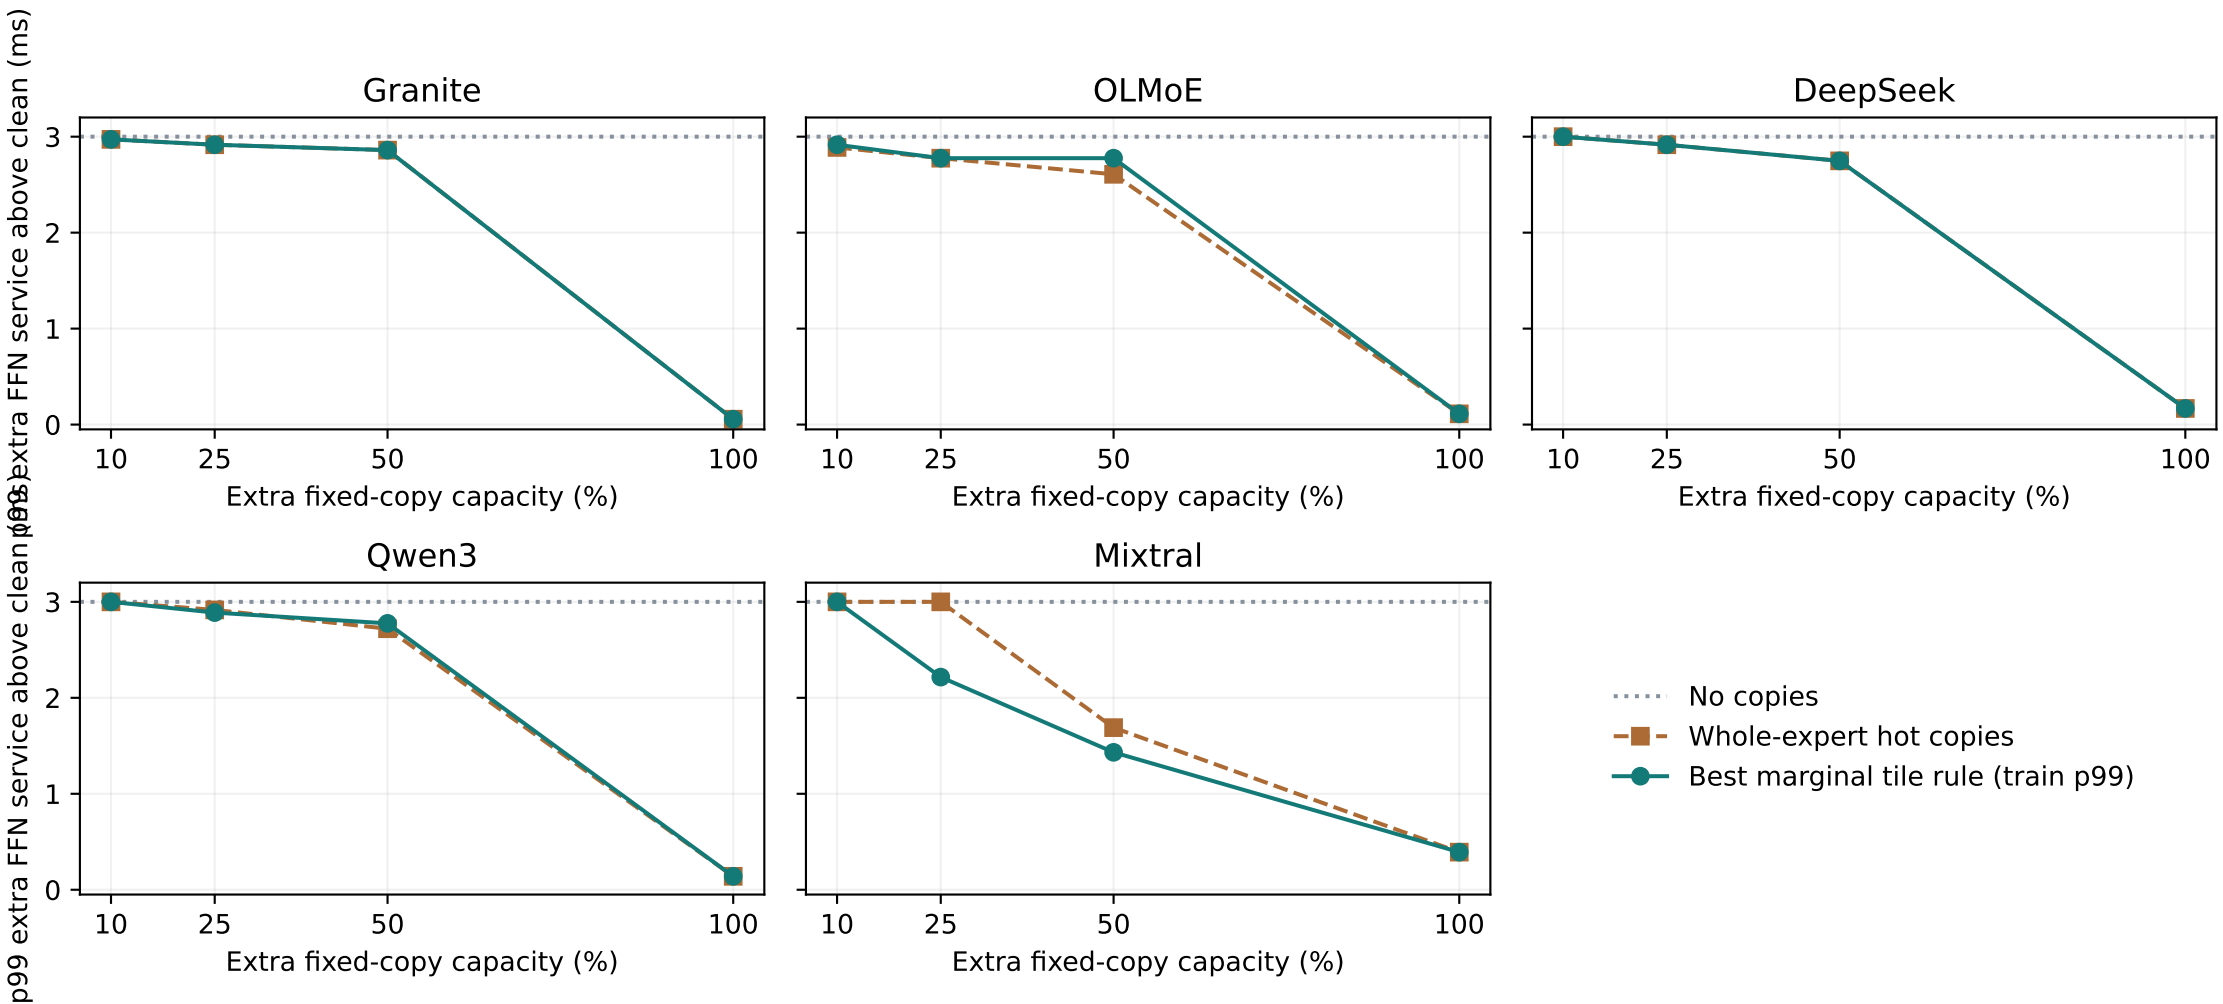

Synthetic iid phase collisions: p=0.001, fixed 3 ms residual stall; 100 validation prompts × 128 steps/model.
All policies use the same exact minmax tile redirection; addressing/channel changes omitted. Not hardware or full-model latency.