Fixed-source g8 GU: selected same-WL full waves, no IPR or pre-ECC drop

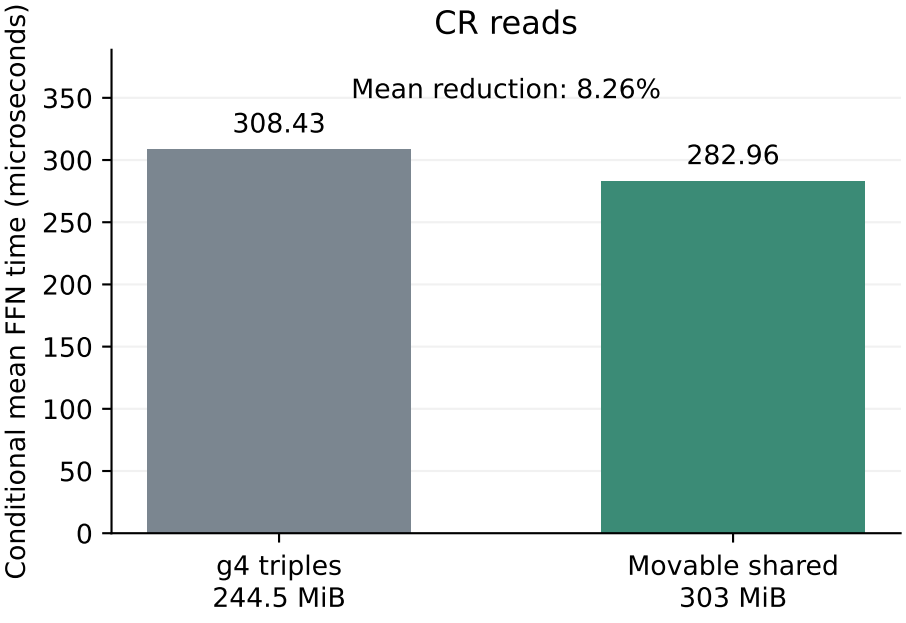


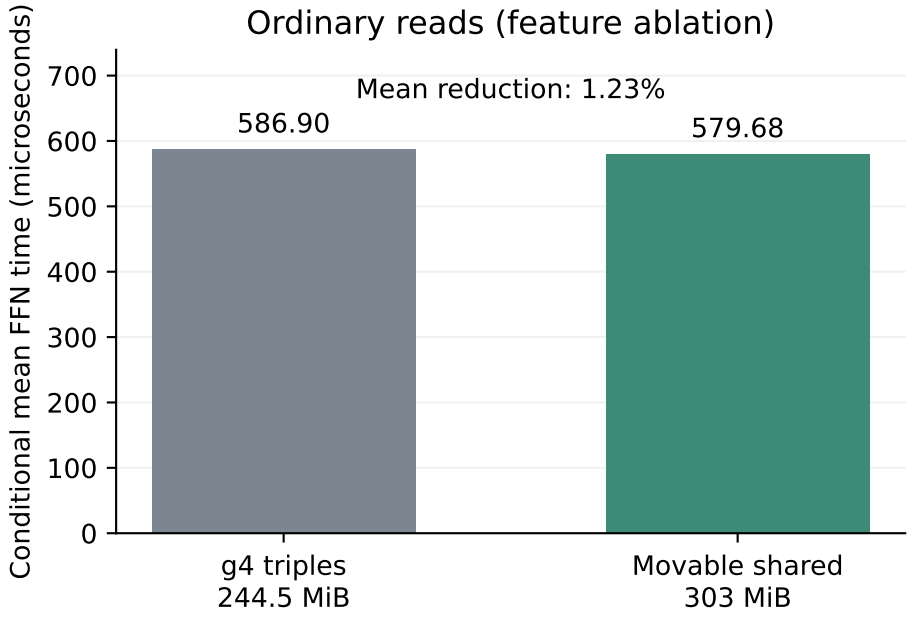


TRAIN input1 / GF; GU PB pressure pays explicit cold restart. Extra payload +58.5 MiB/layer is charged.
The ordinary-read gain is small; this is not evidence of a large speedup on every in-flash architecture.